

AVAILABLE MOUNTING CONFIGURATIONS

2STH-F FRAME MOUNT
2STH-EM ENGINE MOUNT

OPERATING LEVELS

MIN FLOW	50 GPM	11.5 m ³ /h
MAX FLOW	490 GPM	112.7 m ³ /h
DISCHARGE SIZE	2"	50 mm
SUCTION SIZE	3"	75 mm
SOLIDS HANDLING	1.5"	38 mm
MAX SPEED	2950 RPM	2950 RPM
SHUT-OFF HEAD	188'	57.3 m
BEP HEAD	132'	40.2 m
BEP FLOW	320 GPM	73.6 m ³ /h
BEP PERCENT	49%	49%



A typical picture of the pump is shown. Please contact Cornell Pump Company for further details. All information is approximate and for general guidance only.

PARTS

STANDARD MATERIAL (ALL IRON)

VOLUTE CASING	DUCTILE IRON, ASTM A536, 65-45-12
IMPELLER	DUCTILE IRON, ASTM A536, 100-70-03
IMPELLER SCREW	304 STAINLESS STEEL
BACKPLATE/BACKET	DUCTILE IRON, ASTM A536, 65-45-12
WEAR PLATE	MILD STEEL
BEARING FRAME	DUCTILE IRON, ASTM A536
SHAFT	17-4 PH STAINLESS STEEL
SHAFT SLEEVE	304 STAINLESS STEEL
FASTENERS	GRADE 5 STEEL
MECHANICAL SEAL	SILICON CARBIDE vs. SILICON CARBIDE, TYPE 2

- FIVE-YEAR warranty
- Optional self-cleaning wear plate
- Modular bearing frame
- Cornell's Cycloseal® with type 2 seal
- Dual protection of bearings with external seal leakage monitor (vent to atmosphere)
- High Heads up to 180'


HIGH-HEAD SELF-PRIMER

Cornell's self-priming pump, with industry-leading efficiency, runs several efficiency points higher than other manufacturers. Features patented Cycloseal® system and uniquely designed volute for best performance, with a 3" suction and 2" discharge.

- High-efficiency design
- Oversized oil reservoir for better cooling
- Replaceable shaft sleeve
- Heavy-duty ductile iron construction
- Designed for SAE conversion
- High RPM Capability



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL





OIL & GAS



REFRIGERATION



RENTAL

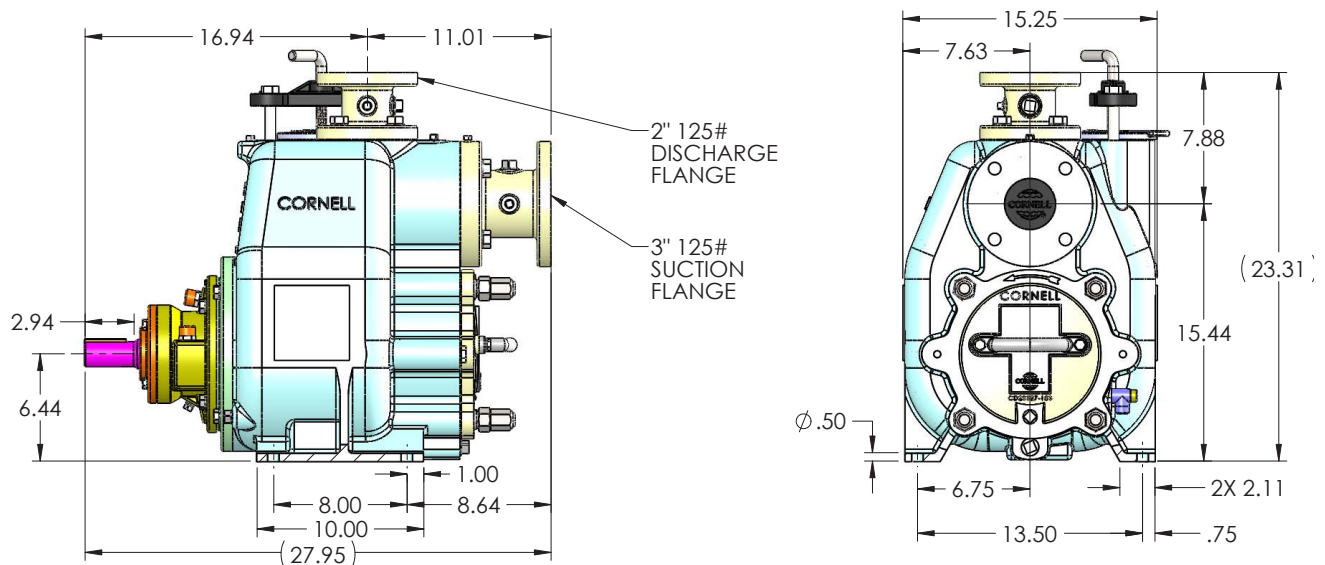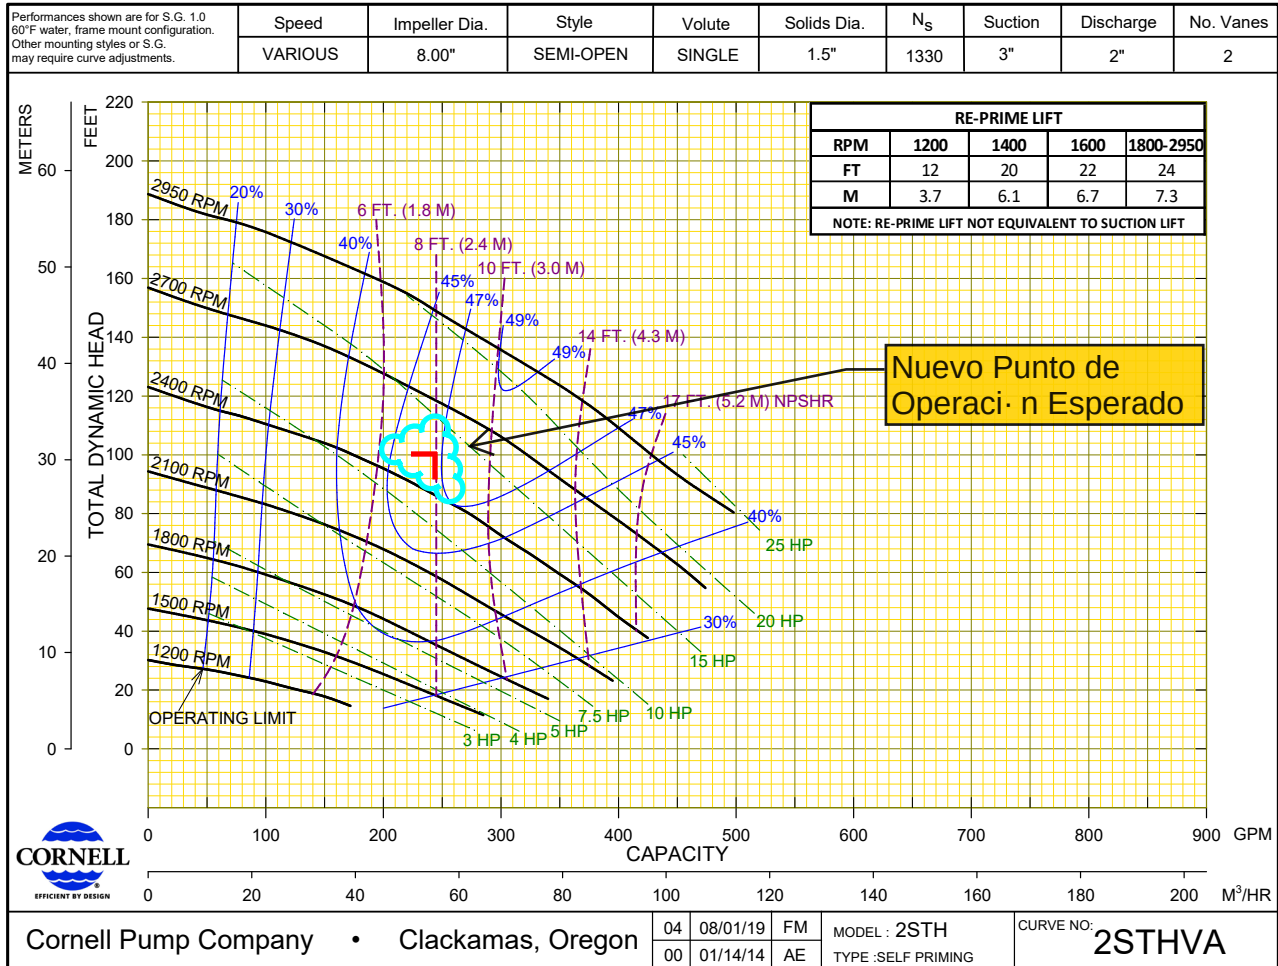

DS8STL-140826-P