

51B51/SIP-E3-X


Description: NaI(Tl) SiPM Scintillation detector with built in temperature compensated bias generator and preamplifier




Scintillation material	: NaI(Tl), Ø51 x 51mm
Drawing number	: V-1593
Crystal read out	: SiPM, Array J-60035-4P
Housing	: Aluminum
Diameter	: 59.2 mm
Height	: 75.3 mm
Power supply	: + 5 – 16 V (3 mA)
Warm up time	: 30 seconds
Electrical connections	: LEMO connector ERA0S302
	Pin 1 = +5 – 16 V
	Pin 2 = Signal
Cable	: 3 meter long LIYCY with flying leads
	Brown = power supply (+5 - 16 V)



Performance

Pulse rise time (0-100%)	: 560 ns
Pulse fall time (1/e)	: 1.4µs
Gain	: Approx. 450 mV/MeV
Energy resolution	: < 7.5 % FWHM @ 662keV
Noise level	: < 15 keV

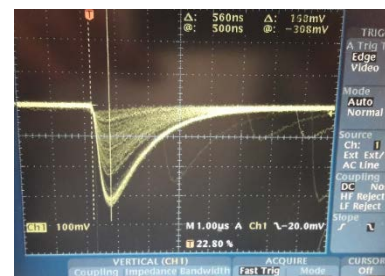

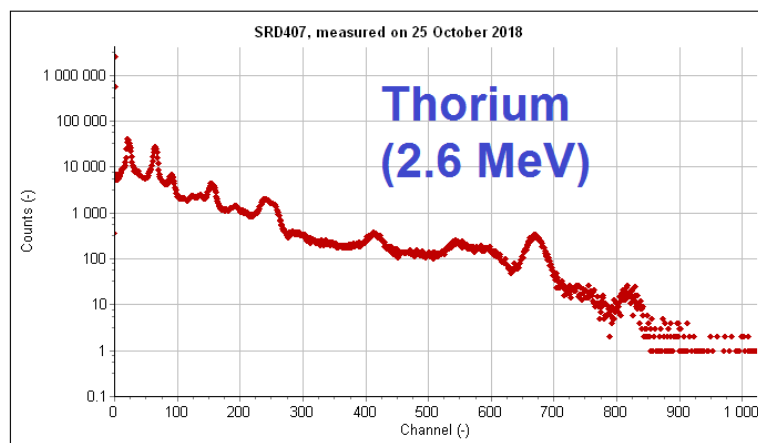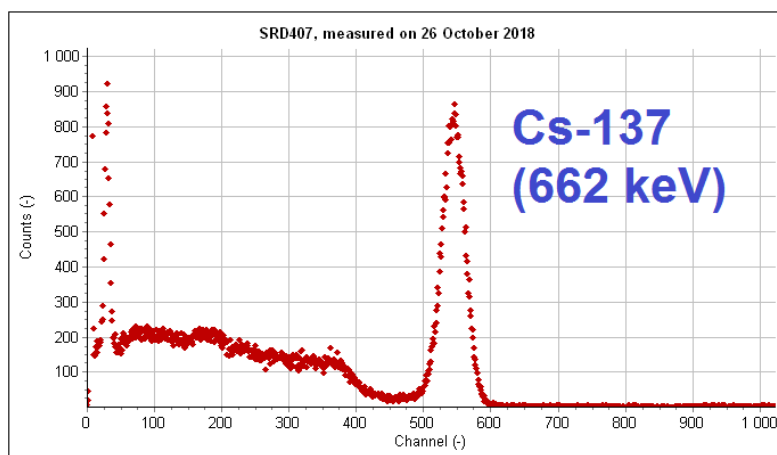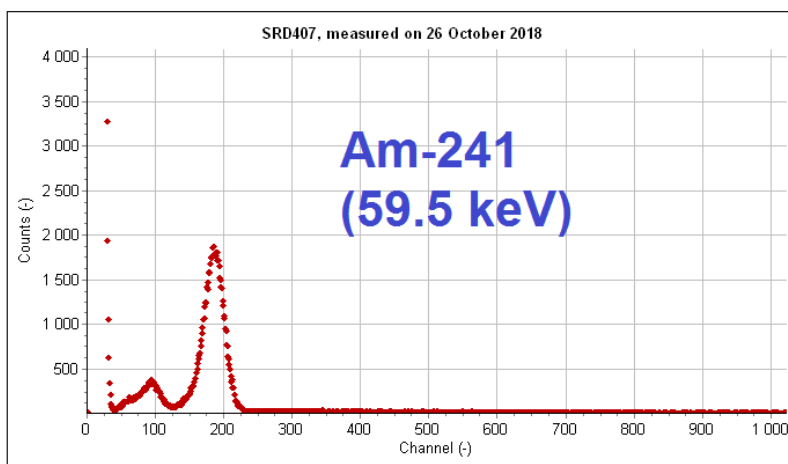

Typical energy spectra

Last revision: 29-10-2018
Revision number: 0
Document Name: 51B51_SIP-E3-X