

# ProASIC<sup>PLUS</sup> RAM/FIFO Blocks

## Introduction

The memory in the ProASIC<sup>PLUS</sup> family provides great configuration flexibility. Unlike many other programmable logic devices, each ProASIC<sup>PLUS</sup> block is designed and optimized as a two-port memory (1 read, 1 write). This provides up to 198kbits of total memory for two-port and single port usage. Each memory can be configured as a FIFO or SRAM with independent selection of synchronous or asynchronous read and write ports. Additional characteristics include programmable flags as well as parity checking and generation. The SRAM/FIFO memories perform at up to 150 MHz (typical) when operated individually. Each block contains a 256-word, 9-bit wide (1 read port, 1 write port) memory. The memory blocks may be combined to form wider memories or deeper memories. This provides bit widths of 9 (1 block), 18, 36, and 72, and depths of 256, 512, 768, and 1,024. Actel's ACTgen software

provides a user-friendly graphical interface that enables users to quickly design memories containing these configurations.

## Embedded Memory Floorplan

The embedded memory is located across the top and bottom (except APA075 and APA150 which are top only) of the device in 256x9 blocks. Depending upon the device, up to 88 blocks are available to support a variety of memory configurations. Each block can be programmed as an independent memory or can be combined (using dedicated memory routing resources) to form larger, more complex memories. A single memory configuration cannot include blocks from both the top and bottom memory locations. The maximum number of blocks for a single configuration is up to 44 for the APA1000. See [Table 1](#) for memory configuration details of all ProASIC<sup>PLUS</sup> FPGAs.

**Table 1 • Maximum Memory Configuration Sizes**

Device	Bottom Number of 256x9 Blocks (organization)	Top Number of 256x9 Blocks (organization)	Wide Maximum Size		Deep Maximum Size	
			D (bits)	W (bits)	D (bits)	W (bits)
APA075	0	12 (2x6)	256	54	1,536 (6x256)	18 (9x2)
APA150	0	16 (2x8)	256	144	2,048 (8x256)	18 (9x2)
APA300	16 (2x8)	16 (2x8)	256	144	2,048 (8x256)	18 (9x2)
APA450	24 (2x12)	24 (2x12)	256	216	3,072 (12x256)	18 (9x2)
APA600	28 (2x14)	28 (2x14)	256	252	3,584 (14x256)	18 (9x2)
APA750	32 (2x16)	32 (2x16)	256	288	4,096 (16x256)	18 (9x2)
APA1000	44 (2x22)	44 (2x22)	256	396	5,632 (22x256)	18 (9x2)

## Naming Convention for RAMs

RAM model names can have up to four parts:

- Base name indicating the type and size (RAM256X9)
- One character code designating the write port as asynchronous (A) or synchronous (S).
- One or two character code designating the read port as asynchronous (A), synchronous registered (SR), or synchronous transparent (ST).
- Optional one character code designating parity (P) generated.

For example: RAM256X9SAP is a 256-word by 9-bit RAM with synchronous write and asynchronous read ports using the generate parity feature.

## Naming Convention for FIFOs

FIFO model names are the same as the RAM model name except for the base name FIFO.

For example: FIFO256X9SSRP, a 256-word by 9-bit FIFO with synchronous write and synchronous read ports (synchronous to separate clocks named RCLKS and WCLKS), has registered outputs and uses the generate parity feature.

## Basic Memory Configuration

Every memory on a chip may be configured independently as dual or single port SRAM or FIFO. This includes the possibility to have synchronous and asynchronous SRAMs or FIFOs configured side-by-side. In all of these modes, a parity bit (ninth bit) can be checked or generated. The parity is checked while reading data, and while writing data and the result of these checks is shown in two independent signals.

For the synchronous SRAMs and FIFOs, the memory can be configured in such a way that it acts like a transparent synchronous memory or like a synchronous memory with an output register for the data signals. [Table 2](#) shows the different memory modes that can be configured. Odd or even parity can be selected.


**Table 2 • Basic Memory Configuration**

Type	Write Access	Read Access	Parity	Library Cell Name
RAM	Asynchronous	Asynchronous	Checked	RAM256X9AA
RAM	Asynchronous	Asynchronous	Generated	RAM256X9AAP
RAM	Asynchronous	Synchronous Transparent	Checked	RAM256X9AST
RAM	Asynchronous	Synchronous Transparent	Generated	RAM256X9ASTP
RAM	Asynchronous	Synchronous Pipelined	Checked	RAM256X9ASR
RAM	Asynchronous	Synchronous Pipelined	Generated	RAM256X9ASRP
RAM	Synchronous	Asynchronous	Checked	RAM256X9SA
RAM	Synchronous	Asynchronous	Generated	RAM256X9SAP
RAM	Synchronous	Synchronous Transparent	Checked	RAM256X9SST
RAM	Synchronous	Synchronous Transparent	Generated	RAM256X9SSTP
RAM	Synchronous	Synchronous Pipelined	Checked	RAM256X9SSR
RAM	Asynchronous	Synchronous Pipelined	Generated	RAM256X9SSRP
FIFO	Asynchronous	Asynchronous	Checked	FIFO256X9AA
FIFO	Asynchronous	Asynchronous	Generated	FIFO 256X9AAP
FIFO	Asynchronous	Synchronous Transparent	Checked	FIFO 256X9AST
FIFO	Asynchronous	Synchronous Transparent	Generated	FIFO 256X9ASTP
FIFO	Asynchronous	Synchronous Pipelined	Checked	FIFO 256X9ASR
FIFO	Synchronous	Synchronous Pipelined	Generated	FIFO 256X9ASRP
FIFO	Synchronous	Asynchronous	Checked	FIFO 256X9SA
FIFO	Synchronous	Asynchronous	Generated	FIFO 256X9SAP
FIFO	Synchronous	Synchronous Transparent	Checked	FIFO 256X9SST
FIFO	Synchronous	Synchronous Transparent	Generated	FIFO 256X9SSTP
FIFO	Synchronous	Synchronous Pipelined	Checked	FIFO 256X9SSR
FIFO	Synchronous	Synchronous Pipelined	Generated	FIFO 256X9SSRP

## Asynchronous SRAM

RAM256X9AA, Asynchronous SRAM, Parity Check

The ports of the asynchronous SRAM with the parity bit checked are shown in [Figure 1](#) and described in [Table 3](#). The name of this cell in the library is RAM256X9AA. During a read or a write cycle, the corresponding error flag 'RPE' for the read cycle or 'WPE' for the write cycle is generated. The 'PARODD' signal determines if the check is for even or odd parity. Odd parity is checked if the 'PARODD' signal is 'HIGH' and also if it is 'LOW.'

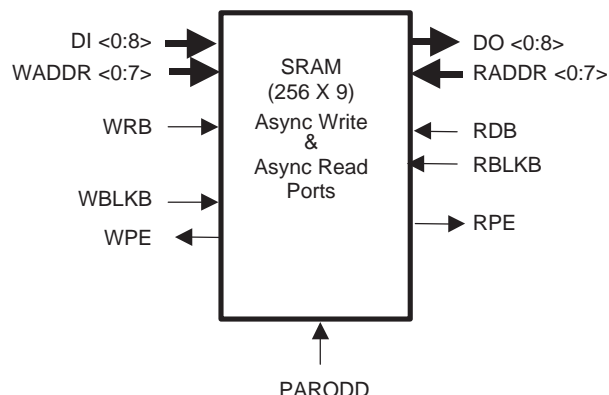

**Figure 1 • RAM256X9AA**

**Table 3 • Ports of the Asynchronous SRAM with Parity Bit Checked**

Name	Direction	Function
DO8 down to DO0	Out	Data Output
WPE	Out	Write Parity Error
RPE	Out	Read Parity Error
WADDR down to WADDR0	In	Write Address
RADDR7 down to RADDR0	In	Read Address
DI8 down to DI0	In	Data Input
WRB	In	Write (Bar = zero active)
RDB	In	Read (Bar = zero active)
WBLKB	In	Write block (Bar = zero active)
RBLKB	In	Read block (Bar = zero active)
PARODD	In	Parity Odd (when high)

RAM256X9AAP, Asynchronous SRAM, Parity Generated

The ports of the library cell RAM256X9AAP are shown in [Table 4](#). The main difference from the RAM256X9A is the WPE and RPE outputs. The data input still has nine signals although the ninth data input is internally used by the parity generator. The function of the remaining pins has not changed from the RAM256X9A library cell.


**Table 4 • Ports of the Library Cell RAM256X9AAP**

Name	Direction	Function
DO8 down to DO0	Out	Data Output
WADDR7down to WADDR0	In	Write Address
RADDR7 down to RADDR0	In	Read Address
DI8 down to DI0	In	Data Input
WRB	In	Write (Bar = zero active)
RDB	In	Read (Bar = zero active)
WBLKB	In	Write block (Bar = zero active)
RBLKB	In	Read block (Bar = zero active)
PARODD	In	Parity Odd (when high)

### FIFO256X9AA, Asynchronous FIFO, Parity Check

The ports of the asynchronous FIFO with the parity bit checked are shown in [Figure 2](#) and described in [Table 5](#). The special signals for the FIFOs are 'FULL,' 'EMPTY,' 'EQTH,' 'GEQTH,' 'LGDEP[2:0],' 'RESET,' and 'LEVEL[7:0].' The 'FULL,' 'EMPTY,' and 'RESET' signals are used as in every other standard FIFO. They indicate if the FIFO is completely empty or completely full, and 'RESET' sets the read and the write pointer back to zero, although it does not erase the data in the FIFO. The 'EQTH' and 'GEQTH' signals are also available to monitor if the FIFO is filled less than, equal to, or more than a user-specified level. For this purpose, a 'LEVEL' signal has to be provided to the FIFO. This 'LEVEL' signal is eight bits deep, so every level of the 256-bit blocks can be monitored. The 'LEVEL' signal is not allowed to be all '1' or all '0.' The 'EQTH' and 'GEQTH' signals are active HIGH. This means if the FIFO is less filled than the 'LEVEL' signal specifies, both signals are 'LOW.' If the FIFO is filled to the level, then both signals are 'HIGH.' If it is filled higher than the level, the 'EQTH' signal is 'LOW,' and the 'GEQTH' signal is 'HIGH.' If a FIFO shallower than 256 bits is needed,

this functionality can be created with the LGDEP[2:0] signal. This signal specifies the depth of the FIFO used in 2(LGDEP+1) steps. Therefore, it is possible to get FIFOs with a depth of 2, 4, 8, 16, 32, 64, 128, and 256 words.

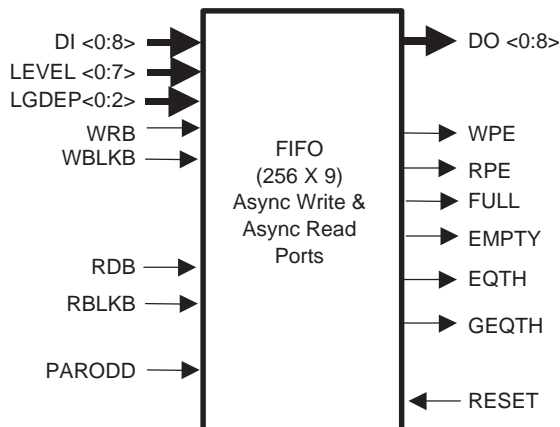

**Figure 2 • FIFO256X9AA**

**Table 5 • Ports of the FIFO256X9AA**

Name	Direction	Function
DO8 down to DO0	Out	Data Output
FULL	Out	FIFO full flag
EMPTY	Out	FIFO empty flag
EQTH	Out	Filled to the level specified by LEVEL signal
GEQTH	Out	Filled to or over the LEVEL
WPE	Out	Write Parity Error
RPE	Out	Read Parity Error
LGDEP2 down to LGDEP0	In	Defines DEPTH of the FIFO
RESET	In	RESETs FIFO read and write pointer
LEVEL7 down to LEVEL0	In	Specifies LEVEL of the EQTH & GEQTH
DI8 down to DI0	In	Data Input
WRB	In	Write (Bar = zero active)
RDB	In	Read (Bar = zero active)
WBLKB	In	Write block (Bar = zero active)
RBLKB	In	Read block (Bar = zero active)
PARODD	In	Parity ODD (when high)

FIFO256X9AAP, Asynchronous FIFO, Parity Bits Generated

The ports of the asynchronous FIFO with parity bit generated are described in Table 6. The only difference in the interface between the FIFO256X9AA and the FIFO256X9AAP are the missing parity read and write error flag pins 'WPE' and 'RPE.' In this configuration, the FIFO generates a parity bit from the eight lower bits and stores

the result as the ninth bit of the word. The polarity of the parity is dependent on the 'PARODD' input signal. If the signal is 'HIGH,' the parity is generated to have an odd parity, and if 'LOW' the parity will be even. If there is a ninth bit passed to the input line of the FIFO, the input signal will be (ignored and) overwritten with the parity setting.


**Table 6 • Ports of the FIFO256X9AAP**

Name	Direction	Function
DO8 down to DO0	Out	Data Output
FULL	Out	FIFO full flag
EMPTY	Out	FIFO empty flag
EQTH	Out	Filled to the level specified by LEVEL signal
GEQTH	Out	Filled to or over the LEVEL
LGDEP2 down to LGDEP0	In	Defines Depth of the FIFO
RESET	In	RESETs FIFO read and write pointer
LEVEL7 down to LEVEL0	In	Specifies LEVEL of the EQTH & GEQTH
DI8 down to DI0	In	Data Input
WRB	In	Write (zero active)
RDB	In	Read (zero active)
WBLKB	In	Write block (zero active)
RBLKB	In	Read block (zero active)
PARODD	In	Parity ODD (when high)

## Synchronous SRAMs

RAM256X9AST, Synchronous, Transparent SRAM, Parity Checked

The ports of a RAM256X9AST are shown in Figure 3 and listed in Table 7 on page 6. This memory cell is synchronous to the clock signal provided to the cell. The incoming data is stored in the memory on the rising edge of the clock signal. Since the memory is synchronous and transparent, the data out will be provided in the same clock cycle. For the pipelined or registered mode, the data out signals will be valid shortly after the next rising edge of the clock signal.

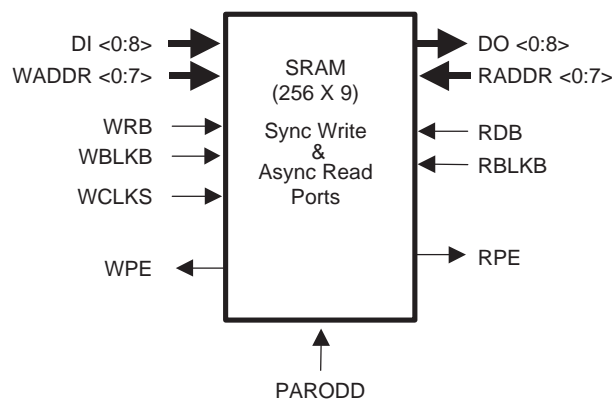

**Figure 3 • RAM256X9AST**

**Table 7 • Ports of a RAM256X9AST**

Name	Direction	Function
DO8 down to DO0	Out	Data Output
WPE	Out	Write Parity Error
RPE	Out	Read Parity Error
WADDR7 down to WADDR0	In	Write Address
RADDR7 down to RADDR0	In	Read Address
DI8 down to DI0	In	Data Input
WCLKS	In	Write Clocks
RCLKS	In	Read clocks
WRB	In	Write (zero active)
RDB	In	Read (zero active)
WBLKB	In	Write block (zero active)
PARODD	In	Parity ODD (when high)

The RDBLK signal on all synchronous memory cells is used internally to determine if the memory is in transparent or pipeline mode. As previously described, all the other signals have the same functionality.

RAM256X9SSR, Synchronous, Registered SRAM, Parity Checked

The interface of this cell is exactly the same as that of the RAM256X9AST (Table 7). The difference is that output data is valid shortly after the next rising edge of the clock.

RAM256X9ASTP, Synchronous, Transparent SRAM, Parity Generated

RAM256X9ASTP does not have the 'WPE' and 'RPE' output signals compared to the RAM256X9AST. The parity is generated internally while reading or writing the data. The lower eight bits are analyzed and the ninth bit is generated according to the 'PARODD' flag. When 'PARODD' is HIGH, parity is odd; when 'PARODD' is LOW, parity is even. If there is a ninth bit written to the memory, it will be (ignored) internally overwritten.


RAM256X9SSRP, Synchronous, Registered SRAM, Parity Generated

The RAM256X9SSRP has the same interface as the RAM256X9ASTP. The difference is again the timing of the output data. The STP RAM supplies the data in the same clock cycle before the next rising edge of the clock, and the SRP will supply the data as if it was registered internally, shortly after the next rising edge of the clock.

## Synchronous FIFOs

FIFO256X9AST, Synchronous, Transparent FIFO, Parity Checked

The FIFO256X9AST functionality is the same as the asynchronous FIFO except that the signals are stored and read out in relation to the clock signal. The data are stored with the rising edge of the clock, and the contents of the FIFO is shifted out in the same clock cycle. The ports of the synchronous FIFO with parity bit checked are shown in Figure 4 and described in Table 8 on page 7.

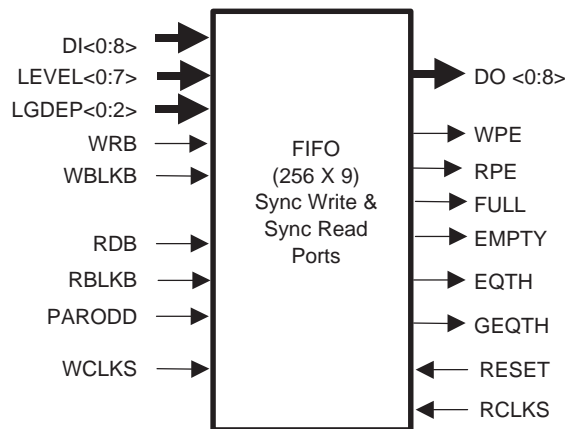
**Figure 4 • FIFO256X9AST**

**Table 8 • Ports of FIFO256X9AST**

Name	Direction	Function
DO8 down to DO0	Out	Data Output
FULL	Out	FIFO full flag
EMPTY	Out	FIFO empty flag
EQTH	Out	Filled to the level specified by LEVEL signal
GEQTH	Out	Filled to or over the LEVEL
WPE	Out	Write Parity Error
RPE	Out	Read Parity Error
WCLKS	In	Write Clocks
RCLKS	In	Read Clocks
LGDEP2 down to LGDEP0	In	Defines Depth of the FIFO
RESET	In	RESETs FIFO read and write pointer
LEVEL7 down to LEVEL0	In	Specifies LEVEL of the EQTH & GEQTH
DI8 down to DI0	In	Data Input
WRB	In	Write (zero active)
RDB	In	Read (zero active)
WBLKB	In	Write block (zero active)
RBLKB	In	Read block (zero active)
PARODD	In	Parity ODD (when high)

As previously described, the functionality of the signals stays the same, but the timing of the signals changes.

FIFO256X9ASR, Synchronous, Registered  
FIFO, Parity Checked

The interface is the same as the FIFO256X9ST; however, the timing for the outputs has changed. In registered mode, the data is provided after the next rising edge of the clock signal.

FIFO256X9ASTP, Synchronous, Transparent  
FIFO, Parity Generated

No 'WPE' and 'RPE' signals can be found, because the parity is not checked while reading or writing the data. Instead, it is generated from the lower eight bit of the input data. The ninth bit will be generated corresponding to the 'PARODD' signal for even ('LOW' 'PARODD' signal) or odd ('HIGH' 'PARODD' signal) parity in the resulting nine bit word. If there is a nine-bit written to the FIFO, it is internally overwritten and the content is lost.

FIFO256X9ASRP, Synchronous, Registered  
FIFO, Parity Generated

No 'WPE' and 'RPE' signals exist, because the parity is not checked while reading or writing the data, but it is generated from the lower eight bits of the input data. The ninth bit will be generated corresponding to the 'PARODD' signal (HIGH for odd parity, LOW for even parity). If there is a ninth bit written to the FIFO, it will be (ignored) internally overwritten.

## Deep and Wide, Synchronous RAMs and FIFOs

To have memories that are deeper or wider than the default 256x9 block, two or more RAM or FIFO cells have to be used. Actel's ACTgen software facilitates building wider and deeper memories for optimal memory usage. ACTgen automatically generates the 'glue' logic and a placement file for this logic when memories that are wider or deeper than the default size are selected. The following sections are for users who wish to understand the interconnecting logic better or wish to implement this logic by hand.

### Wider Memories

If a RAM with more than a nine-bit width is needed, two or more RAM cells of the same kind, e.g. RAM256X9SSR, have to be connected together. The functionality of a RAM256x18SSR is given, if all the input signals with the same names are connected to the same input nets except for the DO[17:0] signals. Additionally, the parity error flags have to be considered. If they are used, the question is if the parity is for the whole word of 16 bits plus parity, or if there will be two parity bits needed, one for each eight-bit word. If the parity has to be checked for every eight-bit word, then no additional logic is needed. If parity is needed on 16 bits, then additional logic will be needed.




## Deep Memories

### Deep RAMs


To create deep memories, slightly more user input is required compared to wide memories. For example, with the RAM512x9AST block, two RAM256X9 blocks will be needed to create the deep RAM. The most significant bit of the write address is the block select signal. Since just one of the blocks is active on a write cycle, this signal should be directly connected to the 'WBLKB' signal of one RAM block, and it should be inverted before connecting to the 'WBLKB' signal of the other block.

Multiplexers are used to choose which RAM cell provides the output data on a given read cycle. The most significant bit of the read address should be assigned to the select signal on the multiplexers. When more than two RAM blocks need to be connected, the multiplexor can be arranged in a

ripple form or as a tree (Figure 5). For timing reasons, the memory has a row of multiplexors directly connected to their 'DO' signals. These multiplexors are called DMUX. To enable the backend tool to place-and-route DMUX cells properly, the select signals for the DMUX cells have to be fed through the RAM blocks with which they are associated. The select signal is connected to the 'DIS' pin of the RAM256X9 block and then a net has to be created between the 'DOS' pin of the same RAM block and the select inputs of the DMUX cells. These connections are illustrated in Figure 5. If the 'RPE' or 'WPE' signals are used, they have to be multiplexed. No DMUX cells are available for these signals. Figure 5 and Figure 6 show the basic block diagrams.

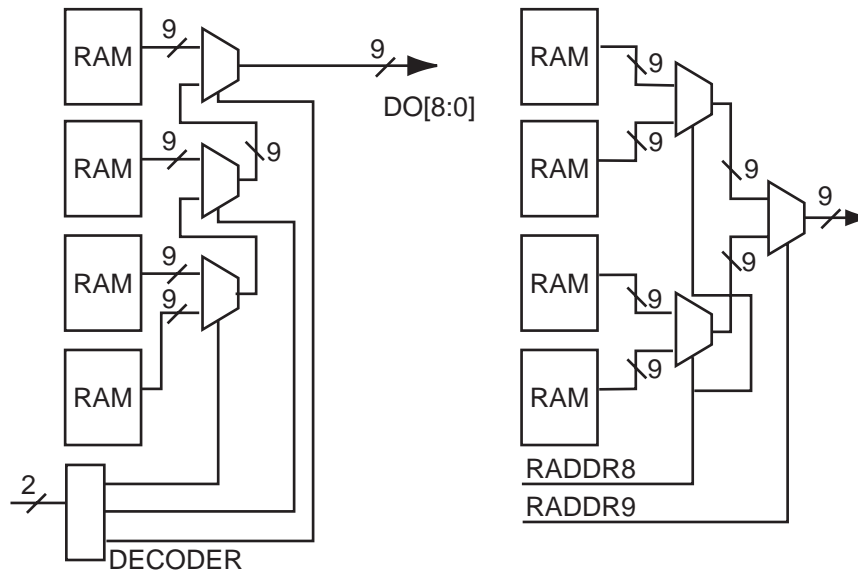

**Figure 5 • How to Connect a DMUX Cell Select Pin**

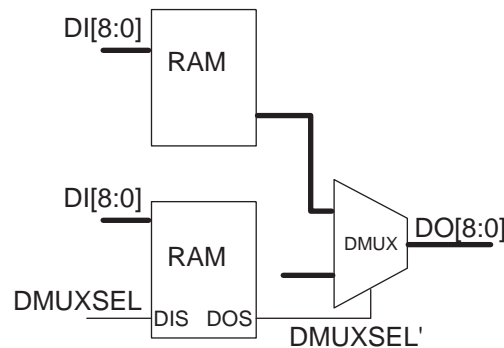


**Figure 6 • Deep RAM Block Diagram**




## Deep FIFOs

Deep FIFOs are slightly more difficult to build than deep RAMs. This is because of the missing address signals. There has to be a block select generated internally for both the read and the write cycle. To guarantee proper functionality, the FIFOs have to be filled up equally. That means that the block select for the read cycle is shifted with every read access from one FIFO to the next. The write block select is shifted with every write cycle. Two shift registers are needed to build this functionality. The shift registers are

reset with the 'RESET' signal. It is essential that both shift registers start with the same output vector. The use of the DMUX cells is the same as in the design with the deep RAMs, therefore we get a basic block diagram for deep FIFOs as shown in [Figure 8](#). An 'EMPTY' signal or a 'FULL' signal is generated for the deep FIFO if all FIFO blocks are full or empty. These signals have to be connected to an AND gate to generate the right functionality.

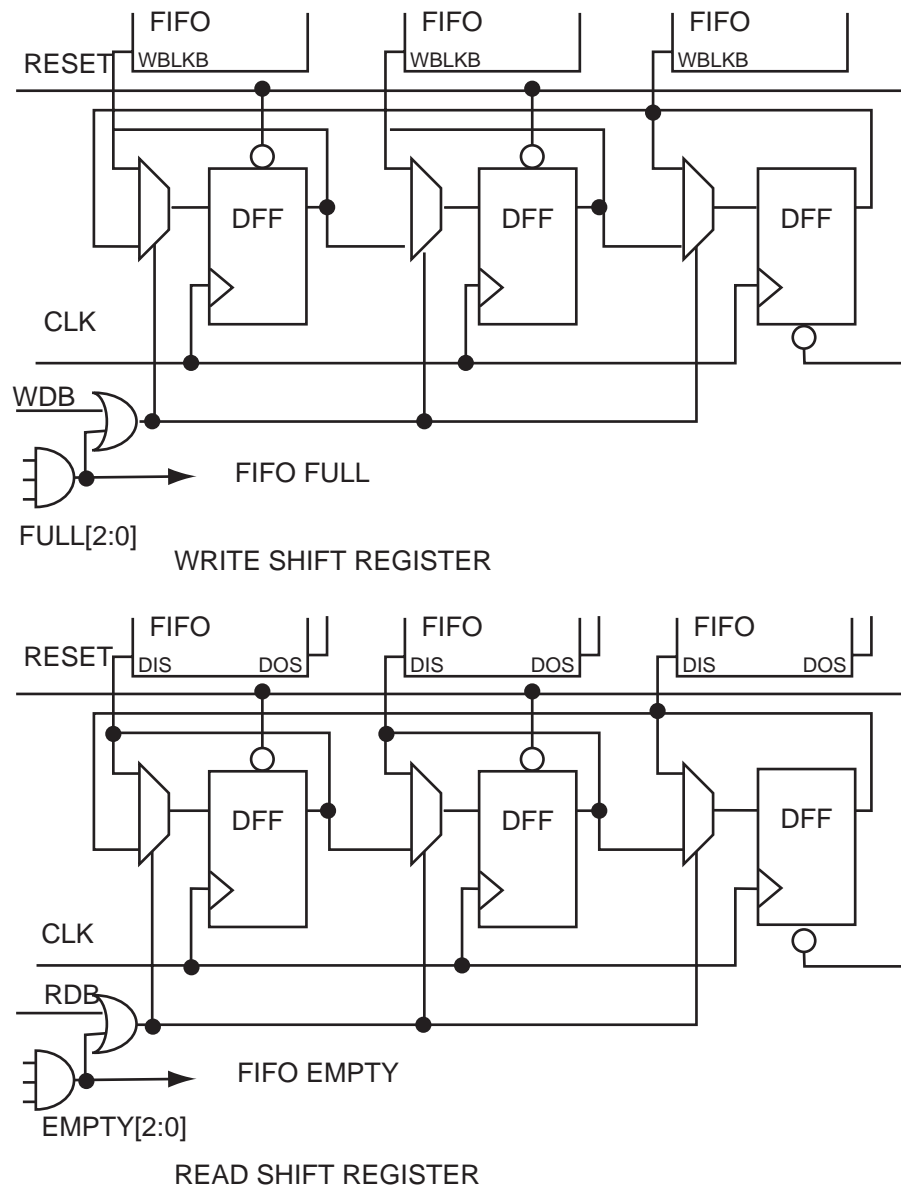

**Figure 7 • Examples for Internal Shift Registers for Deep FIFOs**

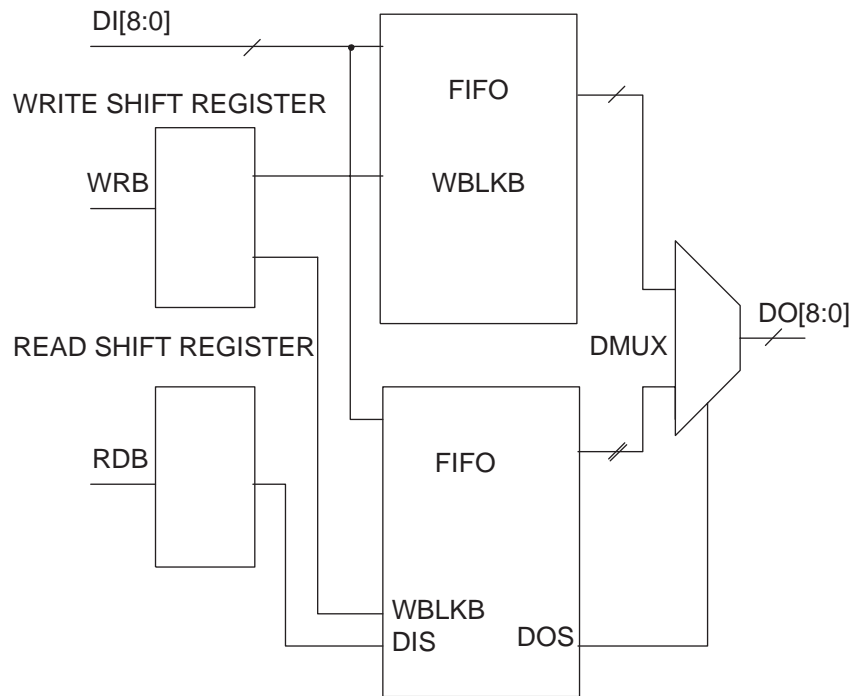

**Figure 8 • Example of a Deep FIFO Block Diagram**

### Conclusion

The ProASIC<sup>PLUS</sup> family of FPGAs provides very flexible memory blocks that can be implemented very quickly in any design. ACTgen generates and cascades memory blocks and defines the necessary RAM and FIFO logic. Actel recommends that users generate macros using the ACTgen Macro Builder to facilitate this process.

Actel and the Actel logo are registered trademarks of Actel Corporation.  
All other trademarks are the property of their owners.



<http://www.actel.com>

**Actel Corporation**

955 East Arques Avenue  
Sunnyvale, California 94086  
USA

**Tel:** (408) 739-1010

**Fax:** (408) 739-1540

**Actel Europe Ltd.**

Dunlop House, Riverside Way  
Camberley, Surrey GU15 3YL  
United Kingdom

**Tel:** +44 (0)1276 401450

**Fax:** +44 (0)1276 401490

**Actel Japan**

EXOS Ebisu Bldg. 4F  
1-24-14 Ebisu Shibuya-ku  
Tokyo 150 Japan

**Tel:** +81 03-3445-7671

**Fax:** +81 03-3445-7668

**Actel Hong Kong**

39th Floor  
One Pacific Place  
88 Queensway  
Admiralty, Hong Kong  
Tel: 852-22735712