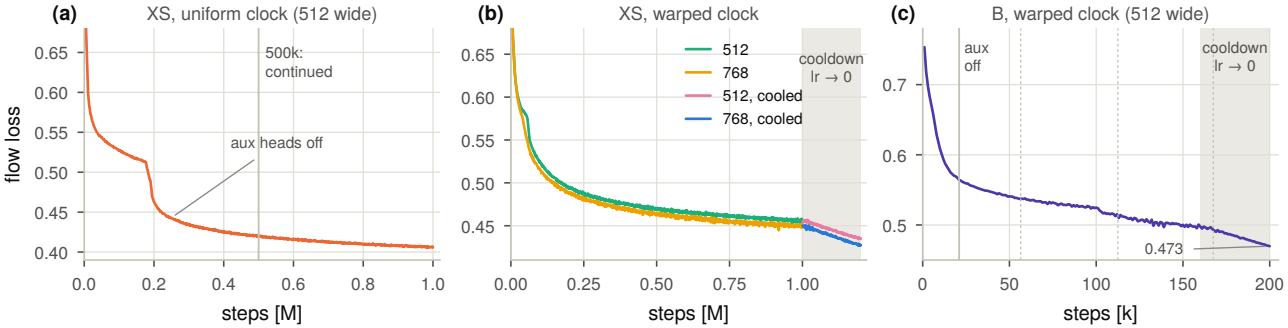
(a)
XS, uniform clock (512 wide)
500k:
continued
aux heads off
flow loss
steps [M]
(b)
XS, warped clock
512
768
512, cooled
768, cooled
cooldown
lr → 0
steps [M]
(c)
B, warped clock (512 wide)
aux
off
cooldown
lr → 0
0.473
steps [k]