




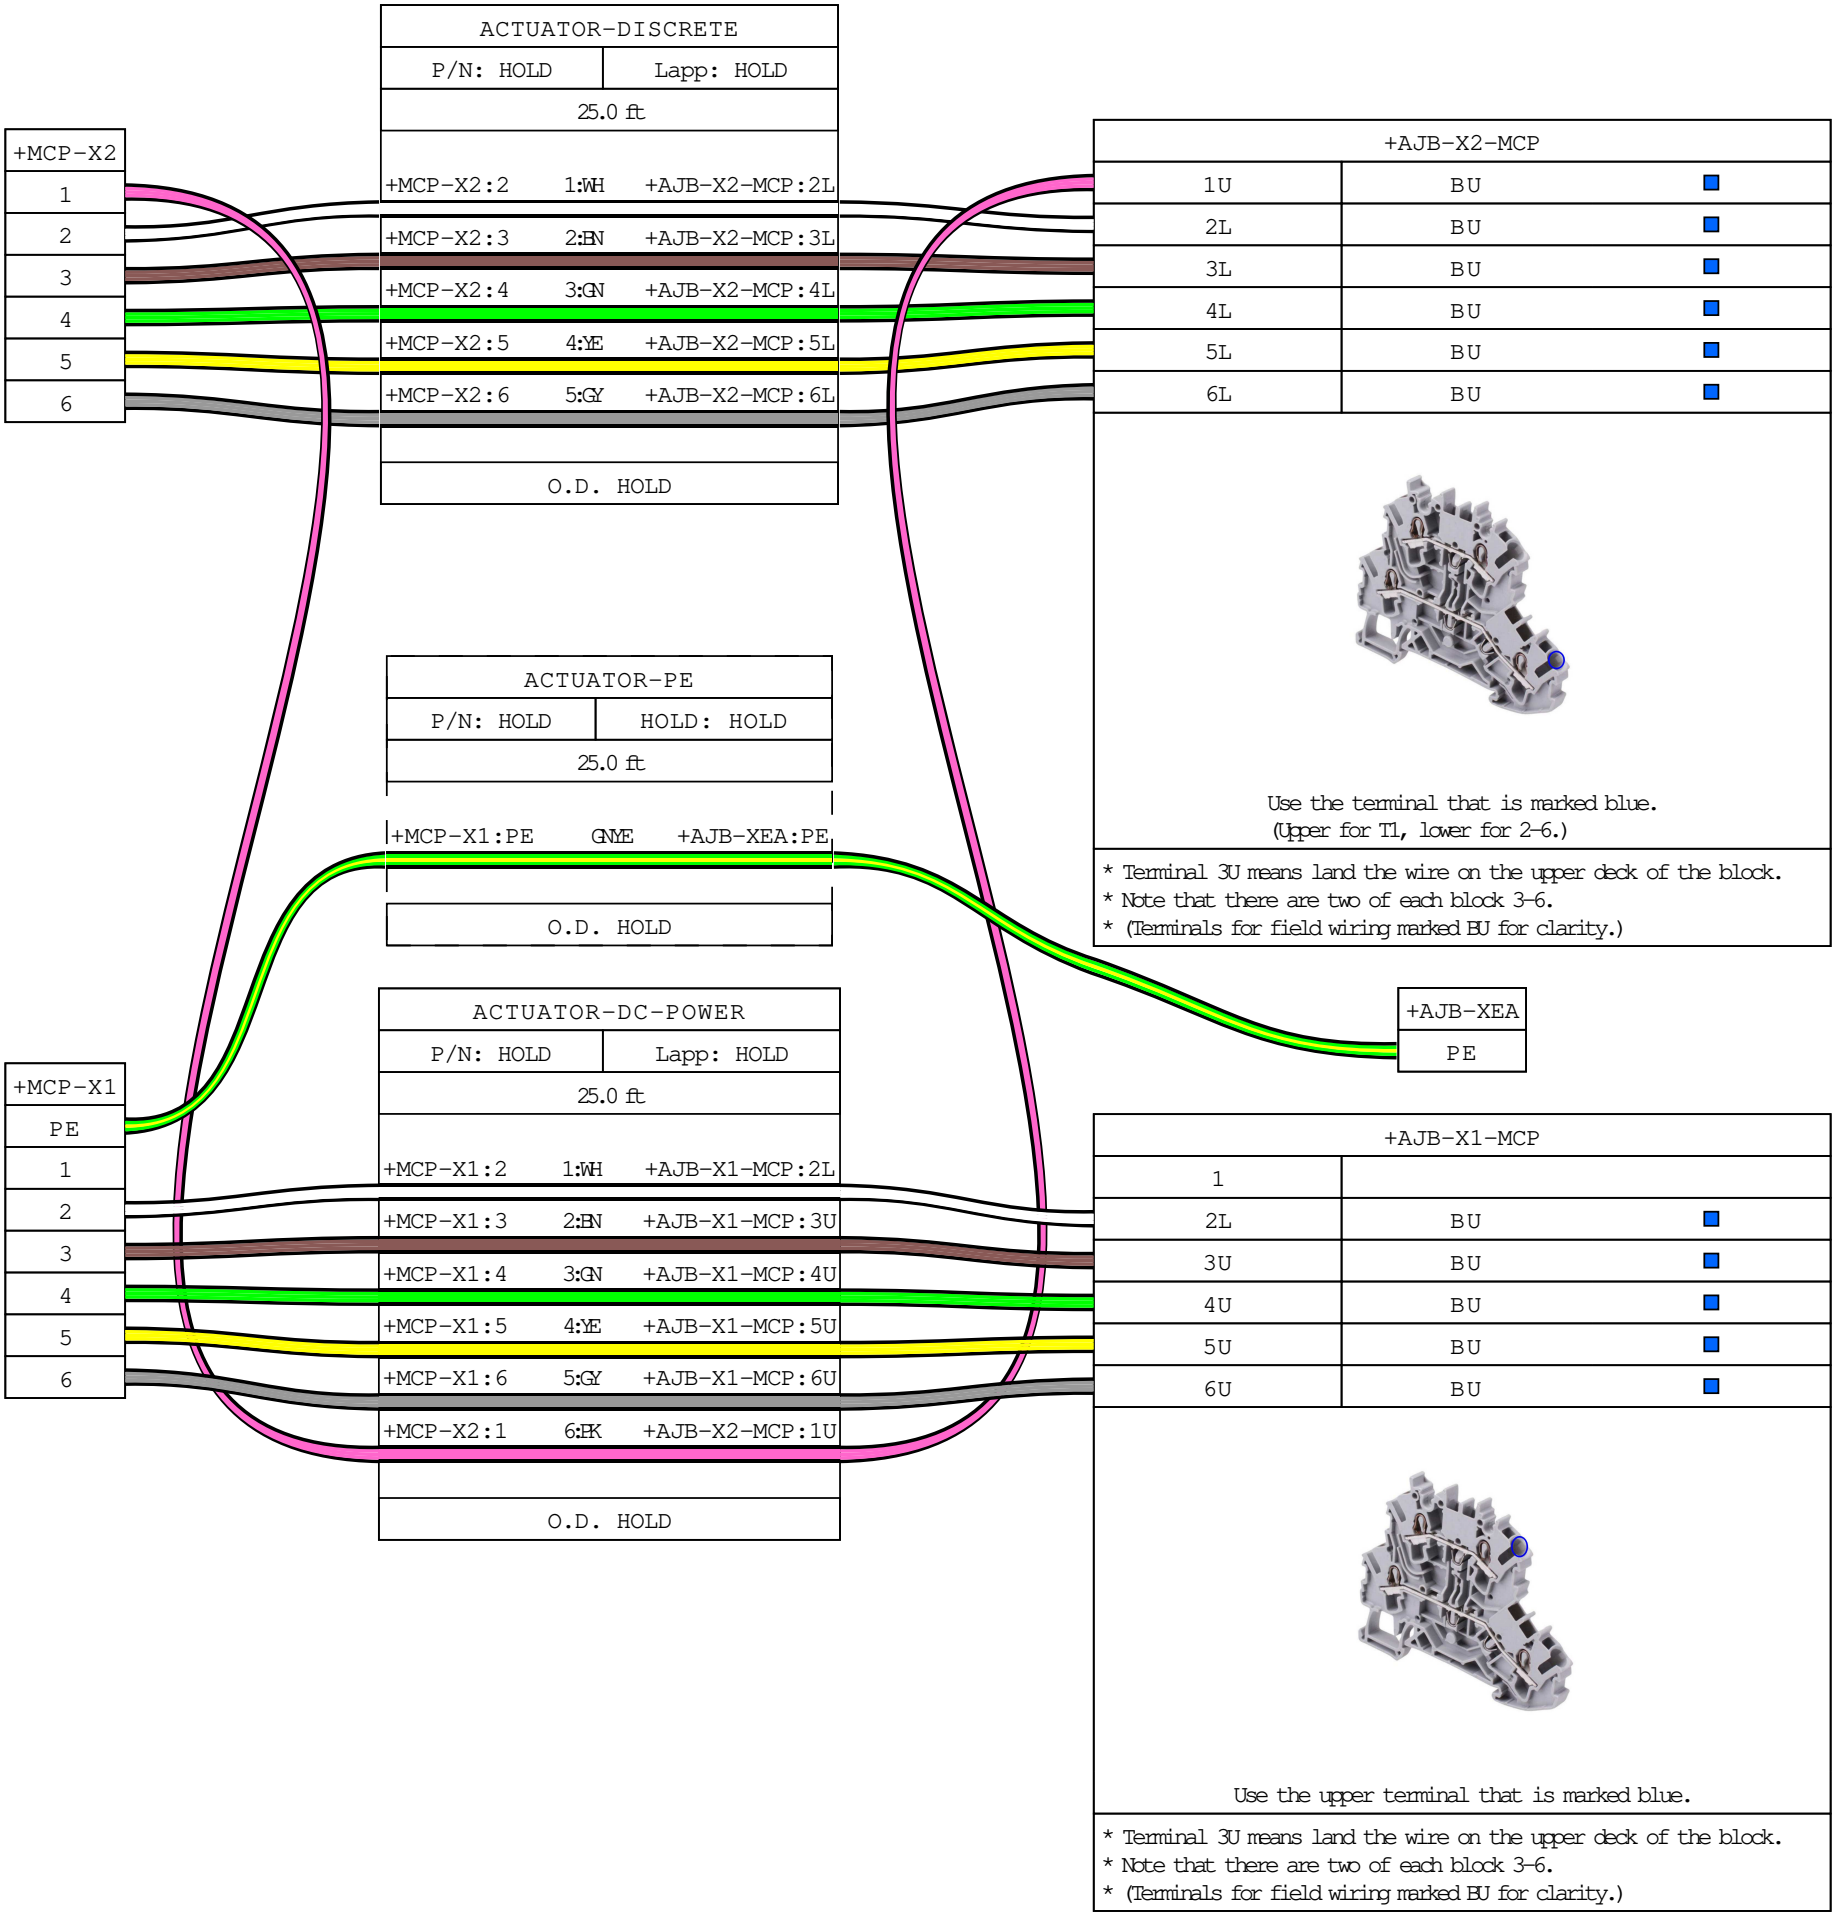

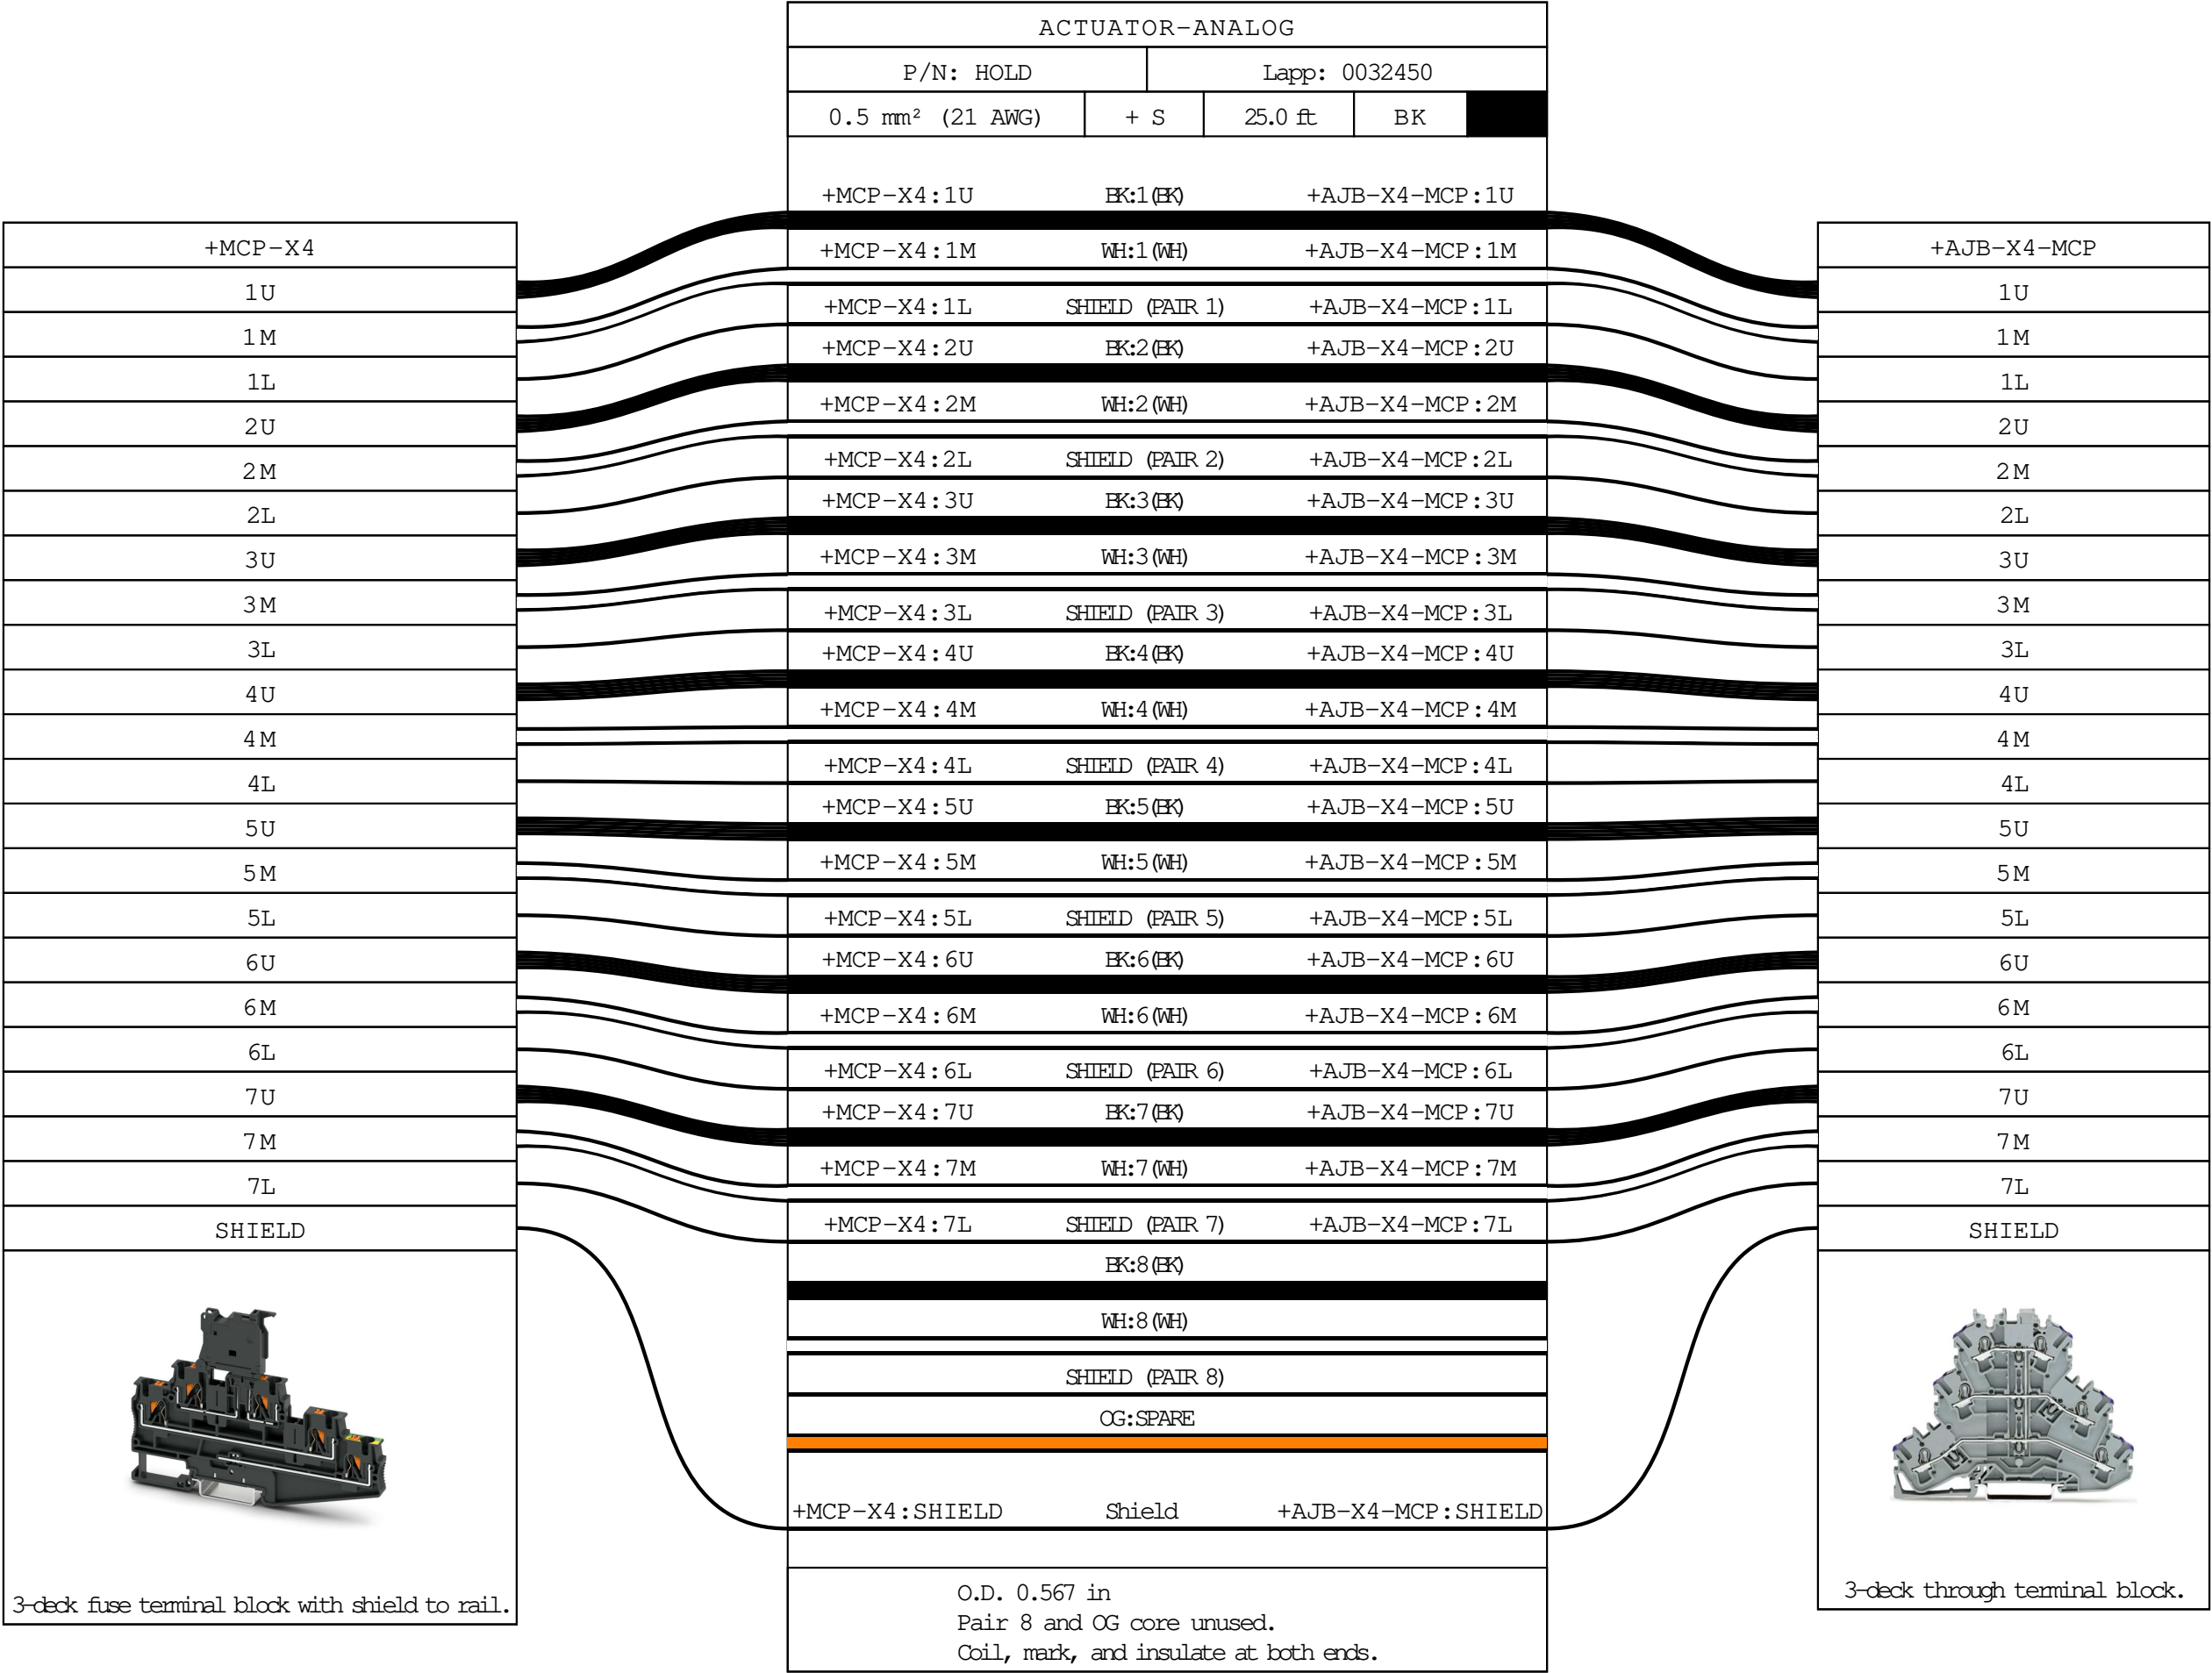

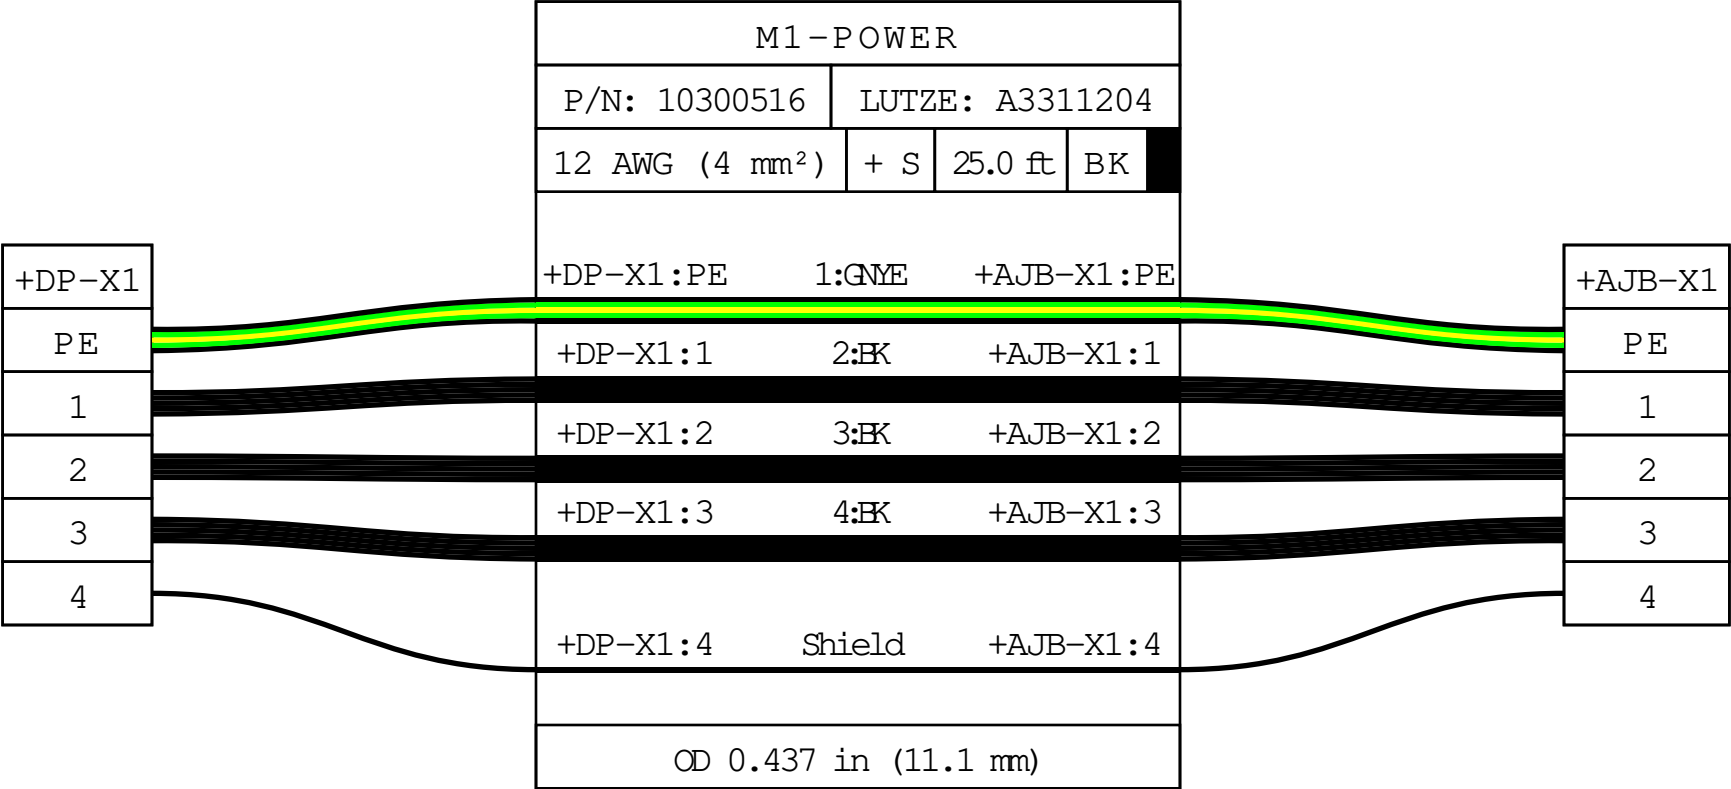


+MCP-XESD
1
2


ESD-STATUS				
P/N: HOLD		Lapp: 1030279		
1 mm ² (18 AWG)		25.0 ft	BK	
+MCP-XESD:1 1:WH +AJB-XESD:1L				
+MCP-XESD:2 2:BN +AJB-XESD:2L				
O.D. 0.22 in				


+AJB-XESD	
1L	1L
1U	1U
2L	2L
2U	2U
Upper terminals for solenoid connections.	


SIS-ESD		
By others		
+AJB-XESD:1L	BK	+SIS-XESD:+
+AJB-XESD:2L	WH	+SIS-XESD:-


+SIS-XESD
By others
+
-
48 VDC ESD Power

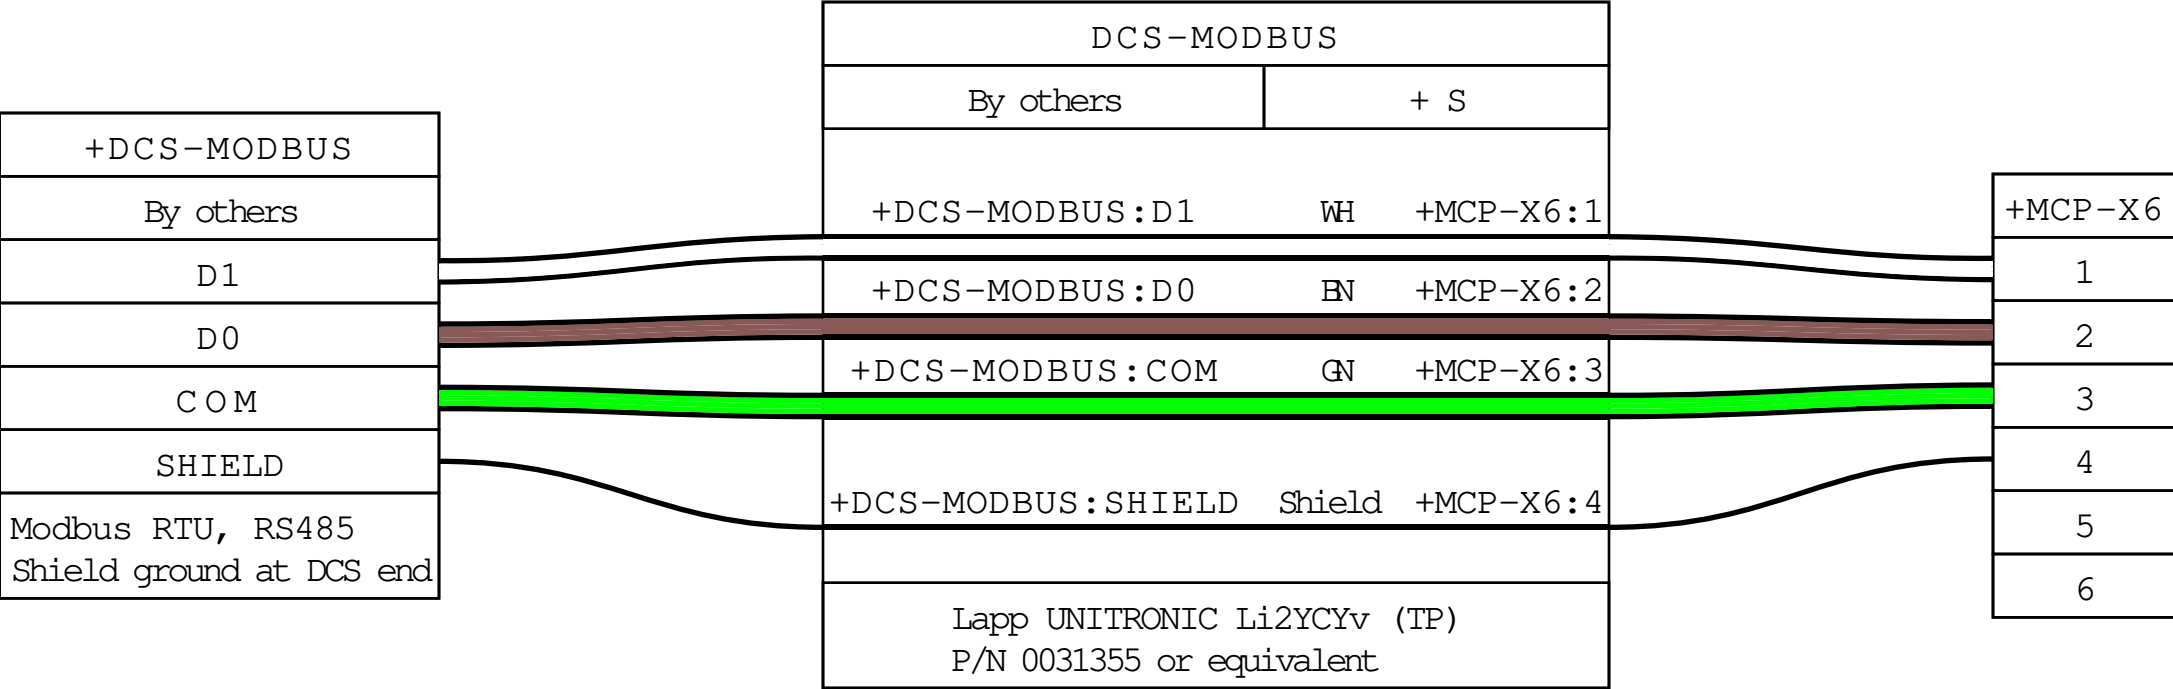

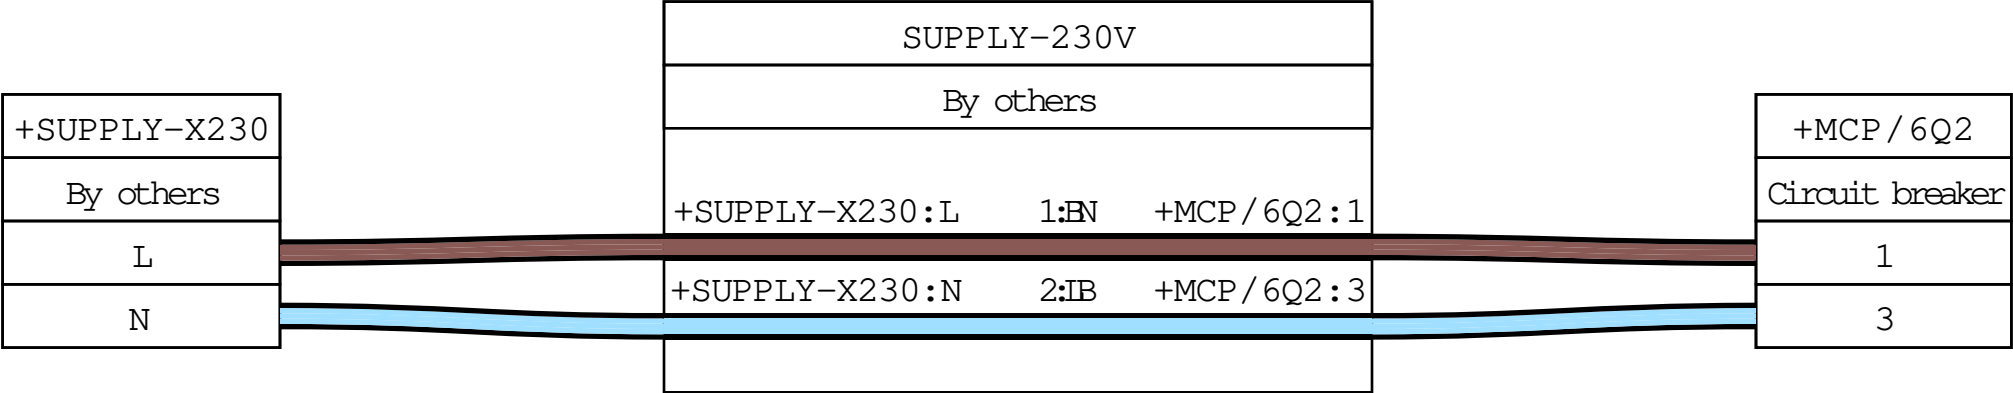

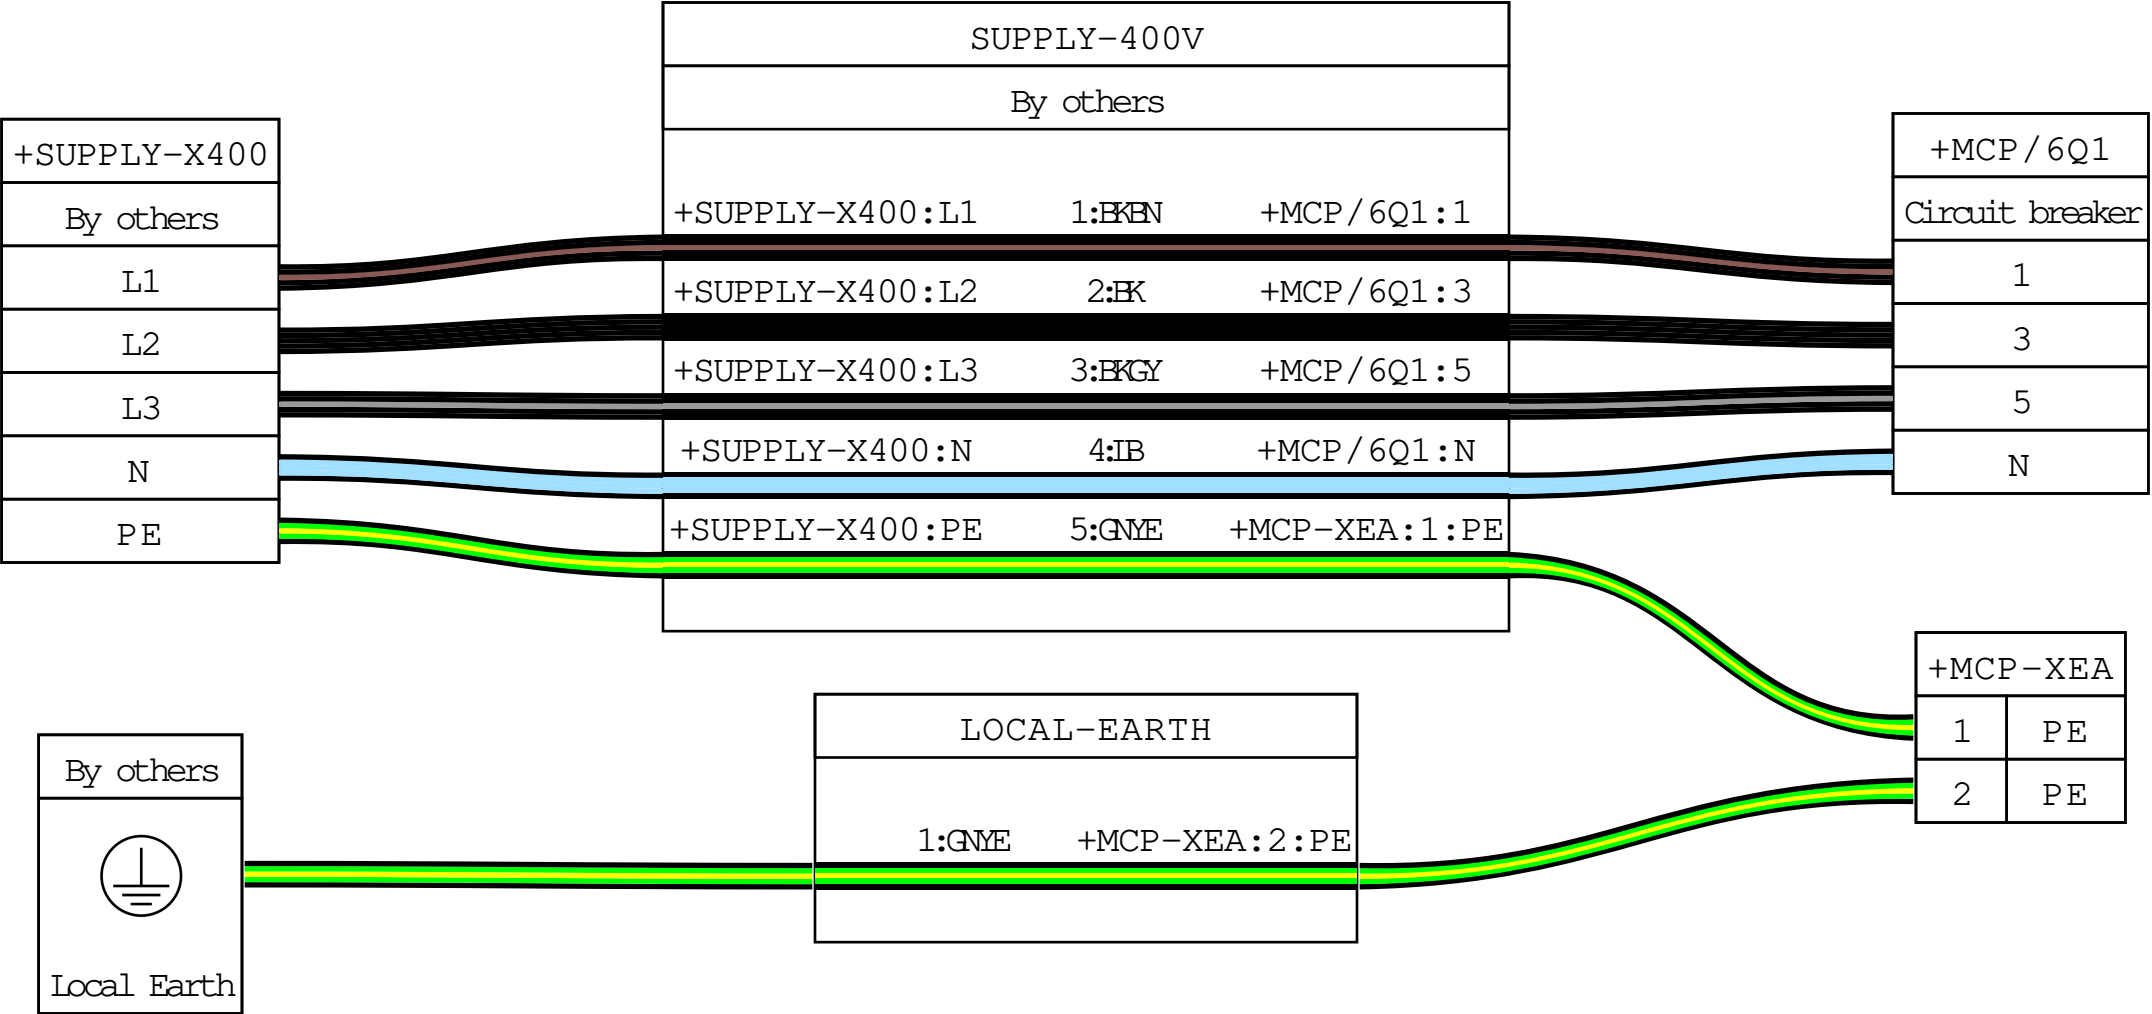

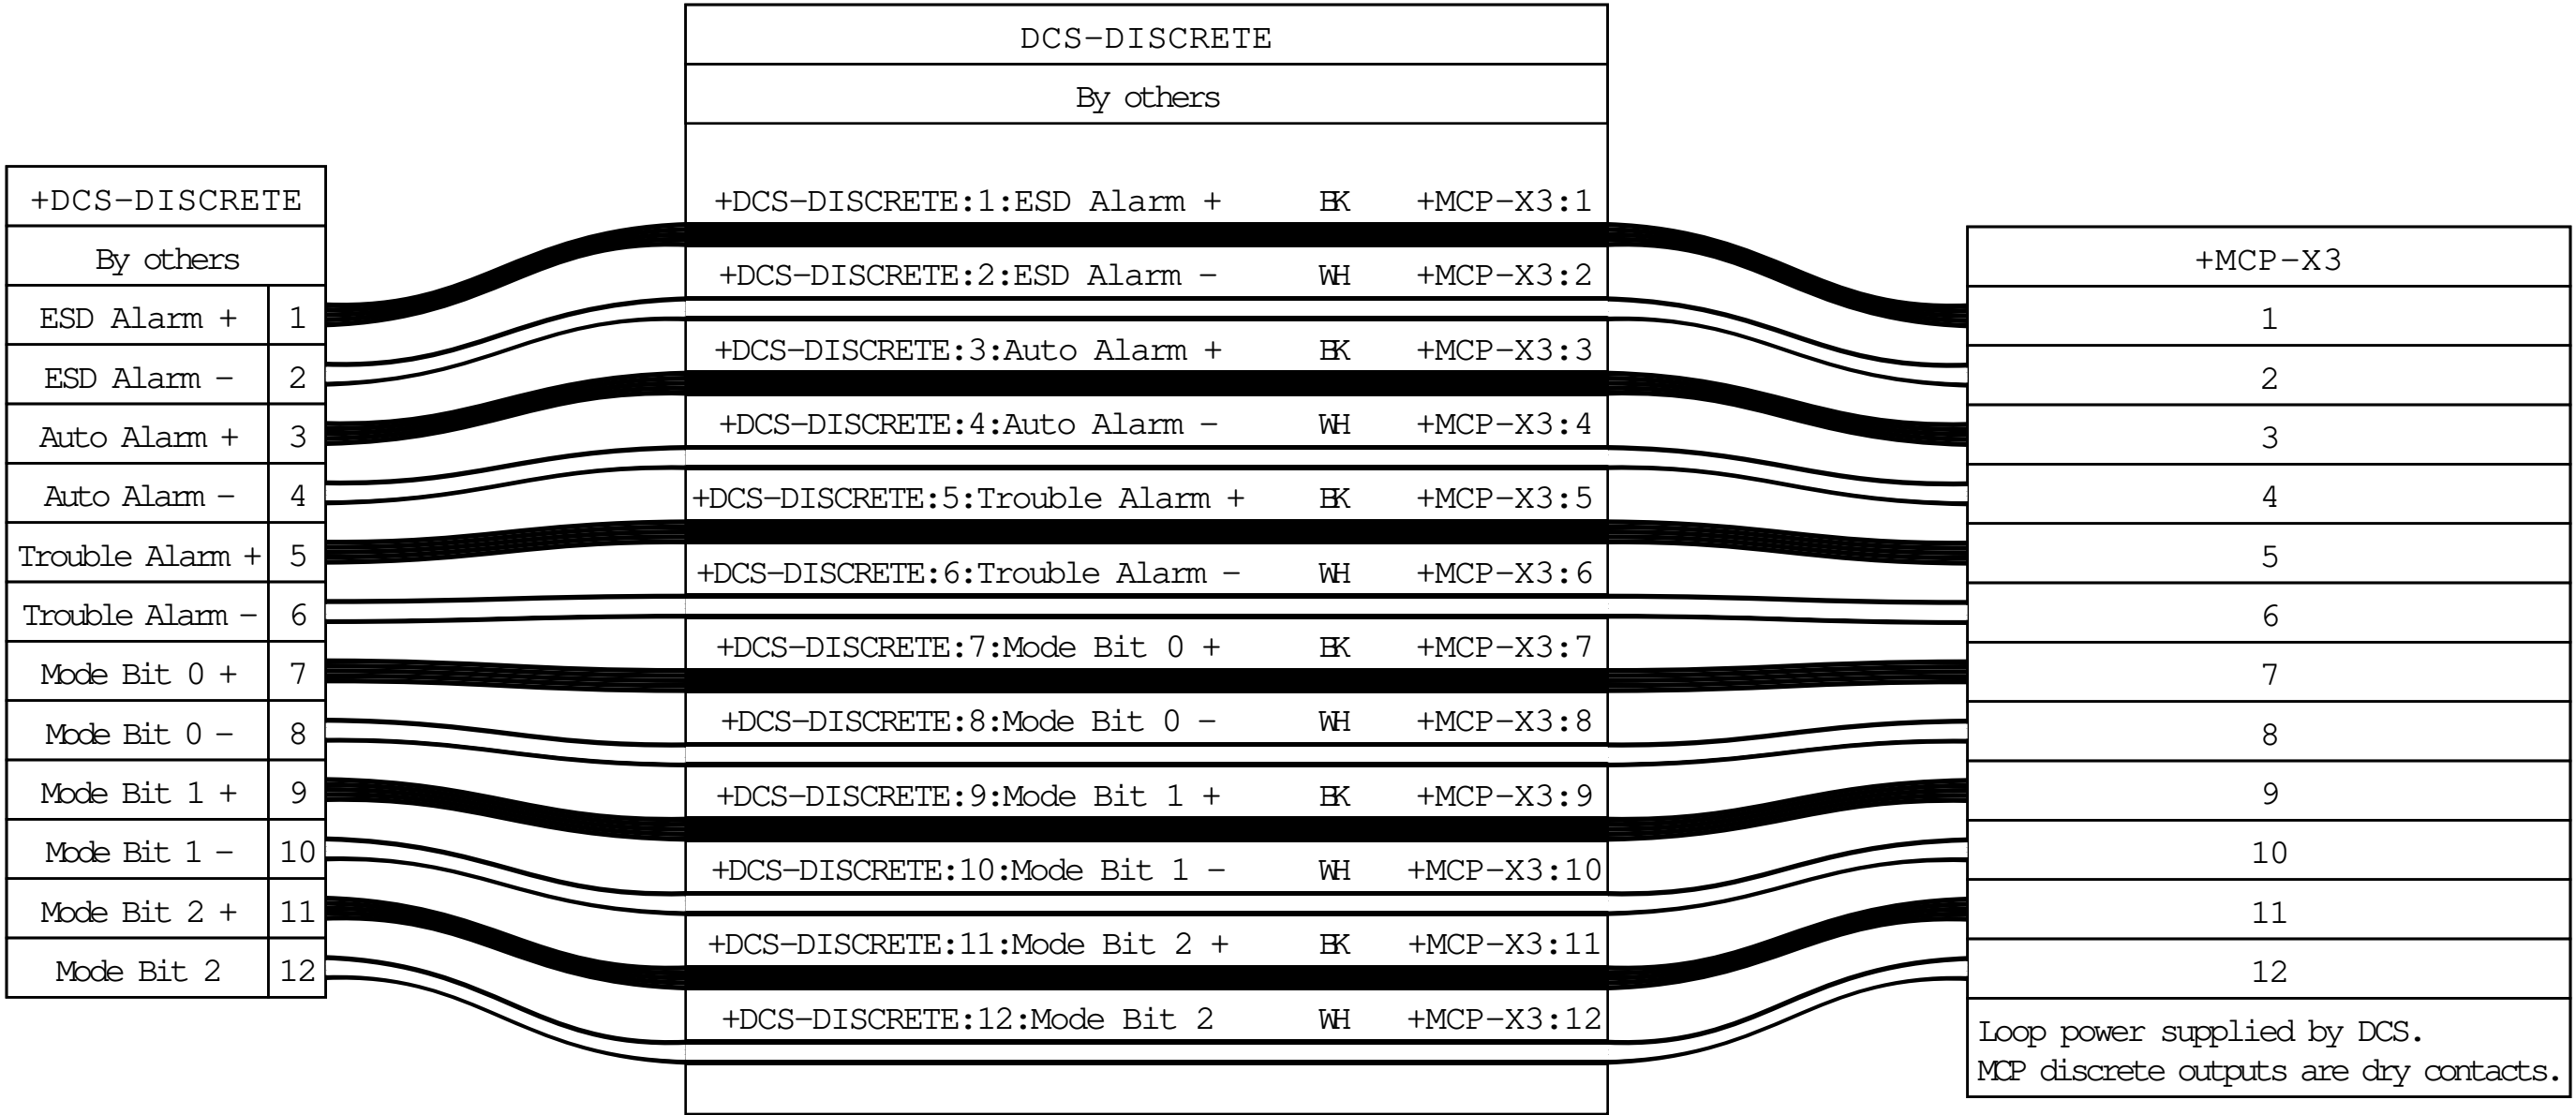

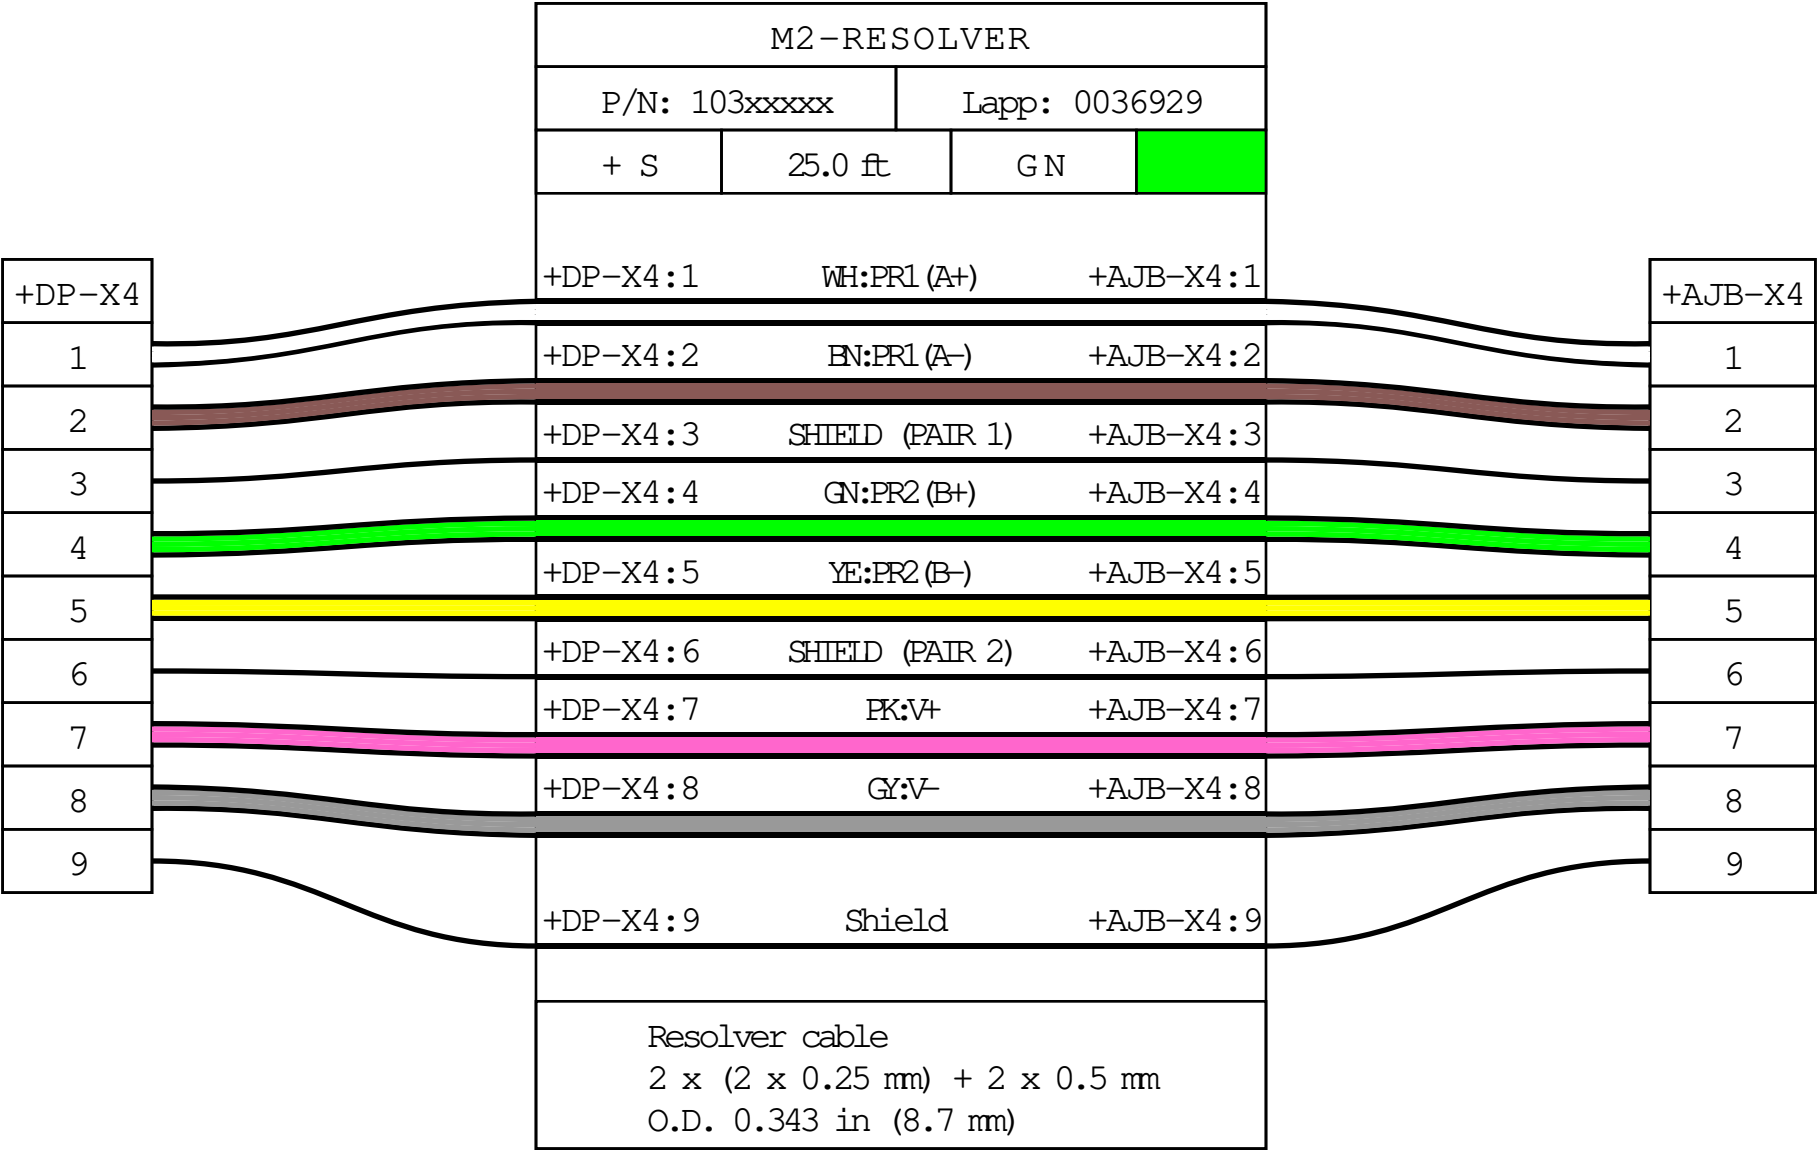


+DCS-ANALOG	
By others	
ZC +	1
ZC -	2
SHIELD	3
ZI +	4
ZC -	5
SHIELD	6
PT ACC +	7
PT ACC -	8
SHIELD	9
PT A +	10
PT A -	11
SHIELD	12
PT B +	13
PT B -	14
SHIELD	15

DCS-ANALOG		
By others		+ S
+DCS-ANALOG:1:ZC +	EK:1(EK)	+MCP-X5 (T1) :1U
+DCS-ANALOG:2:ZC -	WH:1(WH)	+MCP-X5 (T1) :1M
+DCS-ANALOG:3:SHIELD	SHIELD (PAIR 1)	+MCP-X5 (T1) :1L
+DCS-ANALOG:4:ZI +	EK:2(EK)	+MCP-X5 (T2-T5) :2U
+DCS-ANALOG:5:ZC -	WH:2(WH)	+MCP-X5 (T2-T5) :2M
+DCS-ANALOG:6:SHIELD	SHIELD (PAIR 2)	+MCP-X5 (T2-T5) :2L
+DCS-ANALOG:7:PT ACC +	EK:3(EK)	+MCP-X5 (T2-T5) :3U
+DCS-ANALOG:8:PT ACC -	WH:3(WH)	+MCP-X5 (T2-T5) :3M
+DCS-ANALOG:9:SHIELD	SHIELD (PAIR 3)	+MCP-X5 (T2-T5) :3L
+DCS-ANALOG:10:PT A +	EK:4(EK)	+MCP-X5 (T2-T5) :4U
+DCS-ANALOG:11:PT A -	WH:4(WH)	+MCP-X5 (T2-T5) :4M
+DCS-ANALOG:12:SHIELD	SHIELD (PAIR 4)	+MCP-X5 (T2-T5) :4L
+DCS-ANALOG:13:PT B +	EK:5(EK)	+MCP-X5 (T2-T5) :5U
+DCS-ANALOG:14:PT B -	WH:5(WH)	+MCP-X5 (T2-T5) :5M
+DCS-ANALOG:15:SHIELD	SHIELD (PAIR 5)	+MCP-X5 (T2-T5) :5L
Shield		

+MCP-X5 (T1)
1 U
1 M
1 L

3-deck fuse terminal block with shield to rail.
Loop power supplied by MCP power supply unit.

+MCP-X5 (T2-T5)
2 U
2 M
2 L
3 U
3 M
3 L
4 U
4 M
4 L
5 U
5 M
5 L

3-deck knife disconnect terminal block with shield to rail.
Loop power supplied by MCP signal isolator.

