

Pipe clamps



Commonly used in woodworking applications for edge gluing of multiple pieces. The versatility of the reach comes from the ability to use a variety of lengths of pipe to suit your needs.

1 Foot assembly

Foot assembly stabilizes clamp.

2 Extra high base

Extra high base provides finger-saving clearance from the work surface.


3 Cast jaws

Cast jaws for durability.

4 Smooth spindle with Hex head*

Smooth action spindle. Hex head on PC-2 model

* Hex head spindle is to facilitate clamping, not augment it.
Applying too much clamping force may cause the fixture to fail.

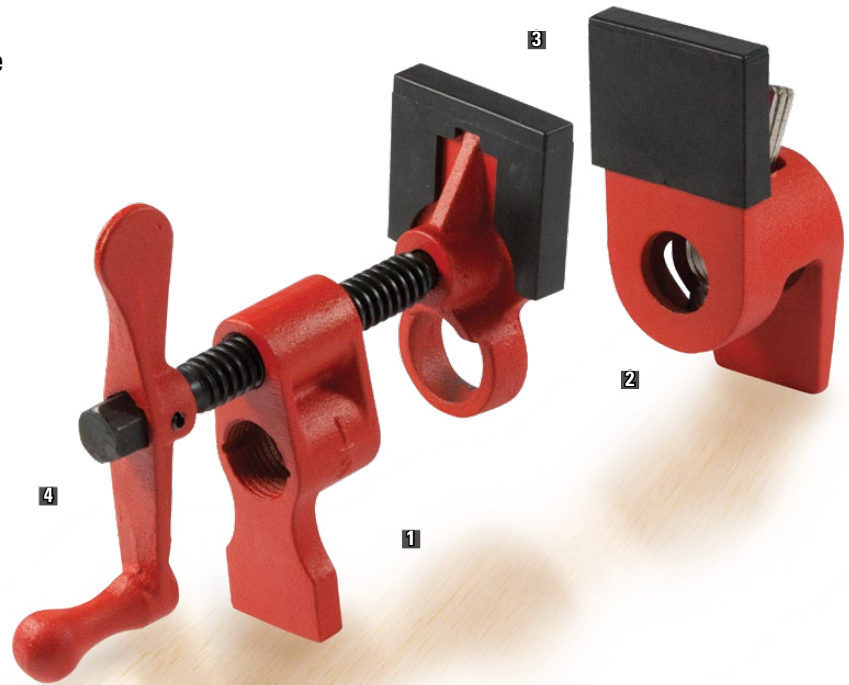

Pipe clamp, traditional style, PC-2

Large clamping surface. ACME threaded screw. Hex head on spindle. High base improves clearance from the work surface. An economical alternative to the bar clamp.

	Black Pipe Diameter	Throat Depth	Approx. Weight
PC34-2	3/4"	2 3/8"	2.74 lbs
PC12-2	1/2"	2 1/8"	2.02 lbs

Replacement pad sets: PC34-2-PADS, PC12-2-PADS



Pipe clamp, H style, BPC

"H" shape foot assembly stabilizes clamp in two dimensions giving dual-axis stability. Extra high base offers clearance between the handle and work surface.

	Black Pipe Diameter	Throat Depth	Approx. Weight
BPC-H34	3/4"	2 1/8"	2.88 lbs
BPC-H12	1/2"	1 1/2"	1.83 lbs

Replacement pad sets: BPC-H34-PADS and BPC-H12-PADS



Deep reach pipe clamp, traditional style, PC-DR

The traditional pipe clamp features ACME threaded spindle and some extra deep reach!

	Black Pipe Diameter	Throat Depth	Approx. Weight
PC-34DR	3/4"	2 1/2"	2.15 lbs

Replacement pad sets: PC-34DR-PADS

