

The above parts are chopped into segments on the pages below.

2025 DM




Superstrut®

Channel, slotted angle and concrete inserts

Steel channels


GoldGalv® finish $\frac{7}{8}$ ", continuous slot and 10' and 20' lengths.
Also available in pre-galvanized, green, hot dipped, galvanized, stainless steel and PVC coated.



A-1200 (12 ga.)
A-1400 (14 ga.)




B-1200 (12 ga.)
B-1400 (14 ga.)



C-1200




E-1200




H-1200

Hole configurations

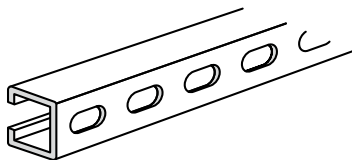


Half slot channel (HS)

Cat. no.	Size (in.)
$\frac{3}{16}$" x $1\frac{1}{8}$" slot on 2" centers	
A-1200-HS	$1\frac{1}{8}$ x $1\frac{1}{8}$
B-1200-HS	$1\frac{1}{8}$ x $1\frac{3}{16}$
C-1200-HS	$1\frac{1}{8}$ x $1\frac{1}{8}$
E-1200-HS	$1\frac{1}{8}$ x $2\frac{7}{16}$
H-1200-HS	$1\frac{1}{8}$ x $3\frac{1}{4}$
A-1400-HS	$1\frac{1}{8}$ x $1\frac{1}{8}$
B-1400-HS	$1\frac{1}{8}$ x $1\frac{3}{16}$




Channel with knockouts (KO)

Cat. no.	Size (in.)
KO for $\frac{1}{2}$" conduit	
A-1200-KO	$1\frac{1}{8}$ x $1\frac{1}{8}$
A-1400-KO	$1\frac{1}{8}$ x $1\frac{1}{8}$



Slotted channel (S)


Cat. no.	Size (in.)
$\frac{3}{16}$" x 3" slots on 4" centers	
A-1200-S	$1\frac{1}{8}$ x $1\frac{1}{8}$
B-1200-S	$1\frac{1}{8}$ x $1\frac{3}{16}$
A-1400-S	$1\frac{1}{8}$ x $1\frac{1}{8}$
B-1400-S	$1\frac{1}{8}$ x $1\frac{3}{16}$



Punched channel (P)


Cat. no.	Size (in.)
$\frac{3}{16}$" holes on $1\frac{1}{8}$" centers	
A-1200-P	$1\frac{1}{8}$ x $1\frac{1}{8}$
B-1200-P	$1\frac{1}{8}$ x $1\frac{3}{16}$
H-1200-P	$1\frac{1}{8}$ x $3\frac{1}{4}$
A-1400-P	$1\frac{1}{8}$ x $1\frac{1}{8}$
B-1400-P	$1\frac{1}{8}$ x $1\frac{3}{16}$

Stainless steel/special metals



Stainless steel channel suffix SS or SS6 — type 304 and type 316

Cat. no.	Size (in.)
Available in 10' and 20' lengths	
A-1200-SS	$1\frac{1}{8}$ x $1\frac{1}{8}$ x 13 gauge
A-1200-HS-SS	$1\frac{1}{8}$ x $1\frac{1}{8}$ x 13 gauge




Aluminum channel

Cat. no.	Size (in.)
Available in 10' and 20' lengths	
A-1200-AL	$1\frac{1}{8}$ x $1\frac{1}{8}$ x 13 gauge
A-1200-HS-AL	$1\frac{1}{8}$ x $1\frac{1}{8}$ x 13 gauge
A-1202-AL	$1\frac{1}{8}$ x $3\frac{1}{4}$ x 14 gauge
B-1200-AL	$1\frac{1}{8}$ x $1\frac{3}{16}$ x 14 gauge
B-1202-AL	$1\frac{1}{8}$ x $1\frac{1}{8}$ x 14 gauge




Combination channel

A series section (also available in B, E, H and C series sections.)

- For 1 1/2" channel
- Solid base
- Available in HS holes



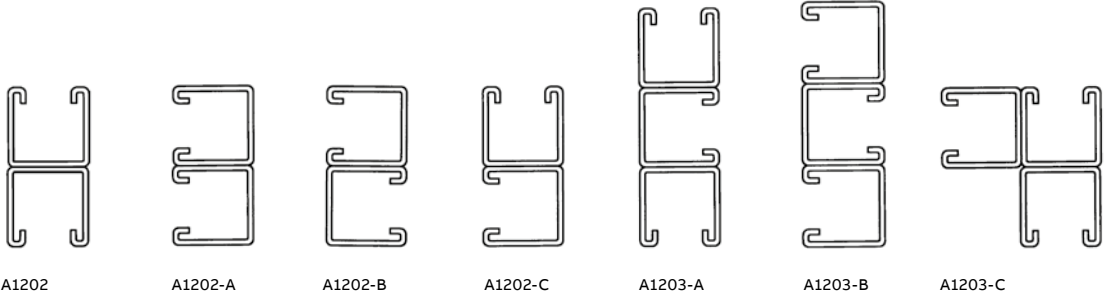


Concrete inserts/slotted angle




Type RA-160
Slotted angle

Cat. no.	Length (ft.)
1 1/2" x 1 1/2" x 0.080 (14 gauge)	
RA-160-10	10
RA-160-12	12

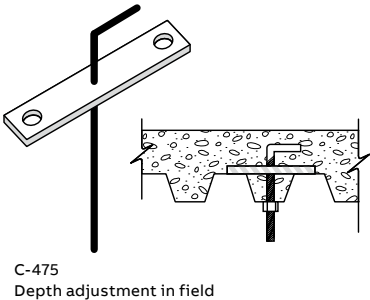

Type RA-225
Slotted angle heavy duty


Cat. no.	Length (ft.)
2 1/2" x 1 1/2" x 0.080 (14 gauge)	
RA-225-10	10
RA-225-12	12




RA-RC
Rigid center



RA-SC
Swivel caster
Rigid and swivel caster




RAC
Portable cutter




Type RA-300
Slotted angle extra heavy duty

Cat. no.	Length (ft.)
3 1/2" x 1 1/2" x 0.104 (12 gauge)	
RA-300-10	10
RA-300-12	12


Beam clamps and hanger supports




500 series
beam clamp



EC clamp
malleable iron




RC clamp
malleable iron
RCS clamp steel




PC clamp
malleable iron




U-571, U-572
conduit clamp




U-560
Heavy-duty beam clamp
set screw included




U-562
Beam clamp




U-563
Beam clamp




U-564
Wide-mouthed heavy
duty beam clamp




U-543
Adjusting screw end caps




U-568
Beam clamp safety strap




US-563
Beam clamp with
swing hanger




US-562
Beam clamp with
swing hanger




U-577
Clevis and swing connector




S-541
Swing connector



A-597
Channel support
beam clamp




U-569
Beam clamp



A-570
Beam clamp with safety rod




C-775L
Clamp with lock nut




C-780 W/O HDW
Welded beam attachment
without hardware




M-775L
Clamp with lock nut




C-777
Steel top beam clamp
with lock nut




C-778
Steel wide jaw top beam
clamp with lock nut




M-777
Junior top beam C-clamp




M-778
Top beam C-clamp




U-510
Channel support
beam clamp




M-750
Side beam bracket




540
Side beam hanger clip




542
Side beam hanger clip




U-514-A
Channel support
beam clamp




U-501, U-502
Channel support
I-beam clamp




U-514
Channel support
beam clamp




512
Channel support
beam clamp




U-504
Channel support
I-beam clamp




U-505
Channel support
I-beam clamp



U-520
Series channel support
beam clamp




U-515
Channel support
beam clamp




U-515-B
Channel support
beam clamp


Conduit and pipe hangers




700
Thin wall conduit clamp




701
OD tubing pipe clamp




702
Pipe and rigid or IMC
conduit clamp




703
Universal clamp




C-781
Mechanical I-beam washer




Cushioned pipe
A-716 Tube series
P-716 Pipe series




U-716, U-717
Cushioned pipe strap
omega series




S-716
Cush-A-strip



C-105
Pipe and rigid or IMC
conduit clamp




C-108
Universal pipe strap




6H Series
Conduit and pipe hanger — standard finish SilverGalv




6H-B Series




6H-TB Threaded
series




6H-T Threaded
series



C-708-U
Short strap for channel
or wall mounting
carbon steel




C-710
Adjustable
clevis hanger




C-711
J pipe hanger




C-727
Adjustable ring
standard/NFPA




C-725
Medium pipe clamp




C-720
Riser clamp



M-742-R
Ceiling flange



C-728



C-728-H



CL-710
Light-duty
clevis hanger

Available finishes and materials

GoldGalv®

The standard Superstrut GoldGalv finish involves a multi-step electrogalvanizing and zinc trivalent chromium process. The trivalent chromium finish is applied over the zinc, producing a chemically bonded non-porous barrier for protection from moisture and air. The 0.5 mil electro-plated zinc and gold trivalent chromium finish provides all of the features and protection of hexavalent chromium without the use of that chemical and is RoHS compliant.

SilverGalv® (suffix EG)

The Superstrut SilverGalv finish is a post-fabrication, 12-step electrogalvanizing process that applies a clear conversion coat over 0.5 mils of zinc. This is identical to the process used in the Goldgalv finish without the gold-colored trivalent chromium conversion coat. The SilverGalv electrogalvanizing process provides a strong, cohesive molecular bond that locks out moisture and provides far superior corrosion resistance over standard G90 pregalvanized channel. The result is an abrasion-resistant protective finish that won't form white rust.

Pregalvanized (suffix PG)

A zinc coating is applied by hot dipping the steel coil at the mill before fabrication. After the material is worked by roll-forming, cutting or punching, minimal protection is provided for raw edges. This weakness is typical with precoated material and affects the channel section around holes, extreme ends and the edges of the U-shaped lips. Superstrut pregalvanized material conforms to ASTM A-525/G-90, representing 0.9 oz. of zinc per square foot of steel. This finish is often referred to as hot-dipped mill galvanized or mill galvanized.

Hot-dipped galvanized (suffix HDG)

The material is zinc coated after fabrication, providing total protection on all surfaces. The fabricated component is dipped into hot zinc for a prolonged period, creating a coherent bond for better corrosion resistance than pregalvanizing. Hot-dipped galvanizing is not recommended for threaded products, because the thickness of the zinc may disrupt the threads. Superstrut hot-dipped galvanized material conforms to ASTM A-123 and A-153, maintaining a minimum 1.5 oz. of zinc per square foot of steel or 2.5 mils. This finish is also referred to as hot-dipped galvanized after fabrication.


Stainless steel — type 304 (suffix SS) and type 316 (suffix SS6)

Superstrut channel and most accessories are available in type 304 stainless steel material. Channel and many accessories are also available in type 316 stainless steel for superior corrosion resistance.


Other available finishes and materials

Superstrut channel and accessories are also available in the following finishes and materials: green or white urethane powder coated (suffix GR or WH), PVC coated (suffix PVC), copper plated (T inserted as second digit of catalog number), black (suffix B) and aluminum (suffix AL).


Channel nuts




UCN
Universal cone nut



A-100
Regular spring nut




B-100
Short spring nut




AB-100
Springless nut

Seismic bracing




ES-142-1/2x1 1/2
Seismic bracing rod
stiffener connector




C-749-N-7/8
Seismic brace




S-720
Adjustable pipe hanger



C-749-N
Standard
seismic brace




C-749-N-5/8
Standard
seismic brace




C-749-N-1-1/8
Standard
seismic brace


Channel fittings




AB201




AB203




AB205




AB213




AB214




A-209
For attaching
A series channel




AB274




X-204




X-289




AB-254




AB207




B-209
For attaching
B series channel




AB-263




AB-220




A217




AW220




AP-235




AP-235SQ




AP-232




AP-232SQ




AB-219




AB-253




AW-224




A-210




A-211




A-212




A-208
For attaching
A series channel




A-802
Furnished complete
with nuts




A822
Furnished with hardware



AB-227



AB-225




AB-239


AB-239	
Size	Length (in.)
1	8½
2	17
3	25½

Hardware and threaded rod

Threaded rod

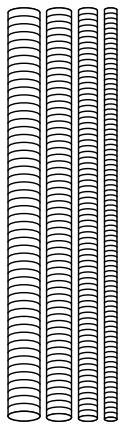

H-104 hanger rod Continuous thread. Standard finish: GoldGalv		
Cat. no.	Thread size (in.)	
H-104-1/4 x 6	1/4-20	
H-104-1/4 x 10		
H-104-1/4 x 12		
H-104-3/8 x 6	3/8-16	
H-104-3/8 x 10		
H-104-3/8 x 12		
H-104-1/2 x 6	1/2-13	
H-104-1/2 x 10		
H-104-1/2 x 12		
H-104-5/8 x 6	5/8-11	
H-104-5/8 x 10		
H-104-5/8 x 12		




Hanger rod load chart	
Rod size (in.)	Ultimate ^{††} loads in lbs.
1/4-20	900
3/8-16	1900
1/2-13	3500
5/8-11	6000

^{††}Safety Factor of 3.

H-119 Steel rod coupling	
Cat. no.	Rod size (in.)
H-119-1/4	1/4
H-119-3/8	3/8
H-119-1/2	1/2
H-119-5/8	5/8

Threaded hardware



E-142 hex head Cap screw (less nut) For connections of fittings to channels, use H-113-A for 3/4" deep channels and H-113-B for all other channels. GoldGalv finish.		
Cat. no.	Size (in.)	Weight (lbs./C)
E-142 1/4x1	1/4 x 1	1
E-142 1/4x1 1/4	1/4 x 1 1/4	2
E-142 1/4x1 1/2	1/4 x 1 1/2	2
E-142 1/4x2 1/4	1/4 x 2 1/4	3
E-142 3/8x3/4	3/8 x 3/4	3
E-142 3/8x1	3/8 x 1	4
E-142 3/8x1 1/4	3/8 x 1 1/4	4
E-142 3/8x1 1/2	3/8 x 1 1/2	5
E-142 3/8x2 1/4	3/8 x 2 1/4	7
E-142 1/2 x15/16	1/2 x 1 5/16	9
E-142 1/2x1 1/4	1/2 x 1 1/4	9
E-142 1/2x1 1/2	1/2 x 1 1/2	10
E-142 1/2x2	1/2 x 2	14
E-142 1/2x2 1/2	1/2 x 2 1/2	16




E-145 hex nut For cap screw applications. GoldGalv® Finish.		
Cat. no.	Size (in.)	Weight (lbs./C)
E-145-1/4	1/4	1.2
E-145-5/16	5/16	2.0
E-145-3/8	3/8	3.2
E-145-1/2	1/2	5.0
E-145-5/8	5/8	9.0
E-145-3/4	3/4	13.0



E-147 flat steel washer		
Cat. no.	Size (in.)	Weight (lbs./C)
E-147-1/4	1/4	0.67
E-147-5/16	5/16	1.20
E-147-3/8	3/8	2.00
E-147-1/2	1/2	3.85
E-147-5/8	5/8	7.70
E-147-3/4	3/4	9.00




E-148 lock washer		
Cat. no.	Size (in.)	Weight (lbs./C)
E-148-1/4	1/4	0.259
E-148-3/8	3/8	0.550
E-148-1/2	1/2	1.436
E-148-5/8	5/8	2.587
E-148-3/4	3/4	4.293




AB-241 square washer			
Cat. no.	Size (in.)	Thickness (in.)	Weight (lbs./C)
AB-241-1/4	1/4	3/8	8.10
AB-241-5/16	5/16	3/8	8.00
AB-241-3/8	3/8	3/16	11.50
AB-241-1/2	1/2	1/4	14.36
AB-241-5/8	5/8	1/4	13.50
AB-241-3/4	3/4	1/4	12.50
AB-241-7/8	7/8	1/4	13.00


AB-242 saddle type washer for rigid attachment of rod to channel. For use with either 3/8" or 1/2" hanger rod.




Support brackets




S-250 Series




S-251 Series




S-247




S-248




S-256 Series




S-204




S-205




S-217




S-218




S-222



S-226



S-236



S-201 L, R




H-152-OS

1" X 1 5/8"

12 Gauge Channel

Weight/100 ft. - 144 lbs.

H-STRUT® channels are available in pre-galvanized, plain, powder-coated, zinc trivalent, aluminum, stainless steel 304, and 316L. Standard lengths are 10' and 20'. Other materials, finishes, and lengths are available upon request.

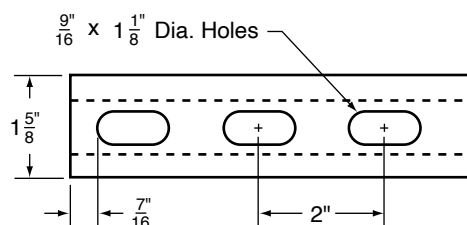

SPECIFICATIONS

General

H-Strut channels are manufactured by a series of forming dies, or rolls, which progressively cold work the strip steel into the desired channel configuration. This method produces a cross-section of uniform dimensions within a tolerance of ± 0.015 " on outside dimensions.

Length Information

H-Strut channels are produced in standard 10' and 20' lengths with a tolerance of $\pm 1/8$ ". Other lengths are available upon request.

Loading Data

1. When calculating load at center of span, multiply load from table by 0.5 and deflection by 0.8.
2. When calculating beam and column loads for aluminum, multiply by 33%.

Material

H-Strut channels are produced from prime structural metals covered by the following specifications.

(See the technical section for additional information.)

- Aluminum (Type 6063T6) ASTM B-221
- Plain Steel ASTM A-1011-SS33
- Pre-Galvanized Steel ASTM A-653-SS33
- Stainless Steel (Type 304 & 316L) ASTM A-240

Other materials and specifications are available upon request.

Finishes

H-Strut is available in powder-coated, and zinc trivalent. Other finishes are available upon request.


- Hot Dipped Galvanized ASTM A-123
- Powder-Coated ASTM B-117
- Zinc Trivalent Chromium (ZTC) ASTM B-633-85

H-152-OS

Section Properties

Catalog No.	Wt./Ft. Lbs.	Area of Section Sq. In.	X-X Axis			Y-Y Axis		
			I in ⁴	S in ³	r in.	I in ⁴	S in ³	r in.
H-152-OS	1.44	0.423	0.055	0.095	0.361	0.162	0.199	0.619

I = Moment of Inertia S = Section Modulus r = Radius of Gyration



Span or Unbraced Height (In)	Static Beam Load (X-X Axis)						Max. Allowable Load at Slot Face (Lbs)	Column Loading Data			
	Max Allowable Uniform Load (Lbs)	Deflection at Uniform Load (In)	Uniform Load at Deflection					Max. Column Load Applied at C.G.			
			Span/180 Deflection (Lbs)	Span/240 Deflection (Lbs)	Span/360 Deflection (Lbs)	Weight of Channel (Lbs)		k=.65 (Lbs)	k=.80 (Lbs)	k=1.0 (Lbs)	k=1.2 (Lbs)
12	1,600	0.02	1,600	1,600	1,600	1.5	2,790	9,290	9,050	8,700	8,350
18	1,070	0.05	1,070	1,070	1,070	2.2	2,660	8,740	8,350	7,860	7,430
24	800	0.09	800	800	600	3.0	2,500	8,180	7,710	7,190	6,710
30	640	0.14	640	580	380	3.7	2,350	7,670	7,190	6,500	5,410
36	530	0.20	530	400	270	4.5	2,190	7,240	6,710	5,410	4,150
42	460	0.27	390	290	200	5.2	2,000	6,900	5,840	4,350	3,070
48	400	0.36	300	230	150	6.0	1,810	6,280	4,980	3,390	2,350
60	320	0.56	190	140	100	7.5	1,440	4,870	3,390	2,170	1,510
72	270	0.80	130	100	70	8.9	1,150	3,560	2,350	1,510	**
84	230	1.09	100	70	50	10.4	940	2,620	1,730	**	**
96	200	1.42	80	60	40	11.9	**	2,000	**	**	**
108	180	1.80	60	40	30	13.4	**	1,580	**	**	**
120	160	2.22	50	40	20	14.9	**	**	**	**	**
144	130	3.20	30	30	20	17.9	**	**	**	**	**
168	110	4.35	NR	NR	NR	20.9	**	**	**	**	**
180	110	5.00	NR	NR	NR	22.4	**	**	**	**	**
192	100	5.68	NR	NR	NR	23.8	**	**	**	**	**
216	90	7.19	NR	NR	NR	26.8	**	**	**	**	**
240	80	8.88	NR	NR	NR	29.8	**	**	**	**	**

Bearing Load may limit load | NR = Not Recommended | ** Not recommended - KL/r exceeds 200

Notes:

- The beam capacities shown above include the weight of the strut beam. The beam weight must be subtracted from these capacities to arrive at the net beam capacity.
- Allowable beam loads are based on a uniformly loaded, simply supported beam. For capacities of a beam loaded at midspan at a single point, multiply the beam capacity by 50% and deflection by 80%.
- The above chart shows beam capacities for strut without holes. For strut with holes, multiply by the following:
 - OS by 88%
- Refer to the latest Haydon Engineering Catalog in our Literature Section for reduction factors for unbraced lengths or call us 1-800-242-9366.

PROJECT INFORMATION			
Project:		Notes:	
Address:			
Contractor:			
Engineer:	Date:		
APPROVAL			
Approved	Signature:		Remarks:
Approved as Noted			
Not Approved			