


Fire Extinguisher Images / scans
document saved 2025.04
- scans from 2022 & 2025

David Malawey



Extintor de incendios de
polvo químico seco de
doble propósito

¿Está usted cubierto?



- Clave
- Alarma de humo
 - Alarma de monóxido de carbono (CO)
 - Extintor de incendios
 - Alarma de calor
 - Escalera de escape

(1) Use alarma de combinación para cumplir con las recomendaciones de colocación de detectores de humo y de CO.
(2) No coloque alarmas a menos de 1,80 cm (8 pies) de aparatos.
NOTA: Estas son solo recomendaciones generales, ya que cada hogar es diferente. Consulte la guía del usuario específica (humo, CO, escape, etc.) para obtener información más detallada sobre la ubicación.



2 Pounds
Fire Fighting Power



Basic Fire Extinguisher

For use on fires involving:

- Household Appliances
- Flammable Liquids
- Electrical Equipment

Model KD57-5BC

Picture shown may not reflect
actual product.

Recommended for
supplementary protection



La Asociación Nacional de
Protección contra Incendios
recomienda un extintor
con capacidad mínima de
2-A: 5-B:C en todos
los niveles de su hogar.




*Según la NFPA 10, los extintores
desechables no requieren análisis
internos cada 6 años. Se requieren
análisis externos anuales y
acciones correctivas.

⚠ ADVERTENCIA: Contenido sometido a alta presión



Dual Purpose
Dry Chemical
Fire Extinguisher

Are you covered?



- Key
- Smoke Alarm
 - Carbon Monoxide (CO) Alarm
 - Fire Extinguisher
 - Heat Alarm
 - Escape Ladder

(1) A combination alarm can satisfy both smoke & CO alarm placement recommendations.
(2) Do not place alarm within 6 ft of appliances.
NOTE: These are general recommendations only, as every home is different. See specific user guide (Smoke, CO, Ladder, etc) for more detailed location information.



0.9 kilos (2 libras)
Potencia para
combatir incendios



Extintor de incendios basico

Para uso en incendios
que involucren:

- Electrodomésticos de cocina
- Líquidos inflamables
- Equipos eléctricos

Modelo KD57-5BC

Es posible que la imagen que se muestra no
refleje el producto real.

Recomendado para
protección complementaria



The National Fire Protection
Association recommends a
minimum 2-A: 5-B:C rated
extinguisher on every level of
your home.

*Per NFPA 10, single use fire
extinguishers do not require
6-year internal examinations.
Annual external examinations
and corrective actions are required.



⚠ WARNING: Contents Under Pressure



A Carrier Company
©2022 Carrier. All Rights Reserved.


See reverse for English.





Extintor de incendios de
polvo químico seco de
doble propósito

¿Está usted cubierto?



(1) Use alarmas de combinación para cumplir con las recomendaciones de colocación de detectores de humo y de CO.
(2) No coloque alarmas a menos de 1,80 cm (8 pies) de aparatos.
NOTA: Estas son solo recomendaciones generales, ya que cada hogar es diferente. Consulte la guía del usuario específica (humo, CO, escape, etc.) para obtener información más detallada sobre la ubicación.



2 Pounds
Fire Fighting Power



Basic Fire Extinguisher

For use on fires involving:

- Household Appliances
- Flammable Liquids
- Electrical Equipment

Model KD57-5BC

Picture shown may not reflect
actual product.

Recommended for
supplementary protection



La Asociación Nacional de
Protección contra Incendios
recomienda un extintor
con capacidad mínima de
2-A: 5-B:C en todos
los niveles de su hogar.



*Según la NFPA 10, los extintores
desechables no requieren análisis
internos cada 6 años. Se requieren
análisis externos anuales y
acciones correctivas.


ADVERTENCIA: Contenido sometido a alta presión

Ver reverso para Español.



Dual Purpose
Dry Chemical
Fire Extinguisher

Are you covered?



(1) A combination alarm can satisfy both smoke & CO alarm
placement recommendations.
(2) Do not place alarm within 6 ft of appliances.
NOTE: These are general recommendations only, as every
home is different. See specific user guide (Smoke, CO,
Ladder, etc) for more detailed location information.



0.9 kilos (2 libras)
Potencia para
combatir incendios



Extintor de incendios basico

Para uso en incendios
que involucren:

- Electrodomésticos de cocina
- Líquidos inflamables
- Equipos eléctricos

Modelo KD57-5BC

Es posible que la imagen que se muestra no
refleje el producto real.

Recomendado para
protección complementaria



The National Fire Protection
Association recommends a
minimum 2-A: 5-B:C rated
extinguisher on every level of
your home.

*Per NFPA 10, single use fire
extinguishers do not require
6-year internal examinations.
Annual external examinations
and corrective actions are required.



A Carrier Company
©2022 Carrier. All Rights Reserved.

See reverse for English.



Fasten tag to extinguisher before mounting unit. Do not remove this tag.

Required for UL listing.

Inspection Record

Date	Inspected by

Model # Model KD57-5BC

Serial #:

Year of MFG:

Kidde

1016 Corporate Park Drive
Mebane, NC 27302-9711
1-800-880-6788 Kidde.com

CTN P/N: 21031879A



**Basic
Fire Extinguisher
Extintor de
incendios basico**

After Purchase:

- ☐ Remove fire extinguisher from box
- ☐ Read use instructions and owner's manual
- ☐ Do not break pull pin seal until needed for use

Después de la compra:

- ☐ Saque el extintor de incendios de la caja
- ☐ Lea las instrucciones de uso y el manual del propietario
- ☐ No rompa el sello del pasador de tracción hasta que sea necesario para utilizar el extintor

Model KD57-5BC

For warranty service contact:

Kidde

**1016 Corporate Park Drive
Mebane, NC 27302**



Kidde



EXTINGUIDOR PARA AUTOS



UL LISTED

- Aprobado por UL
- Aprobado por DOT para vehículo
- 6 años de garantía

La imagen mostrada en la caja puede no reflejar el producto real.



Kidde

Extinguidor de fuegos de químico seco regular

- Abrazadera moldeada (incluida) de fácil instalación
- Aprobado por DOT
- Cilindro de aluminio y válvula de metal resistente
- Indicador que permite verificar la presión instantaneamente
- Aprobado por UL
- Clasificado UL 5-B:C
- Producto desechable, reemplace después del primer uso o a los 12 años

Extinguidor de fuegos adecuado para los siguientes tipos de incendio:

B C



Líquidos inflamables



Equipo eléctrico

ADVERTENCIA: CONTENIDO BAJO PRESIÓN



Kidde



AUTO FIRE EXTINGUISHER



UL LISTED

- UL Listed
- DOT approved for vehicle use
- 6-year warranty

Picture shown may not reflect actual product.



Kidde

Regular Dry Chemical Fire Extinguisher

- Molded strap bracket (included) for easy mounting
- DOT approved
- Aluminum cylinder & tough metal valve assembly
- Gauge allows for immediate pressure status check
- UL listed
- UL rated 5-B:C
- Single use unit; replace after first use or 12 years

This fire extinguisher is suitable for use on the following types of fire:

B C



Flammable liquids



Electrical equipment

WARNING: CONTENTS UNDER PRESSURE





Carton P/N: 21029822A



BC Dry Chemical Fire Extinguisher
Extintor de fuegos de químico seco BC

After purchase, remove product from box and familiarize yourself with the correct operation of the fire extinguisher.

Después de la compra, retire el producto de la caja y familiarícese con el uso correcto del extintor.



Do not break tamper seal until fire extinguisher is needed for fire emergency.

Instructions included in English and Spanish
Instrucciones en inglés y español

Fasten tag to extinguisher before mounting unit. Do not remove this tag. Required for UL listing.

Required for UL listing.

Inspection Record

[illegible]

Model # KD61-5BC

Scouted by

Year of Birth:

Kiddie
1916 Corporate Park Drive
Madison, NC 27022-9711
1-800-640-6708 kiddie.com

MAINTENANCE: Install, maintain, and test in accordance with the standard for portable fire extinguishers, NFPA No. 10. Meets DOT requirements for cylinders. Tested to 585 psi (4033 kPa)

Inspect at least once a month or more frequently. Examine nozzle for obstructions. Make sure that tamper seal is intact.

Check pressure by reading the gauge. If yellow pointer is in the red zone, extinguisher is inoperable.

AFTER USE: Recharge extinguisher immediately after use. Partial discharge may cause extinguisher to leak. Invert extinguisher and press operating lever to discharge all remaining pressure. Return to an authorized recharger for recharging in accordance with Service Manual No. M08- 0145-XXX. Fill only with 2.54 lb. + 3 oz. (1.15 kg. + 0.085 kg.) of WUYUE monoammonium phosphate dry chemical and pressurized with nitrogen to 195 psi (1344 kPa) at 70°F (21.1°C) After use, immediately clean all surfaces contacted by monoammonium phosphate dry chemical agent.

WARNING: Improper use of this extinguisher could cause serious bodily injury or property damage.

CONTENTS MANUFACTURER:

Suzhou Wuyue Synthetic Chemical Factory
Mudu Town, Suzhou City,
Jiangsu Province CHINA
+86-512-66360365

INSTRUCTIONS

**1. PULL PIN.
HOLD UNIT UPRIGHT.**



**2. AIM AT BASE OF FIRE.
STAND BACK 6 FEET.**



6 feet



**3. DEPRESS AND SQUEEZE LEVER.
SWEEP SIDE TO SIDE.**



A

**TRASH
WOOD
PAPER**



B

LIQUIDS



C

**ELECTRICAL
EQUIPMENT**



CAUTION: Contents under pressure. Do not puncture or incinerate. Do not expose to temperatures over 120°F (49°C). Suitable for use from -40°F (-40°C) to 120°F (49°C). Filled with WY monoammonium phosphate dry chemical. HMIS 1-0-0. Ammonium sulphate, muscovite mica, magnesium aluminum silicate. Nuisance dust. Irritant. Pressurized to 195 psi (1344 kPa) Gross weight 4lb 8.735oz ± 3.9oz (2.062kg ± 0.111kg)

2023



LISTED

Dry Chemical Fire Extinguisher

Classification 1-A-10-B-C

Marine Type U.S.C.G. Type B.C. Size I, U.S.C.G.

Approval Number 162.028/EX3622

Valid only with Bracket Number

P87-0340, B70-0169, or B70-0161 and

Strap Number S70-0007.

Tested to ANSI/UL 711 and ANSI/UL 299

No.

102811653

Model FE1A10GR195
EX3622

MEETS DOT REQUIREMENTS

©2019 BRK Brands, Inc. is a subsidiary of Newell Brands Inc. (NSDAQ:NWL)
3901 Liberty Street, Aurora, IL 60504-8122
All rights reserved. Made in Mexico
Customer Service Team: 1-800-323-9005
www.firstalert.com



FIRST ALERT®

L00-159706-168085

MAINTENANCE: Install, maintain, and test in accordance with the standard for portable fire extinguishers, NFPA No. 10. Meets DOT requirements for cylinders. Tested to 585 psi (4033 kPa)

Inspect at least once a month or more frequently. Examine nozzle for obstructions. Make sure that tamper seal is intact.

Check pressure by reading the gauge. If yellow pointer is in the red zone, extinguisher is inoperable.

AFTER USE: Recharge extinguisher immediately after use. Partial discharge may cause extinguisher to leak. Invert extinguisher and press operating lever to discharge all remaining pressure. Return to an authorized recharger for recharging in accordance with Service Manual No. M08-0145-XX. Fill only with 2.54 lb. + 3 oz. (1.15 kg. + 0.085 kg.) of WUYUE monoammonium phosphate dry chemical and pressurized with nitrogen to 195 psi (1344 kPa) at 70°F (21.1°C). After use, immediately clean all surfaces contacted by monoammonium phosphate dry chemical agent.

WARNING: Improper use of this extinguisher could cause serious bodily injury or property damage.

CONTENTS MANUFACTURER:

Suzhou Wuyue Synthetic Chemical Factory
Mudu Town, Suzhou City,
Jiangsu Province CHINA
+86-512-66360365

INSTRUCTIONS


**1. PULL PIN.
HOLD UNIT UPRIGHT.**



**2. AIM AT BASE OF FIRE.
STAND BACK 6 FEET.**



**3. DEPRESS AND SQUEEZE LEVER.
SWEEP SIDE TO SIDE.**

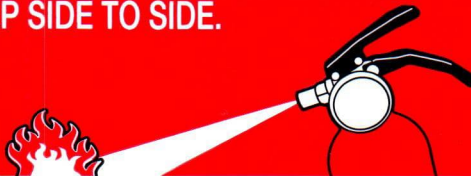

**A TRASH
WOOD
PAPER**



B LIQUIDS



**C ELECTRICAL
EQUIPMENT**



CAUTION: Contents under pressure. Do not puncture or incinerate. Do not expose to temperatures over 120°F (49°C). Suitable for use from -40°F (-40°C) to 120°F (49°C). Filled with WY monoammonium phosphate dry chemical. HMIS 1-0-0. Ammonium sulphate, muscovite mica, magnesium aluminum silicate. Nuisance dust. Irritant. Pressurized to 195 psi (1344 kPa) Gross weight 4lb. 13.64 oz. ± 3.91 oz. (2.2 kg. ± 0.111 kg.)

[2018]



Chemical Fire Extinguisher
Class 1
Tested to 10-B-C
11 and 1
UL 2018

Marine Type
U.S.C.G. Tyj
Approval Number
162.02 X3622
Valid only with
Bracket Number
Bracket Number B70-0161
and Strap Number S70-0007.

Model FE1A10GR195
EX3622

©2012 BRK Brands, Inc. a Jarden Corporation company (NYSE:JAH)
3901 Liberty Street Road, Aurora, IL 60504-8122
All rights reserved
Consumer Affairs: 1-800-323-9005
www.firstalert.com
Made in Mexico

First Alert® is a registered trademark of the First Alert trust.

First Alert®

L00-1200-114