

Scanned Manual - 4ch Headphone Amplifier (for home stereo / subwoofer setup)

2025.06 Amazon

HOSONGIN \$36 headphone
amp 4ch


Compact ultra-low noise 4-channel headphone amplifier for easy and fast operation, also ensures the highest sound quality and signal fidelity at the highest volume

Operating elements and interfaces


On the back - 1



Positive

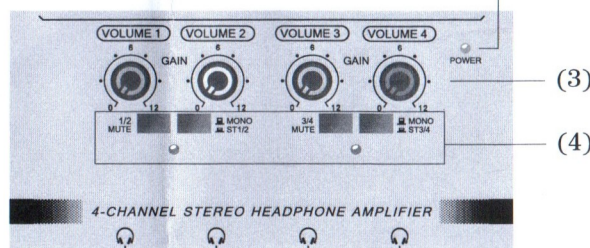

On the back - 2

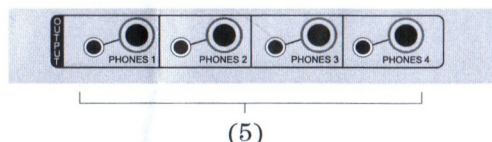

- (1) Connect the accompanying power connector through 5V interface. When the POWER connector is connected to the POWER supply, your mixer will automatically turn on and the POWER light will come on. To separate the mixer from the power supply, unplug the power supply. Note: When you put the mixer into operation, make sure the power plug is located within easy reach. If the mixer is mounted in a rack, make sure it can be easily separated from the power supply by a plug or all-pole power switch.
- (2) QUTPUT jack (output) transmits MIX signal. It is a set of mono interfaces with 6.3MM and 3.5MM interfaces, respectively.
- (3) Gain knob: adjust the amplification coefficient of the amplifier to determine the basic volume of the channel.
- (4) Press this switch, the channel of the main mixing will be silent, the auxiliary channel of the mono will not be silent. It is useful to switch channels and to isolate channels that are not currently in use or to pre-adjust the channel level. Used to determine the input signal level in the mix and to provide a visible channel level indication.
 - This switch is set to be on or off to listen to the channel front via the phone jack.
 - To reduce noise, close all unused channels.
- (5) Used to convert the signal between monophonic and stereo.
- (6) Used to connect the output of headphones or speakers. Each channel is a set of mono interfaces, which are 6.3MM and 3.5MM interfaces respectively. Warning: High volume may impair hearing or damage your headphones or speaker. Before you start running the mixer, set the volume to a minimum and always keep it at an appropriate level.

