


Purchased @ lowes around 2021, manual setup in 2025

PONY | JORGENSEN™

#60400

OWNER'S GUIDE

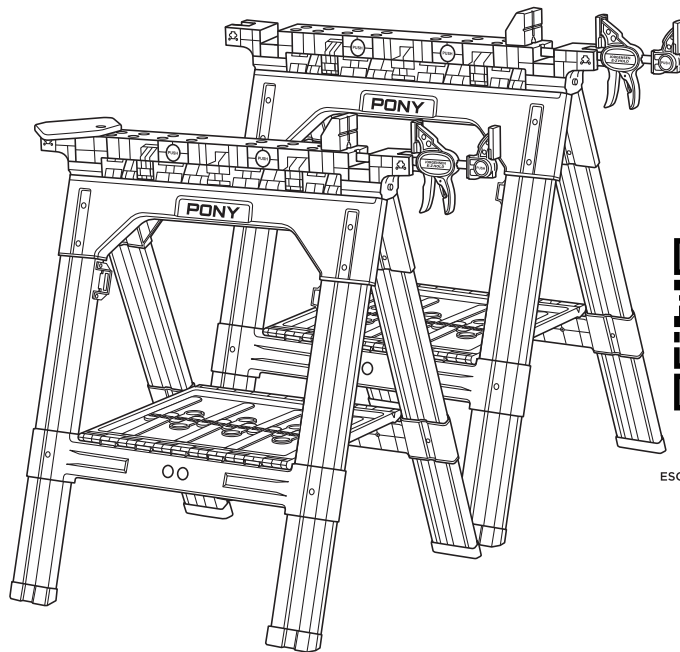

SCAN TO VIEW VIDEO
NUMÉRISER POUR
REGARDER LA VIDÉO
ESCANEAR PARA VER EL VIDEO

CLAMPING SAWHORSES

PONY | JORGENSEN

Saddle Brook, NJ 07663 USA
ponyjorgensen.com



Made in China I



Rev 03/2024



Youtube video linked.
<https://www.youtube.com/watch?v=n8wHfgsqHAg>
Channel: Pony Jorgensen
Length: 2:08 minutes

IMPORTANT

Please read the instructions in this booklet thoroughly before use. Understanding how this sawhorse works and setting it correctly is fundamental to obtaining a satisfactory result.

WARNING


Read all safety warnings and all instructions. Failure to follow the warnings and instructions may cause injury and misuse. Failure to comply with the safety instructions will invalidate the limited warranty. Save all warnings and instructions for future reference.



WARNING: Pinch points

INCLUDED

A	Sawhorse (2 pieces)	
B	E-Z HOLD® Clamp (2 pieces)	Model # 33612
C	Bench Dogs (2 pieces)	Model # 60401
D	Angle Clamp Adapter	Model # 60402

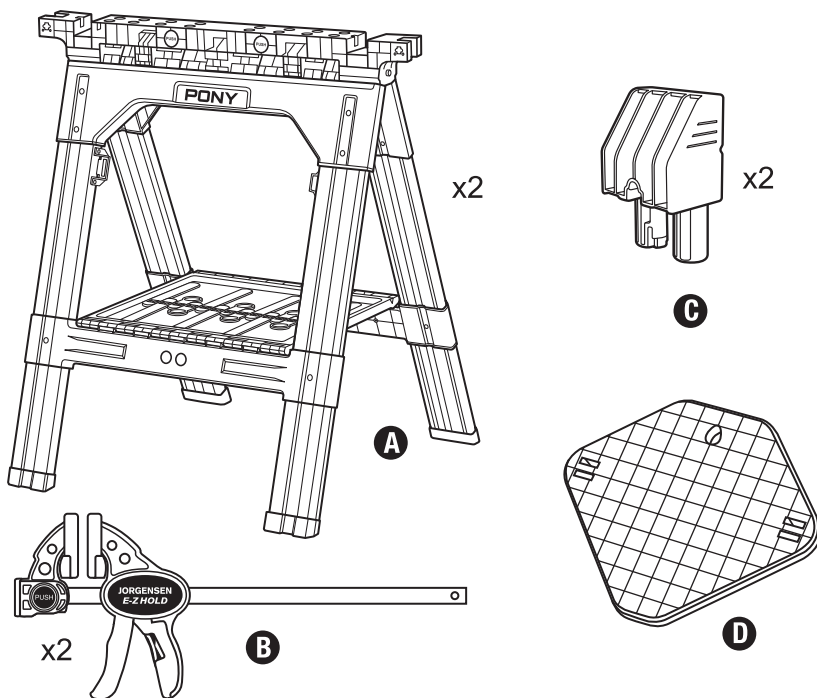

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please contact customercare@ponyjorgensen.com as soon as possible.

IMPORTANT SAFETY INSTRUCTIONS

1. Do not load with more than 600 lbs. (272 kgs) on one piece sawhorse and 1200 lbs. (545 kgs) on two sawhorses. Do not leave heavy loads on work surface for extended periods of time.
2. Ensure Sawhorse is set up on firm, level ground. Check for stability before each use.
3. Do not apply an unbalanced load which could cause the Sawhorse to tip over.
4. Do not use the Sawhorse as a stepladder or standing platform. Do not use the lower tool tray as a stepping stool.
5. Be sure that the legs are fully opened.
6. Avoid applying excessive force when clamping with the supplied clamps.
7. Safety attire guidelines:
 - Do not wear loose clothing or jewelry, which can be caught in moving parts.
 - Non-skid footwear is recommended when working outdoors.
 - Secure long hair or wear protective hair covering to avoid it getting caught and potential injury.
8. Recommended personal protective equipment:
 - Use safety glasses.
 - Use face or dust mask when working operations that create or involve dust.
9. Do not cut or drill into the Sawhorse as it may weaken supports and/or damage the product.
10. Caution required when using high temperature tools (heat guns, torch, solder iron, etc.) may damage Sawhorse and/or reduce clamping capability.
11. Do not store flammable liquids on the Sawhorse.
12. When not in use, tools should be stored in a secure, dry place, out of the reach of children and unauthorized usage.

SPECIFICATIONS

Weight Capacity for Single Sawhorse	600 lbs
Weight Capacity for a Pair of Sawhorse	1200 lbs
Max Weight Capacity for Tool Tray	20 lbs
Max Clamping Span	26"
Working Size	32" x 30.75" x 48"
Folded Size	34" x 30.75" x 5"
Weight	26 lbs

Check ponyjorgensen.com for product or distributor information.

Scan to view introduction video



OPERATION: OPENING THE SAWHORSE

The portable clamping Sawhorses are packaged completely folded.

To open:

1. Place the Sawhorse upright on the floor.
2. Open the legs fully until the tool tray is flat. The Sawhorse legs and tool tray should create an "A" shape. (Figure 1)

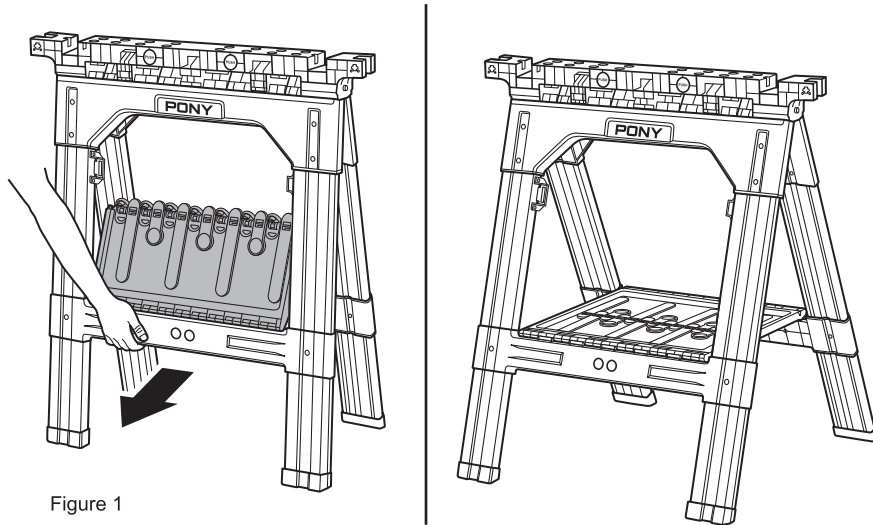


Figure 1

ADJUSTABLE CLAMPS

Take down the trigger clamp from the sawhorse. Remember to take the clamp from the right side first and then the whole clamp can be pulled out easily. (Figure 2)



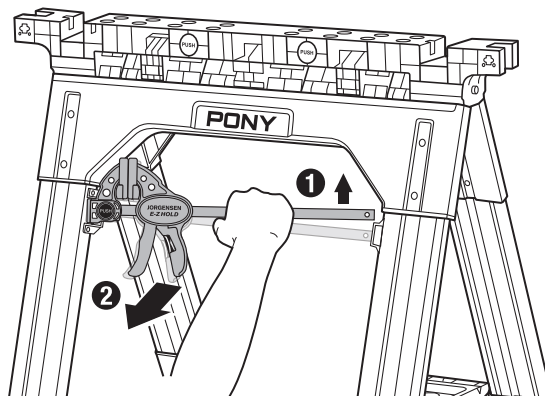


Figure 2

Adjust the trigger clamp according to your needs. (Figure 3)

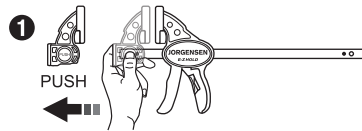

Remove the stationary jaw from the clamp by pushing the press button.

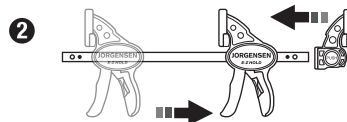

Sliding the moveable jaw along the bar of the clamp to the other end.

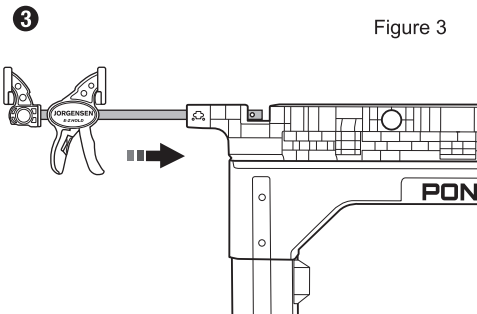


Figure 3

Insert the trigger clamp to the slot on the sides of the sawhorse.

Press the button closest to the side you are using and align the trigger clamps with the slot and insert it fully as shown. Once the clamps are inserted, release the button. (Figure 4)

Push the bench dogs into the desired holes on the sawhorse. (Figure 5)

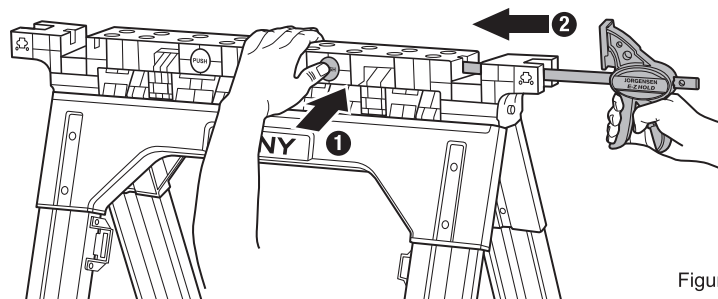


Figure 4



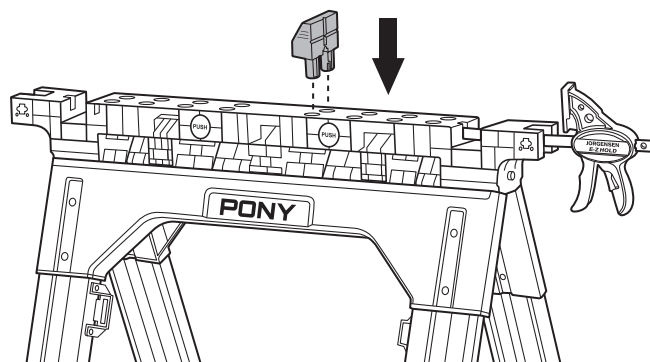


Figure 5

Bench dogs and quick clamps can be used for multiple clamping options.(Figure 6)

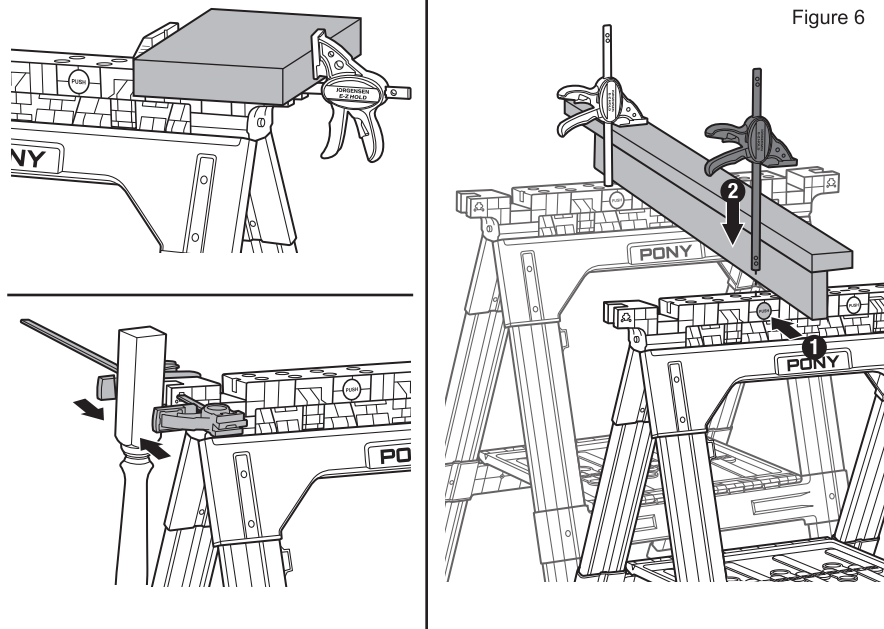

12" E-Z HOLD® Trigger Clamps can be used independently if desired.

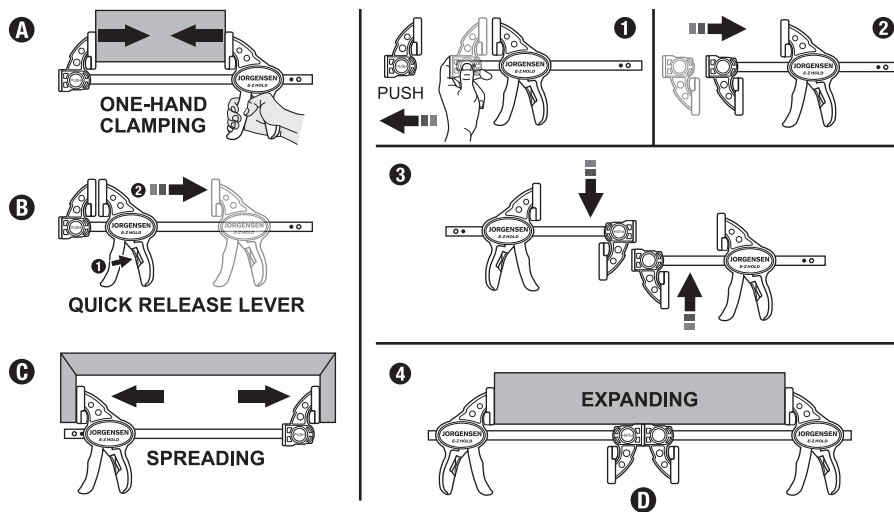

Using standard off the shelf lumber, a premade project panel for the tabletop, you can build yourself a solid wood sawhorse desk.(Figure 7)

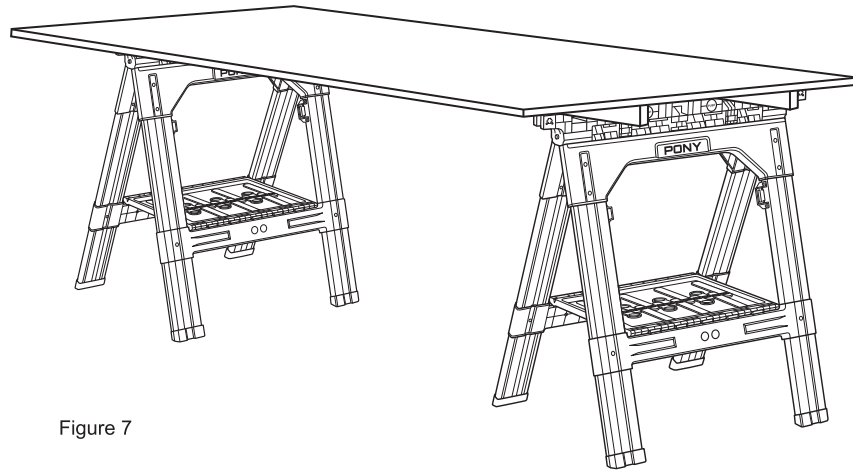


Figure 7

Use the built-in tool tray for hardware and other parts storage. (Figure 8)

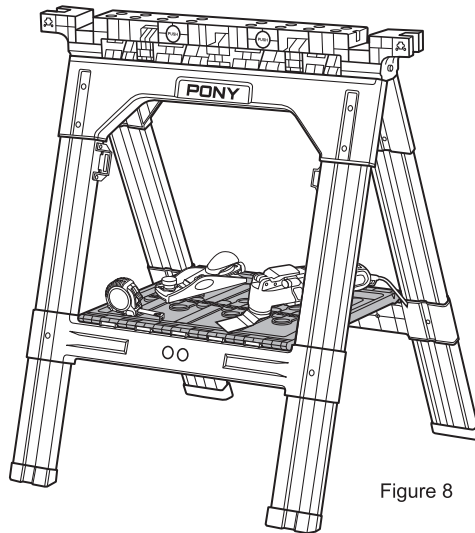


Figure 8

ANGLE CLAMP ADAPTER APPLICATION

The Sawhorse comes with an angle clamp adapter which is perfect for joining corners when using with the Pony angle clamp. (Figure 9)



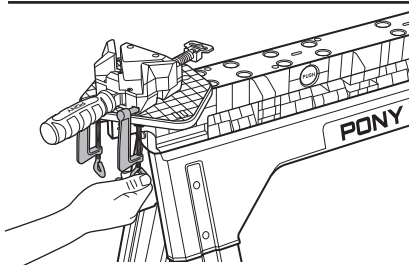


Figure 9

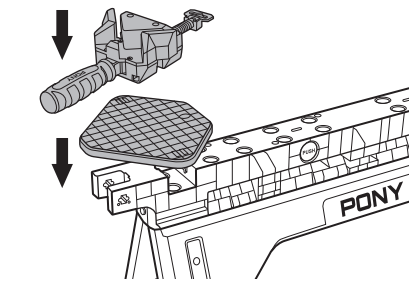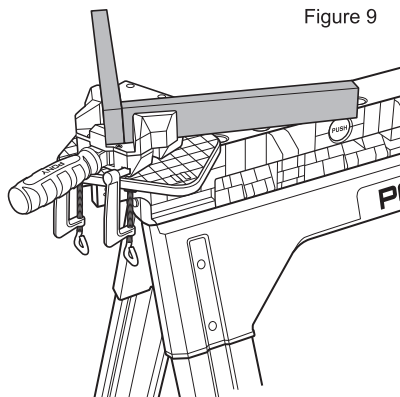

*Angle Clamp sold Separately -
Model #9180

Check ponyjorgensen.com for product
or distributor information.

OPERATION: CLOSING THE SAWHORSE

1. Lift the tool tray in the center to allow the legs to fold. (Figure 10)
2. The fold flat Sawhorse for easy transport and storage. (Figure 11)

⚠ WARNING: Keep fingers away from moving joints to avoid pinching.

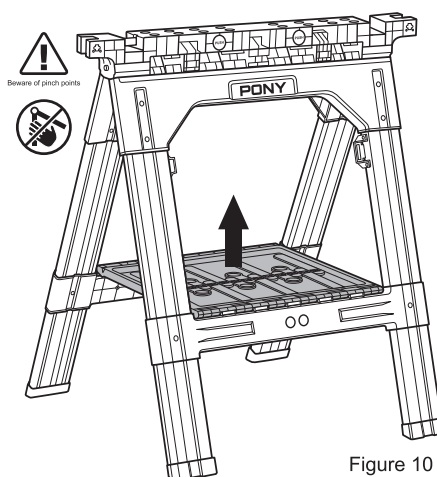


Figure 10

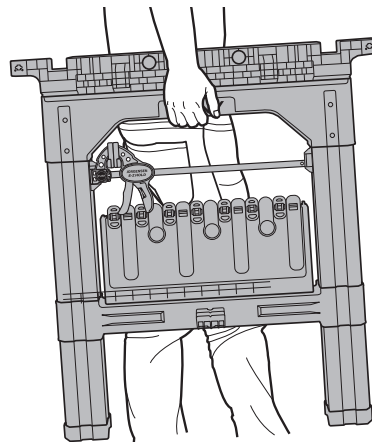


Figure 11

MAINTENANCE

Use mild soap and a damp cloth to clean the tool. Never let any liquid get inside the product; never immerse any part of the product into a liquid.

WARRANTY

3 YEAR LIMITED WARRANTY: Pony | Jorgensen warrants this product a 3 years limited warranty to the original purchaser for as long as the original purchaser owns the product against deficiencies in material and workmanship. This 3 years limited warranty does not cover products that are improperly used, abused, or altered, or damaged due to improper repair. Deficient products will be replaced or repaired. Please contact customercare@ponyjorgensen.com

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PONY | JORGENSEN

Saddle Brook, NJ 07663 USA

ponyjorgensen.com   

PATENTS PENDING