Constellation Deployment General Strategy

Joan Cebrían, Roger Fraixedas, Marina Pons and Xavi Tió

19th October 2016

1 Launching System

The aim of this section is the selection of a launching platform. First of all, a review of the available ones on the market is carried out, secondly a small group of launchers is chosen and finally, an optimization is developed in order to find the most suitable system.

1.1 Launch site and vehicle analysis

Now a days there is such a great amount of launchers available over the world. Nevertheless, most of them are designed for very specific missions. In addition, the space career of a country is usually highly attached to the government, for both economic and political reasons. When searching for a launching system, some parameters have to be taken into an account like payload mass, inclination possible angles, launching site, etc. This analysis only considers those rockets which parameters seem adequate for the Astrea constellation launching.

A general research is done in order to filter all the launchers that can be discarded without any study. The result of this research is that there are seven potential rockets in the market capable of deploying the constellation as well as carrying out the replacement needs. The launchers can be divided in two categories: the powerful ones and the small ones. The firsts are capable of carrying heavy payloads, however they present high operation costs whereas the seconds are way more economic due to the reduced size. In addition, the small rockets are more focused on commercial flights without having to attend governmental issues.

The following table displays the first seven candidates.

ENTERPRISE	ROCKET	LAUNCHING SITE	TYPE
Rocket Labs	Electron	North Island (New Zealand)	Light
Kosmostras	Dpner	Baikonur Cosmodrome (Kazakhstan)	Light
Arianespace	Ariane V	Guiana Space Center (French Guiana)	Heavy
Arianespace	Vega	Guiana Space Center (French Guiana)	Light
SapceX	Falcon 9	USA	Heavy
PLDSpace	ARION-2	Huelva and Cape Canaveral	Light
LEO Launch and Logistics	-	USA	Light

Table 1: List of Launchers

1.2 Last candidates and selection

Once this first selection is done, more accurate information is needed so as to reach a reliable conclusion. However, none of these enterprises shows its information on the Internet or any similar divulgation channel with the exception of Arianespace. Thus, all of them must be contacted to get the needed data. The same email is sent to all seven enterprises and several days later, three of them show interest in the Astrea constellation: Rocket Labs, PLDSpace and LEO Launch & Logistics. Since the other enterprises do not answer the requests and, as a consequence, will not provide the necessary information, they can be directly discarded. Hence, the candidates list is reduced to those three who responded the enquire plus Vega, given that its information is available online. Although the needed data of Ariane V is also known, it is discarded by the fact that it presents high operation costs and it is capable of carrying about 5,000 cubesats 3U when the Astrea constellation will have 168 sats. Therefore, the four remaining candidates are studied in more detail and are subjected to an optimization.

In order to find the most suitable option achieving the project objectives, it is thought to do an evaluation process following the Ordered Weighted Average Method (OWA). First of all, the required parameters for the decision have to be determined. According to the orbit design, the range of inclinations, the number of orbital planes and the range of heights must be taken into an account. Nevertheless, more parameters are needed in order to ensure a reliable result: cost per satellite, frequency of launchings per year and number of satellites deployed per launch. Both range of inclinations and number of satellites per launch act as a restriction due to the following two reasons. First, since orbital plane changes are very expensive and are out of consideration, the minimum number of launchings must equal the number of orbital planes. In addition, being capable of deploying the constellation with the minimum number of launchings is an adequate solution. This turns the number of CubeSats per launch into a restriction, the chosen launcher must be capable of launching at least the number of satellites in an orbital plane. Secondly, the inclination is considered a restriction by the fact that if a rocket is not capable of deploying a satellite in the desired inclination, it makes no sense to use it.

Since the number of orbital planes is 8 and the inclination is 72°, any launcher which doesn't fulfills one of this restrictions can be automatically rejected.

Moreover, the following table contains all the information mentioned above which is helpful to compare the different launchers and see if they accomplish the basic features.

Rocket Lab	PLD	LEO L&L	Vega	
Satellites/Launch	24	34	150	325
Inclination ()	39.2 to 99	116 or 140	any	any
Cost/Satellite (US dollars)	240,000	-	266,667	100,000
Orbital planes	1	1	1	1
Frequency/year	9	8	8	2
Range of heights (km)	LEO	LEO	LEO	LEO

Table 2: Criteria

It is important to point out that all the rockets available in the market can achieve the necessary amount of satellites per launch. Although all of them reach the height the CubeSats need, PLD does not attempt the inclination needed which is 72°. As a result, this launcher is not appropriate for the project purpose and it is rejected. According to the remaining 3 candidates, all of them are adequate candidates, nevertheless there is a characteristic that may interfere with the mission goals. At first instance, the frequency per year has not been considered a critical parameter. Those have been chosen regarding orbital parameters only, however, although the frequency does not influence de capability of the rocket of deploying a CubeSat in the desired orbit, it can compromise the set up of the constellation and the posterior replacements. The lower the frequency is, the slower the deployment will be. Therefore, the frequency of the three remaining candidates must be analyzed. As seen in the table, Vega presents the lowest frequency (two launchings per year). This value is not acceptable due to the intention of deploying one single orbital plane per launch. Thus, Vega can also be discarded.
This leaves the selection with only two options: Rocket Lab and LEO Launch&Logistics. An Ordered Weighted Average can be made between those two candidates taking the cost/satellite, the number of orbital planes, the frequency and the range of heights into account. Yet, they both present the same number of planes and

range of heights, consequently the OWA can be done regarding only the two cost and frequency. The first has to be minimized and the second maximized. Since Rocket Lab presents best values in one parameter and the other there is no need to develop an OWA. In addition, an e-mail from Rocket Lab is received stating that a launch per week is achievable. Thus, the chosen rocket is Electron, from Rocket Lab enterprise. This rocket fulfills all the requirements of the constellation.

Figure 1: Electron Rocket

1.3 Launcher overview

Following, a brief description of Electron is provided.

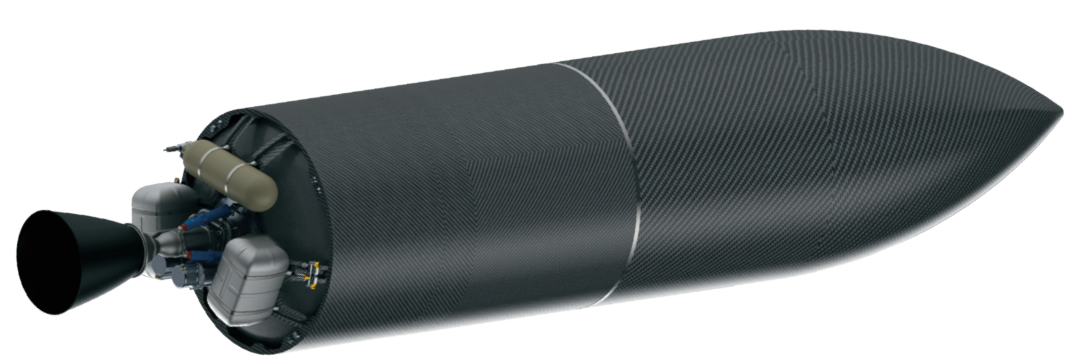

Figure 2: Second Stage

Shown in figure 1, Electron is a two stage light rocket constructed from carbon fiber composite. It is powered by ten Rutherford engines, all of them use liquid oxygen (LOX) and rocket kerosene. The first stage has nine out of the ten engines which generate 152 kN of thrust. The second one, displayed in figure 2, has the remaining engine which produces 22 kN. The second stage contains the fairing where the payload is placed. Electron is 17 m long and its diameter is 1.2 m. It is capable of launching 24 3U CubeSats every week at a LEO orbit with a range of inclinations from 39.2 to 99 degrees.

Figure 3: Electron Rocket Fairing

The injection maneuver is carried out following the flight profile shown in the table 3. The accuracy of the injection is mission dependent, however a typical value would be ±15 Km. According to the CubeSat/Fairing interface, Electron is compatible with the standard CubeSat deployers like ISIS or P-POD, in addition, if those deployers are used, Rocked Lab is able to situate the satellites inside the rocket in a more efficient disposition.

Event	Time (s)	Altitude (km)
Lift-off	0	0
Max Q	79	11
MECO/S1 Separation	152	69
Stage 2 Igintion	159	69
Farinig Separation	183	110
SECO	457	284
Satege 2 Apogee Kick	3157	499
Payload Separation	3200	500

Table 3: Flight Profile

Rocket Lab facilities are located in New Zeland. The test laboratories are placed near the airport of Auckland and the launch site is in Mahia. (Figure 4) Finally, the cost per satellite is 240.000 US dollars or if the rocket is totally filled, 5.760.000 US dollars the entire launch.

2 Deployer

The objective of this section is to give a brief explanation of what is a deployer and how it works. Additionally, some examples of available ones in the market

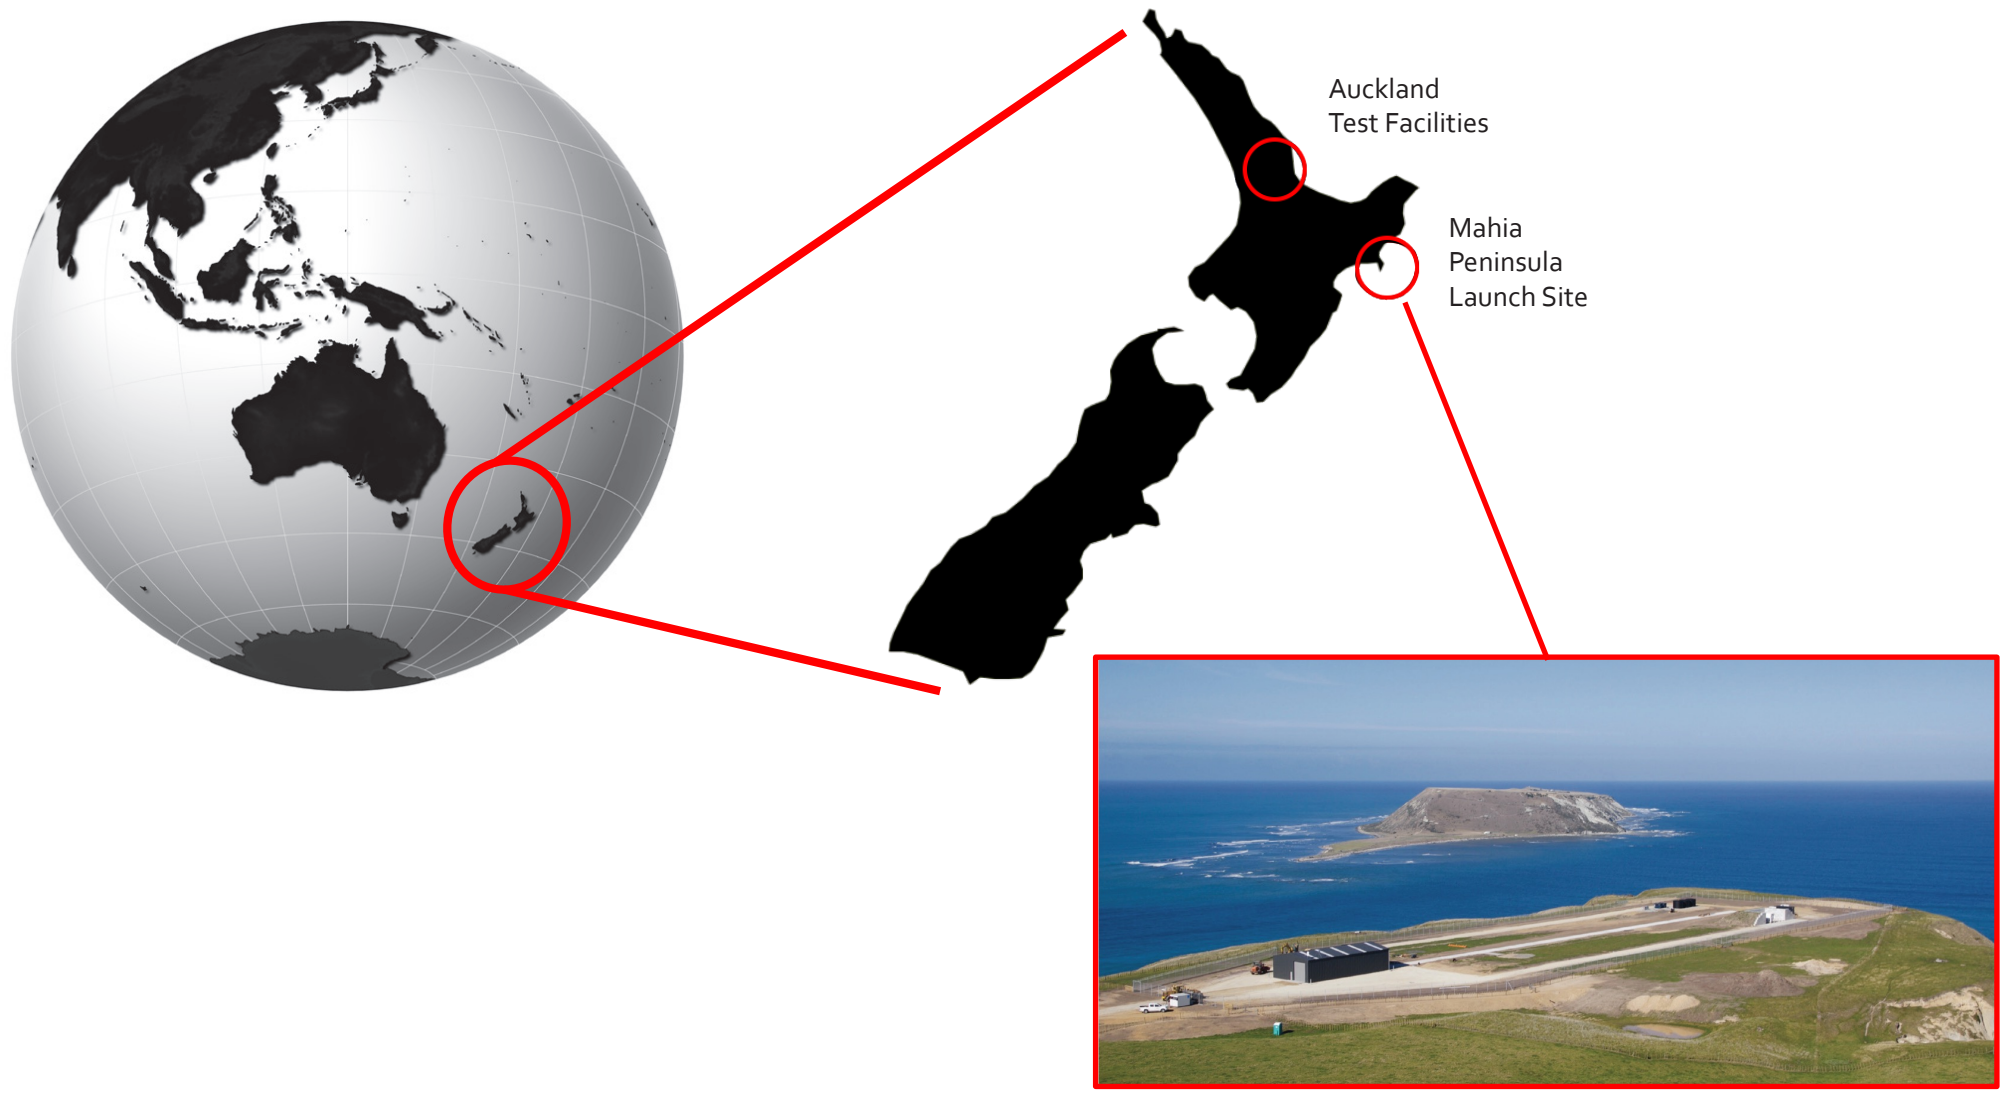

Figure 4: Rocket Lab Facilities

are shown and so is the selected one.
As introduced above, there must be an adaptor between the rocket and the satellite in order to ensure subjection during the flight, efficient organization of the space in the fairing and a correct separation during the injection maneuver. This duty falls on the deployer. It consists on a prismatic structure prepared to carry the CubeSat inside. When the desired orbit is reached, the deployer uncovers one of its faces so as to let the satellite leave. There is a spring in the bottom that provides a little push to ensure that the CubeSat separates from the rocket. There are many types of deployers, some of them are designed for an specific type of mission. As stated before, Electron is compatible with the standard CubeSat deployers, hence, only this type is considered. Similar to the case of the launcher selection, almost all the enterprises don't show enough information on the internet to reach a reliable conclusion, thus, some of them are contacted. Only two answers are obtained, one from ISIS (ISIPOD Deployer) and GAUSS (GPOD deployer). POD stands for Pico-satellite Orbital Deployer. They both present similar characteristics, however there are some differences. First, the main features that both offer are outlined, secondly, the small differences between them are pointed out.

- Main features
  - Provide deployment status signal.
  - No battery needed nor external power source
  - No pyrotechnics
  - Protect the CubeSat from external environment

  - Mechanically interfaces with the CubeSats by means of guidelines
  - Mechanically interfaces with the launch vehicle by means of standard fasteners
  - Qualified for multiple of launch vehicles

- ISIPOD
  - The satellites are fully enclosed inside the deployer, once the CubeSat is fit in, there is no access to it (see image...)
  - Electrically interfaces with launch vehicle for telemetry

- GPOD
  - Accessible panels: all the side panels allow the access to the integrated CubSat (see image...). This means that the entire area between the guide rails over the entire CubeSat length may be freely accessed.
  - The price for a single deployer 3U is 16000 euros.

In order to reach a reliable conclusion, two issues must be taken into consideration. First, the CubeSats of the Astrea Constellation are equipped with thrusters which increase the length of the satellite, thus, the deployer chosen cannot be fully closed. This condition automatically rejects the ISIPOD, nevertheless, there is a second reason for choosing the GPOD, the enterprise ISIS does not show the prices of their deployers even when a request is sent. Without this information it is decided that it cannot be taken into account.

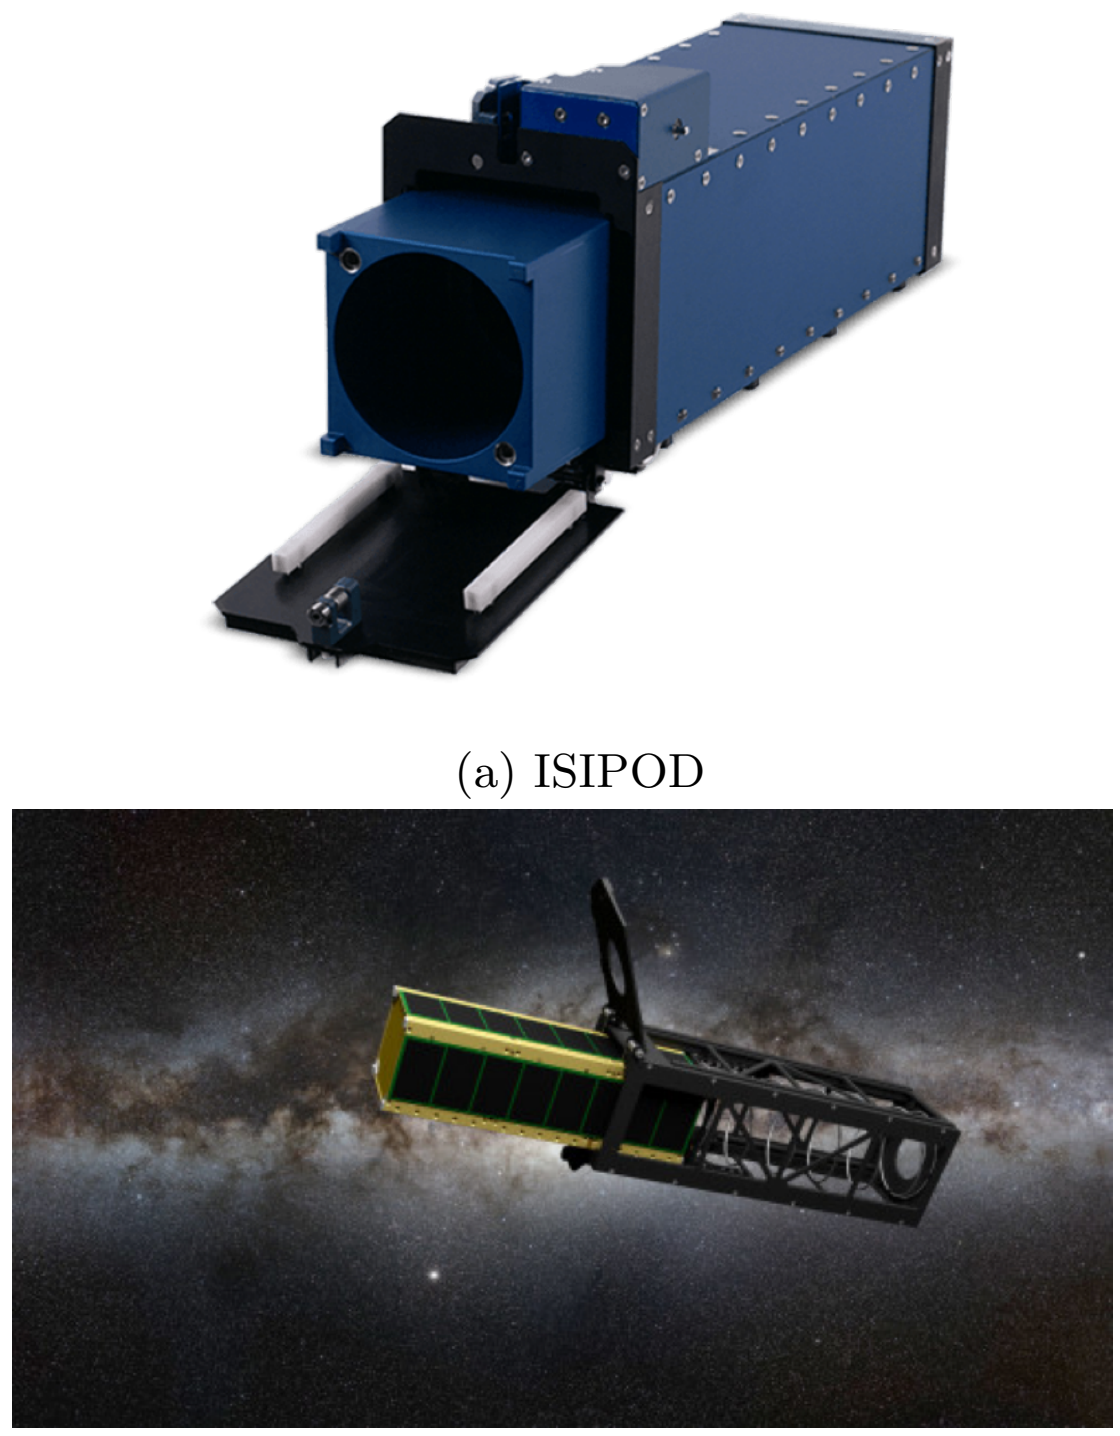

(a) ISIPOD

(b) GPOD

Figure 5: Deployer Candidates