


K215

LCD VISION CHART

High-definition visual acuity testing for professional eye care.

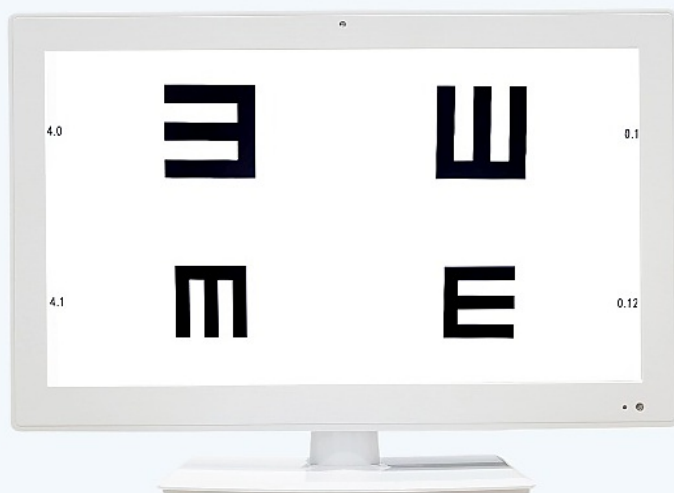

KEY SPECIFICATIONS

21.5 inch

LED display

1920 x 1080

Full HD resolution

1-6.5 m

Adjustable working distance

DECIMAL / FRACTION

Acuity notation

CLINICAL CHART LIBRARY

- Snellen E
- Landolt C
- Letters
- Numbers
- Children's symbols
- Astigmatic clock dial
- Worth four-dot
- Cross-ring and cross charts
- Red-green charts
- Dot and grid charts
- Color vision charts
- Stereoscopic charts*

**Stereoscopic charts use red-green separation and require compatible red-green glasses.*

DESIGNED FOR Hospitals | Eye clinics | Optical centers | Eyewear stores

PROFESSIONAL FEATURES

Standalone or integrated

Use independently or integrate with the compatible CV-700 system at devices.lznmed.com.

Randomized optotypes

Chart symbols can change randomly to support reliable testing.

Flexible presentation

Display a single optotype, one row, or one column.

Mirror mode

Supports mirrored display for compact examination rooms.

Pointer mode

Pointer-control mode helps guide the patient during testing.

Remote operation

Direct chart selection with the supplied remote controller.

TECHNICAL SPECIFICATIONS

Model K215

Resolution 1920 x 1080

Working distance 1-6.5 m (5 m standard)

Power consumption 60 VA

Weight Approx. 4 kg

Acuity notation Decimal / Fraction

Display 21.5-inch LED, 16:9

Brightness 80-320 cd/m2

Power input AC 100-240 V, 50/60 Hz

Dimensions 540 x 150 x 380 mm

VESA mounting 100 x 100 mm

Installation Desktop / Wall mount

PACKAGE CONTENTS

- LCD vision chart x1
- Remote controller x1
- Wall-mount kit x1
- Power adapter x1
- Power cord x1
- User manual x1