



5-48VDC Input, 3.7VDC Output Regulator

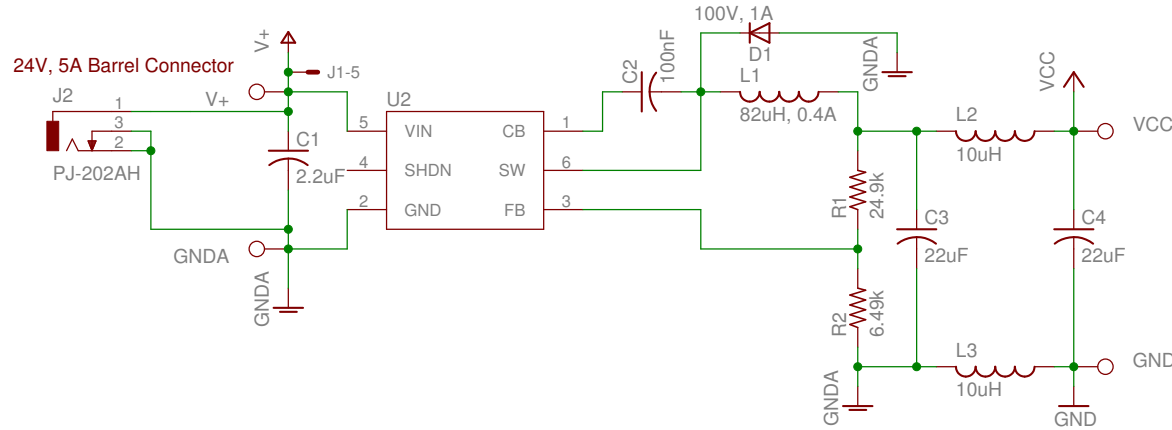


4x 700mA Current Sinks


RCTL Topology allows fast response with peak current limit of 25mA for compatibility with MK20DX256VLH7, but with <2mA steady-state current.

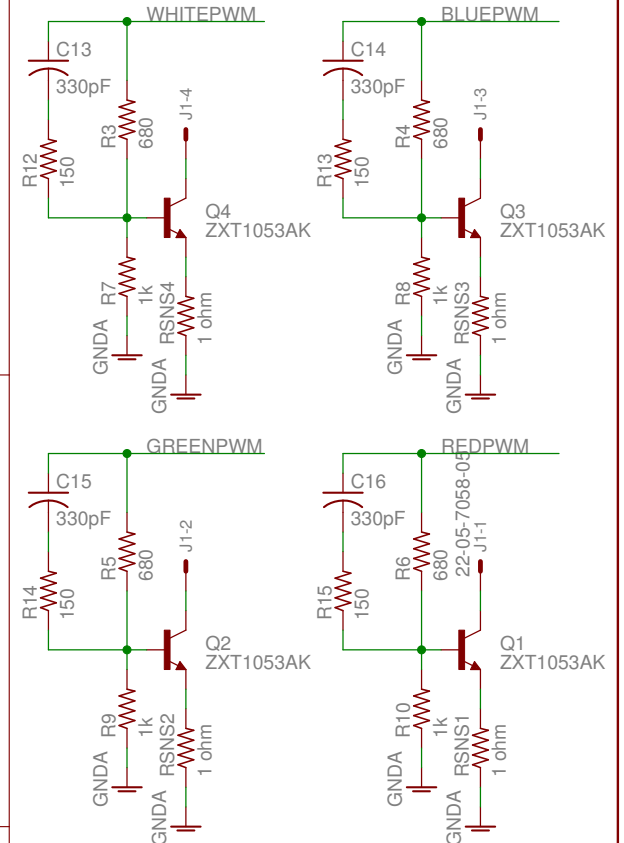


Teensy 3.1 Socket

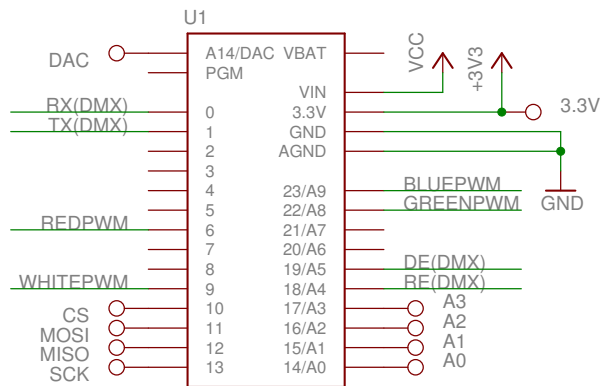


RJ45 DMX Connector

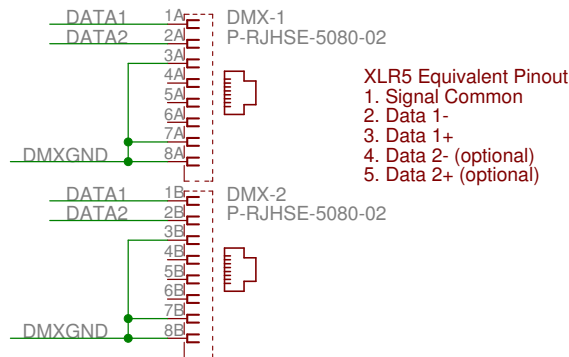


Isolated DMX Interface

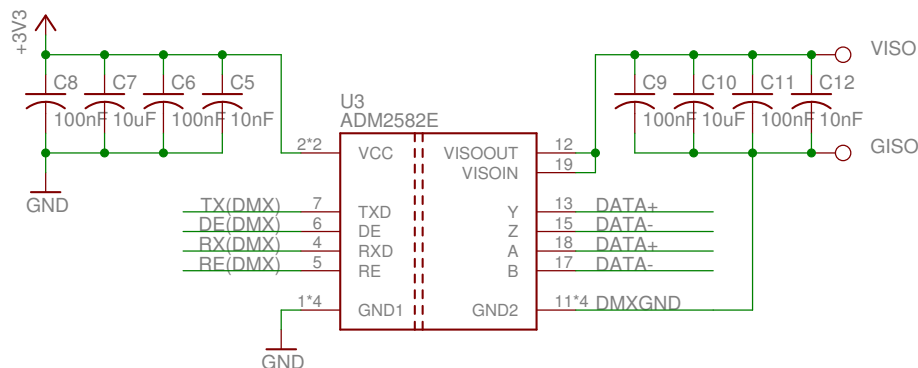

DMX Termination Resistor Switch



DMX Signal Polarity Jumper



L1 - LPS5030-823MRB
D1 - DFSL1100-7

SaikoLED TeensyLED Breakout Board
Brian Neltner, SaikoLED LLC, neltnerb@saikoled.com

TITLE: TeensyLED	VERSION: X1
Document Number: 15041400	REV: 15042100
Date: 4/21/15 4:42 PM	Sheet: 1/1

