THE PROCESSOR HAZARDS – P2

Prof. Sebastian Eslava Ph.D.

Exceptions and Interrupts

- "Unexpected" events requiring change in flow of control
  - Different ISAs use the terms differently
- Exception
  - Arises within the CPU
    - e.g., undefined opcode, overflow, syscall, …
- Interrupt
  - From an external I/O controller
- Dealing with them without sacrificing performance is hard

Handling Exceptions

- In MIPS, exceptions managed by a System Control Coprocessor (CP0)
- Save PC of offending (or interrupted) instruction
  - In MIPS: Exception Program Counter (EPC)
- Save indication of the problem
  - In MIPS: Cause register
  - We'll assume 1-bit
    - 0 for undefined opcode, 1 for overflow
- Jump to handler at 8000 00180
  - arithmetic overflow

An Alternate Mechanism

- Vectored Interrupts
  - Handler address determined by the cause
- Example:

Undefined opcode:	C000 0000
Overflow:	C000 0020
….:	C000 0040

- Instructions either
  - Deal with the interrupt, or
  - Jump to real handler

Handler Actions

- Read cause, and transfer to relevant handler
- Determine action required
- If restartable
  - Take corrective action
  - use EPC to return to program
- Otherwise
  - Terminate program
  - Report error using EPC, cause, …

Exceptions in a Pipeline

- Another form of control hazard
- Consider overflow on add in EX stage

  `add $1, $2, $1`
  - Prevent $1 from being clobbered
  - Complete previous instructions
  - Flush add and subsequent instructions
  - Set Cause and EPC register values
  - Transfer control to handler
- Similar to mispredicted branch
  - Use much of the same hardware

Pipeline with Exceptions

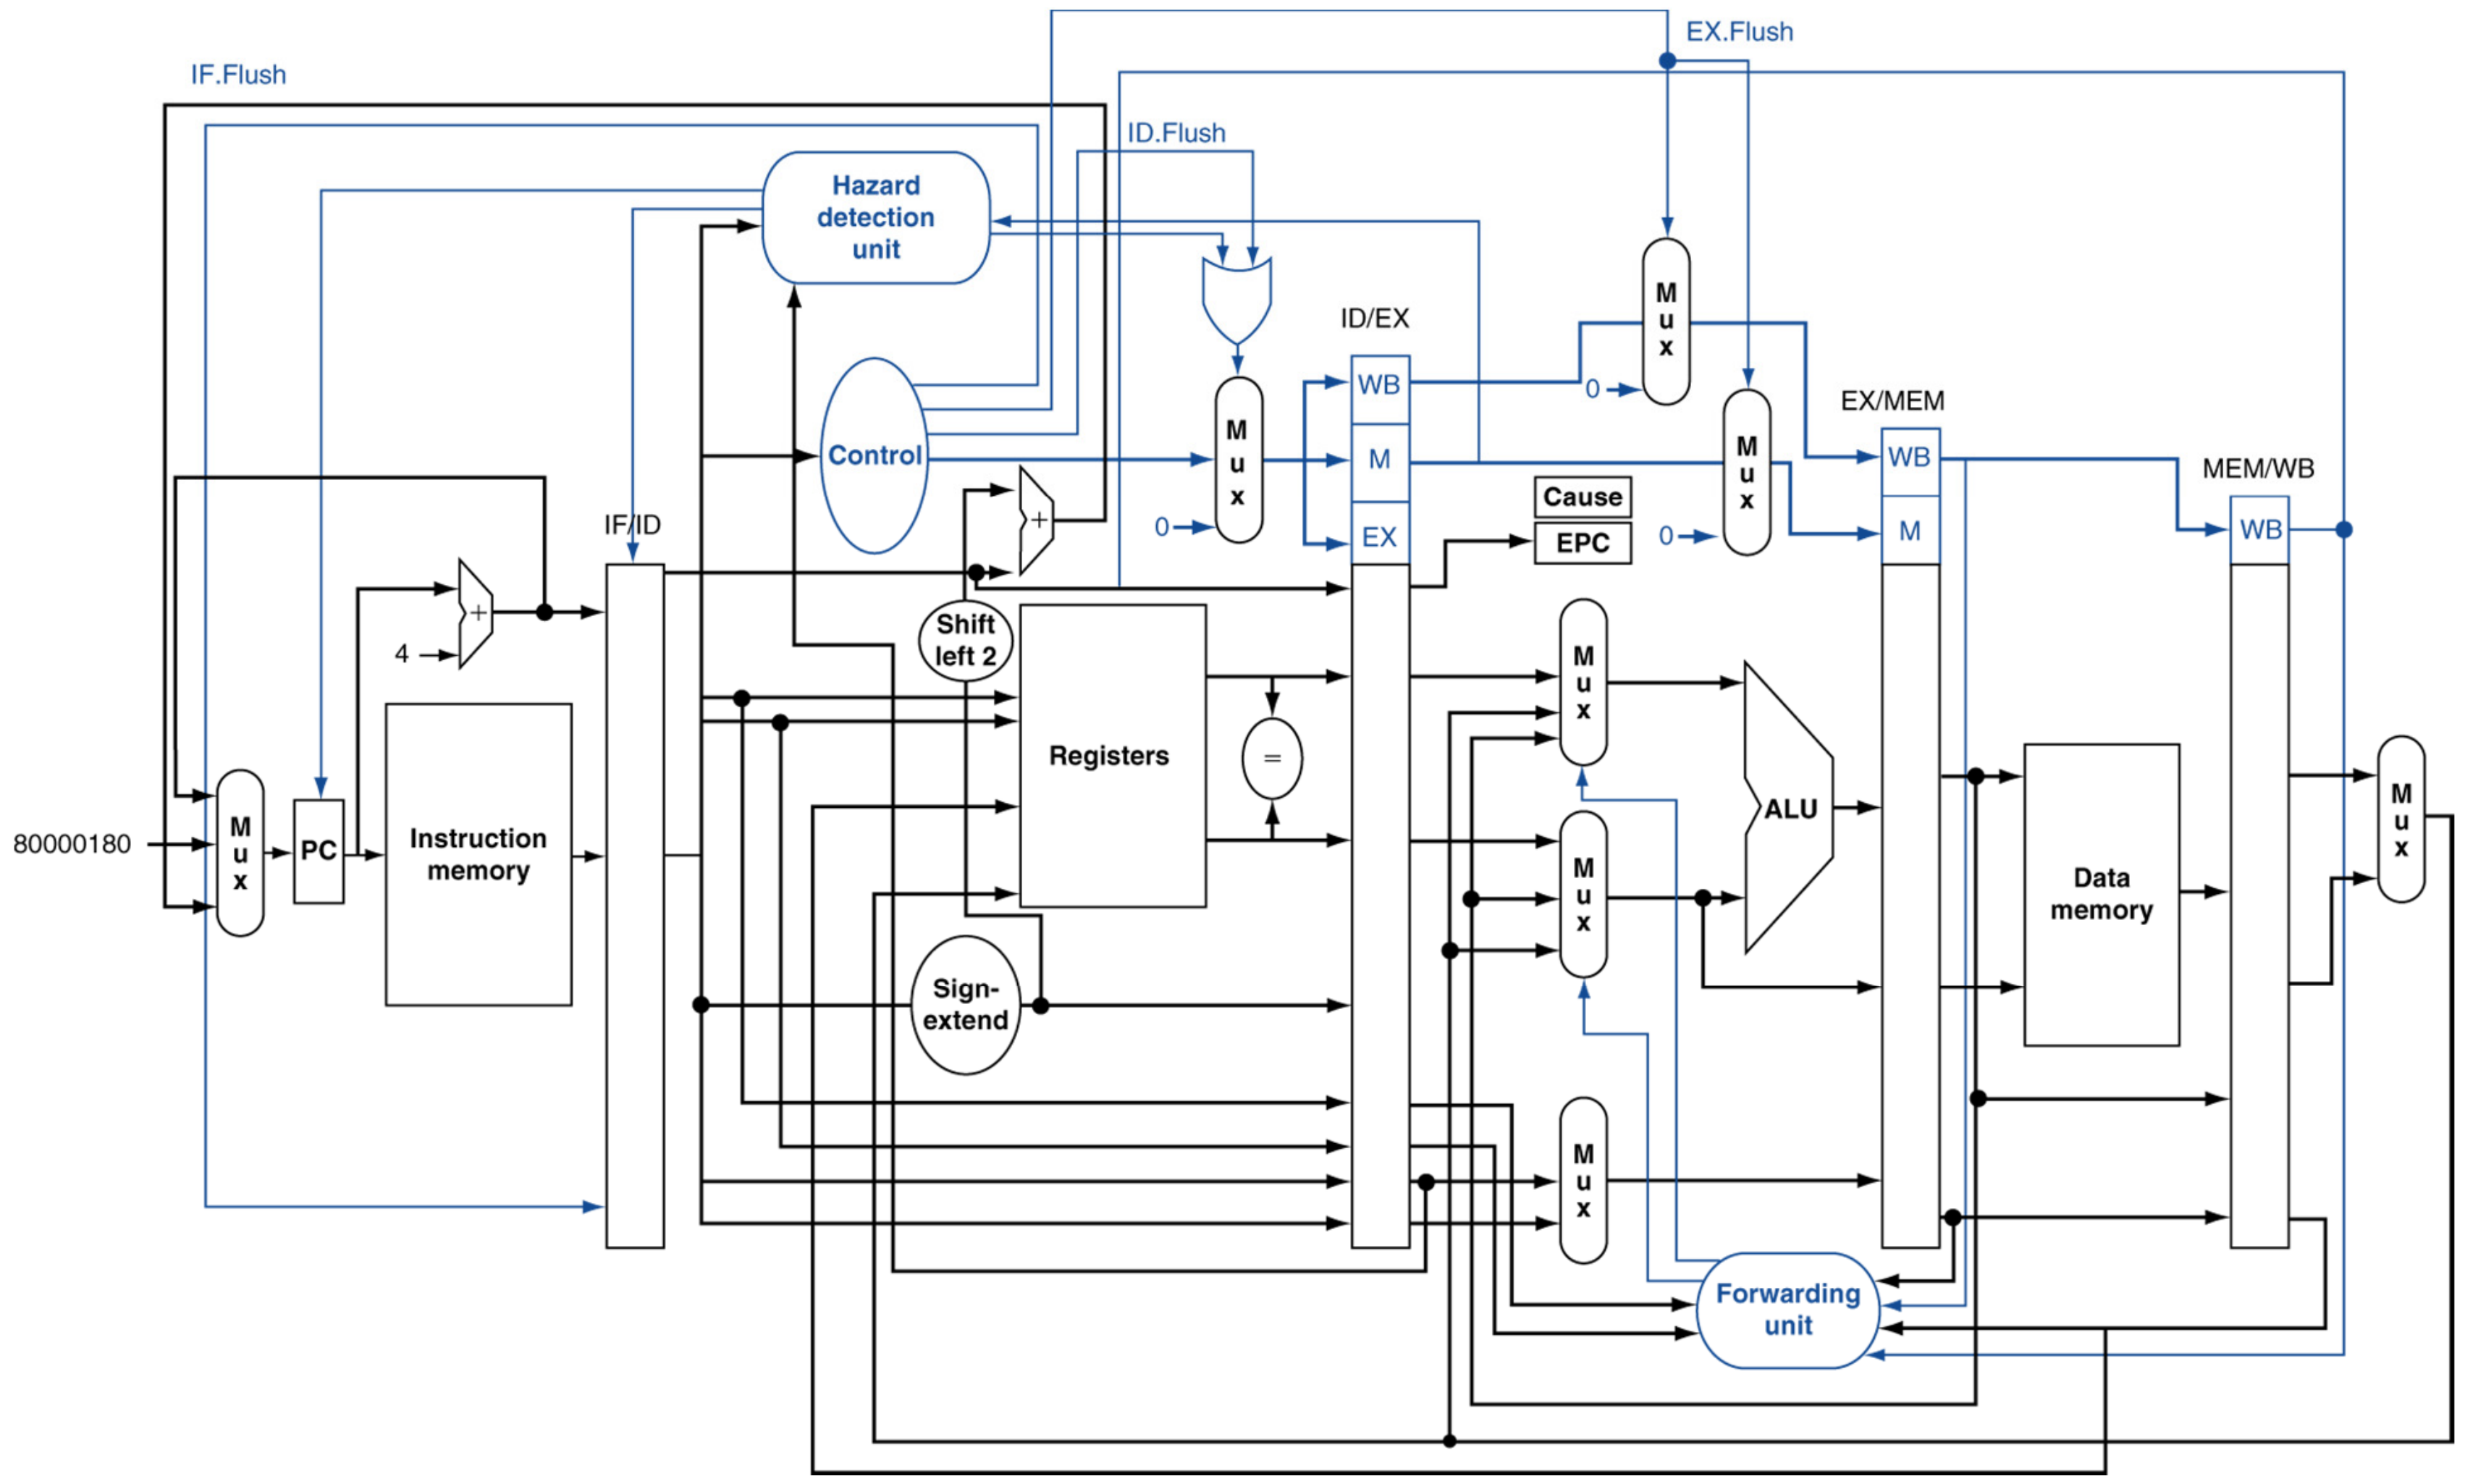

Exception Properties

- Restartable exceptions
  - Pipeline can flush the instruction
  - Handler executes, then returns to the instruction
    - Refetched and executed from scratch
- PC saved in EPC register
  - Identifies causing instruction
  - Actually PC + 4 is saved
    - Handler must adjust

Exception Example

- Exception on add in

```
40 sub   $11, $2, $4
44 and   $12, $2, $5
48 or    $13, $2, $6
4c add   $1,  $2, $1
50 slt   $15, $6, $7
54 lw    $16, 50($7)
…
```

- Handler

```
80000180     sw    $25, 1000($0)
80000184     sw    $26, 1004($0)
…
```

Exception Example

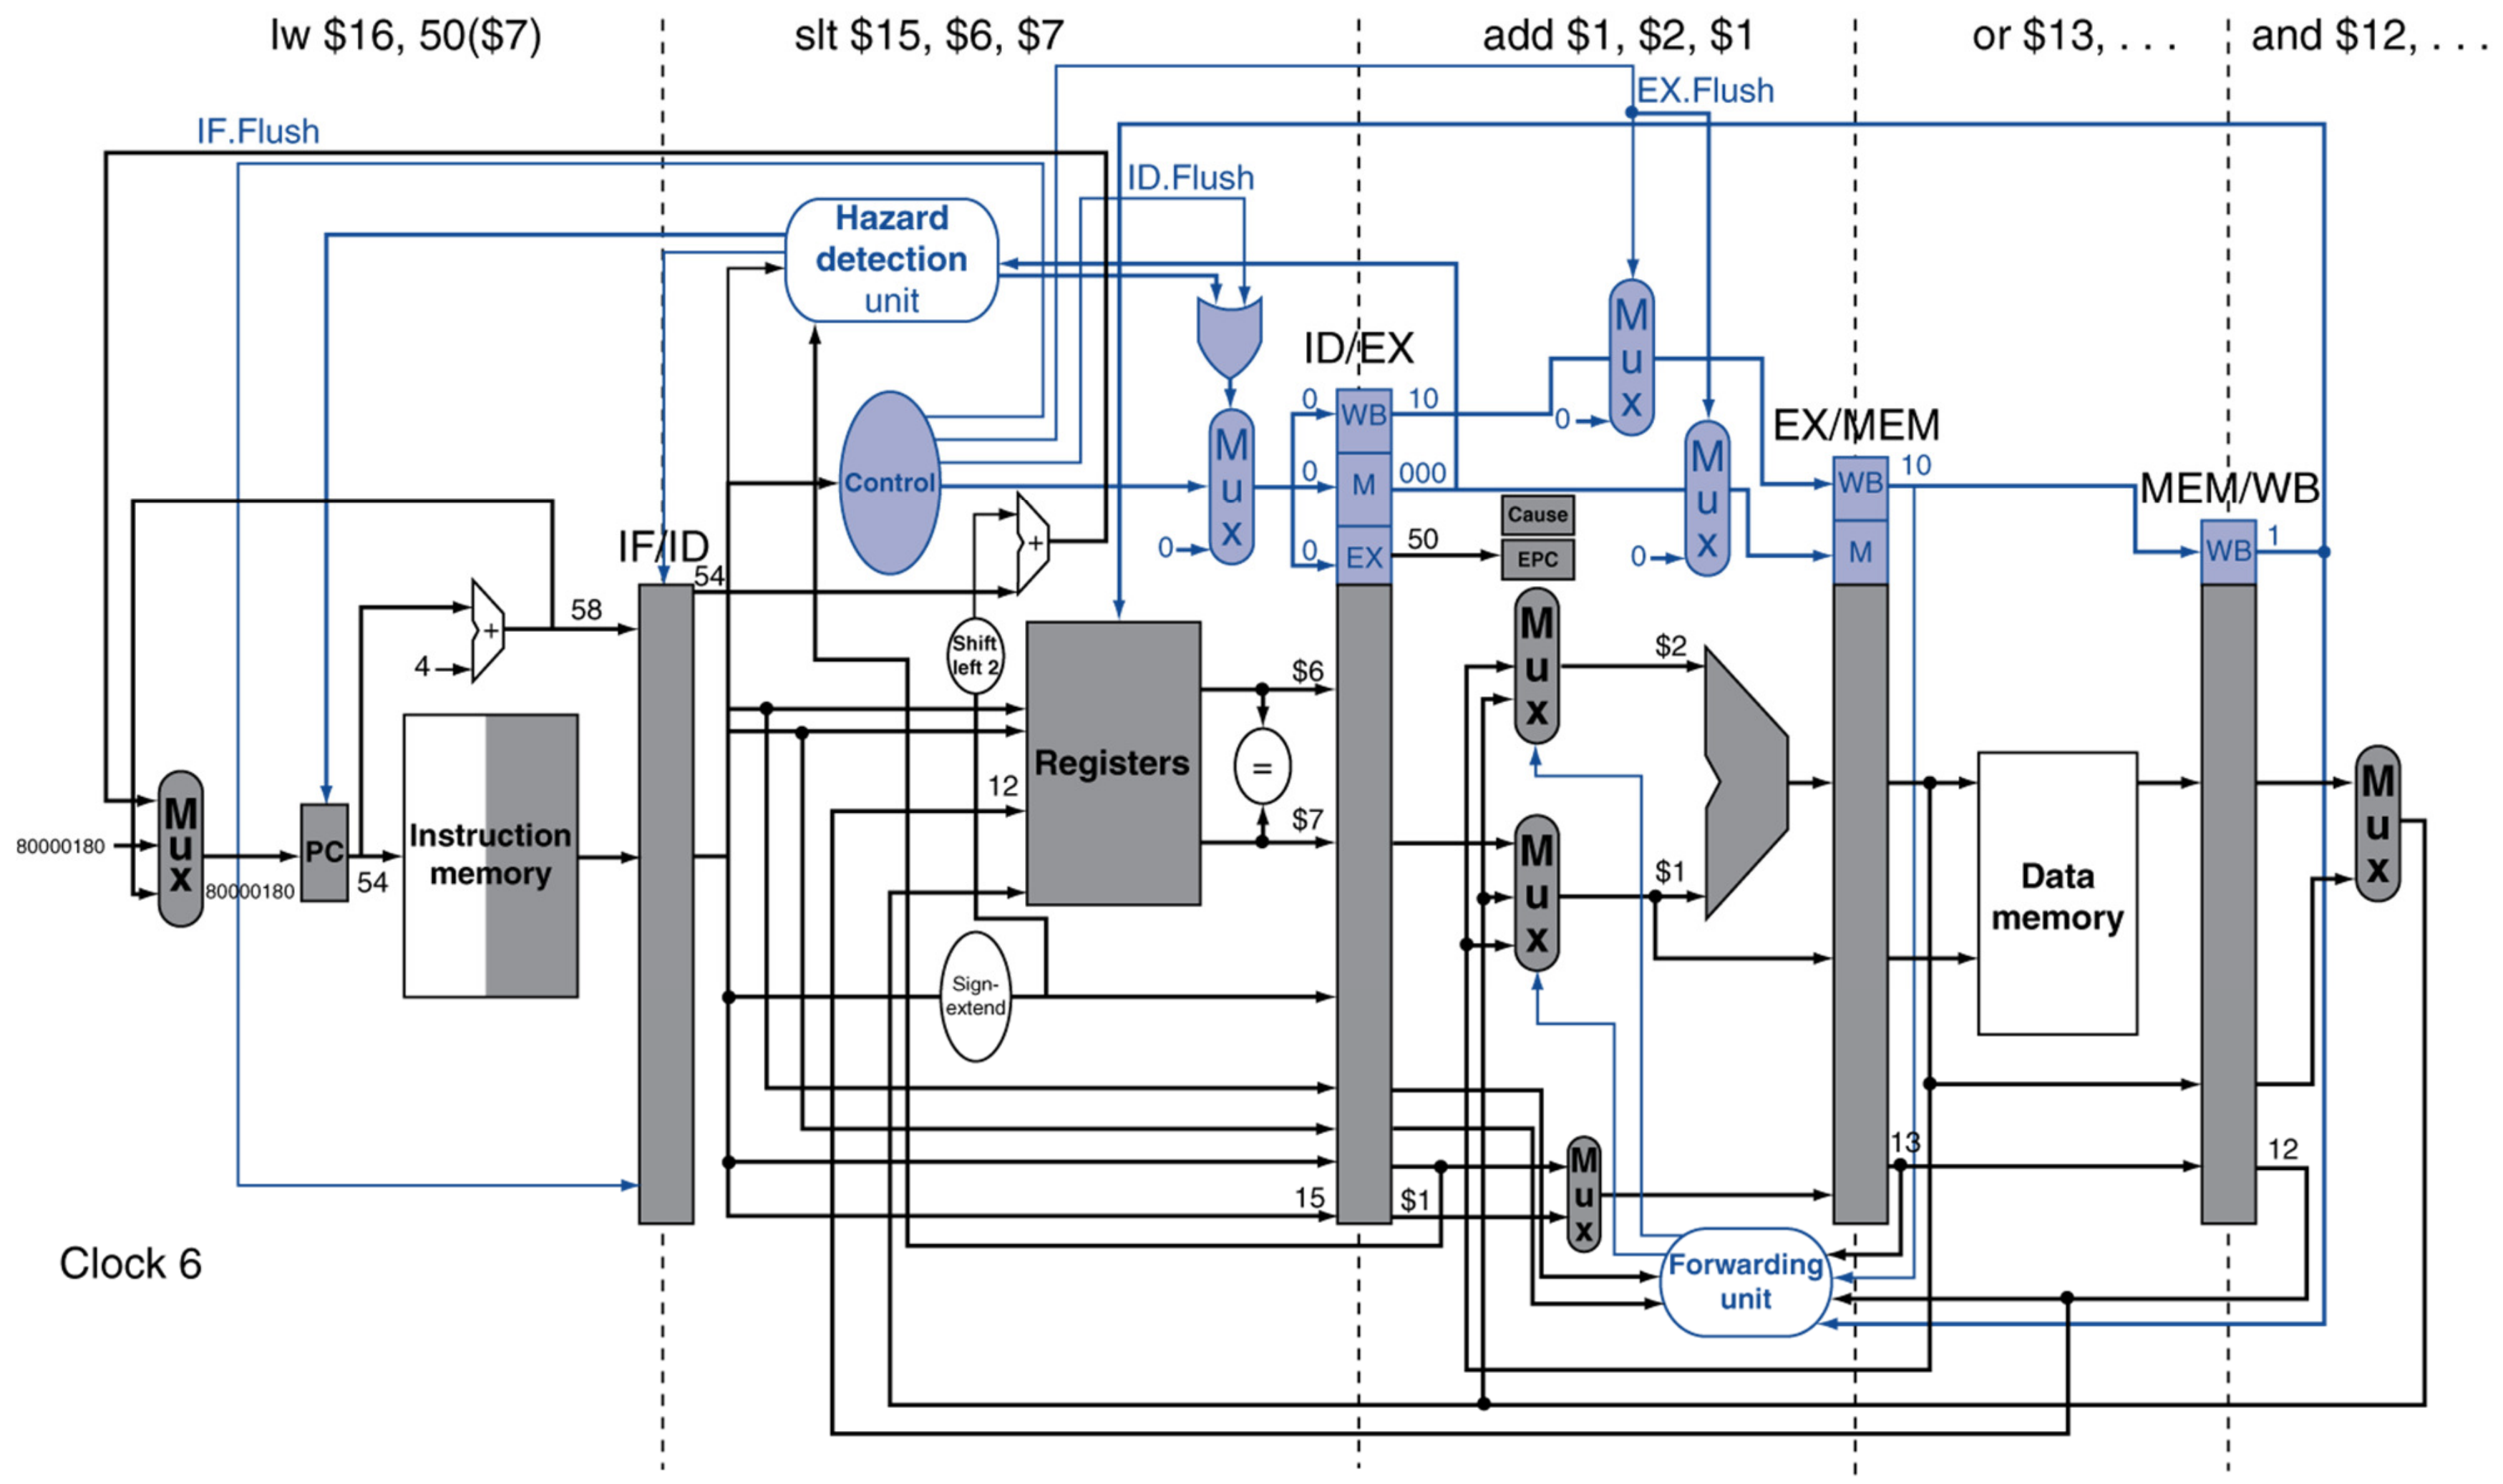

Clock 6

Exception Example

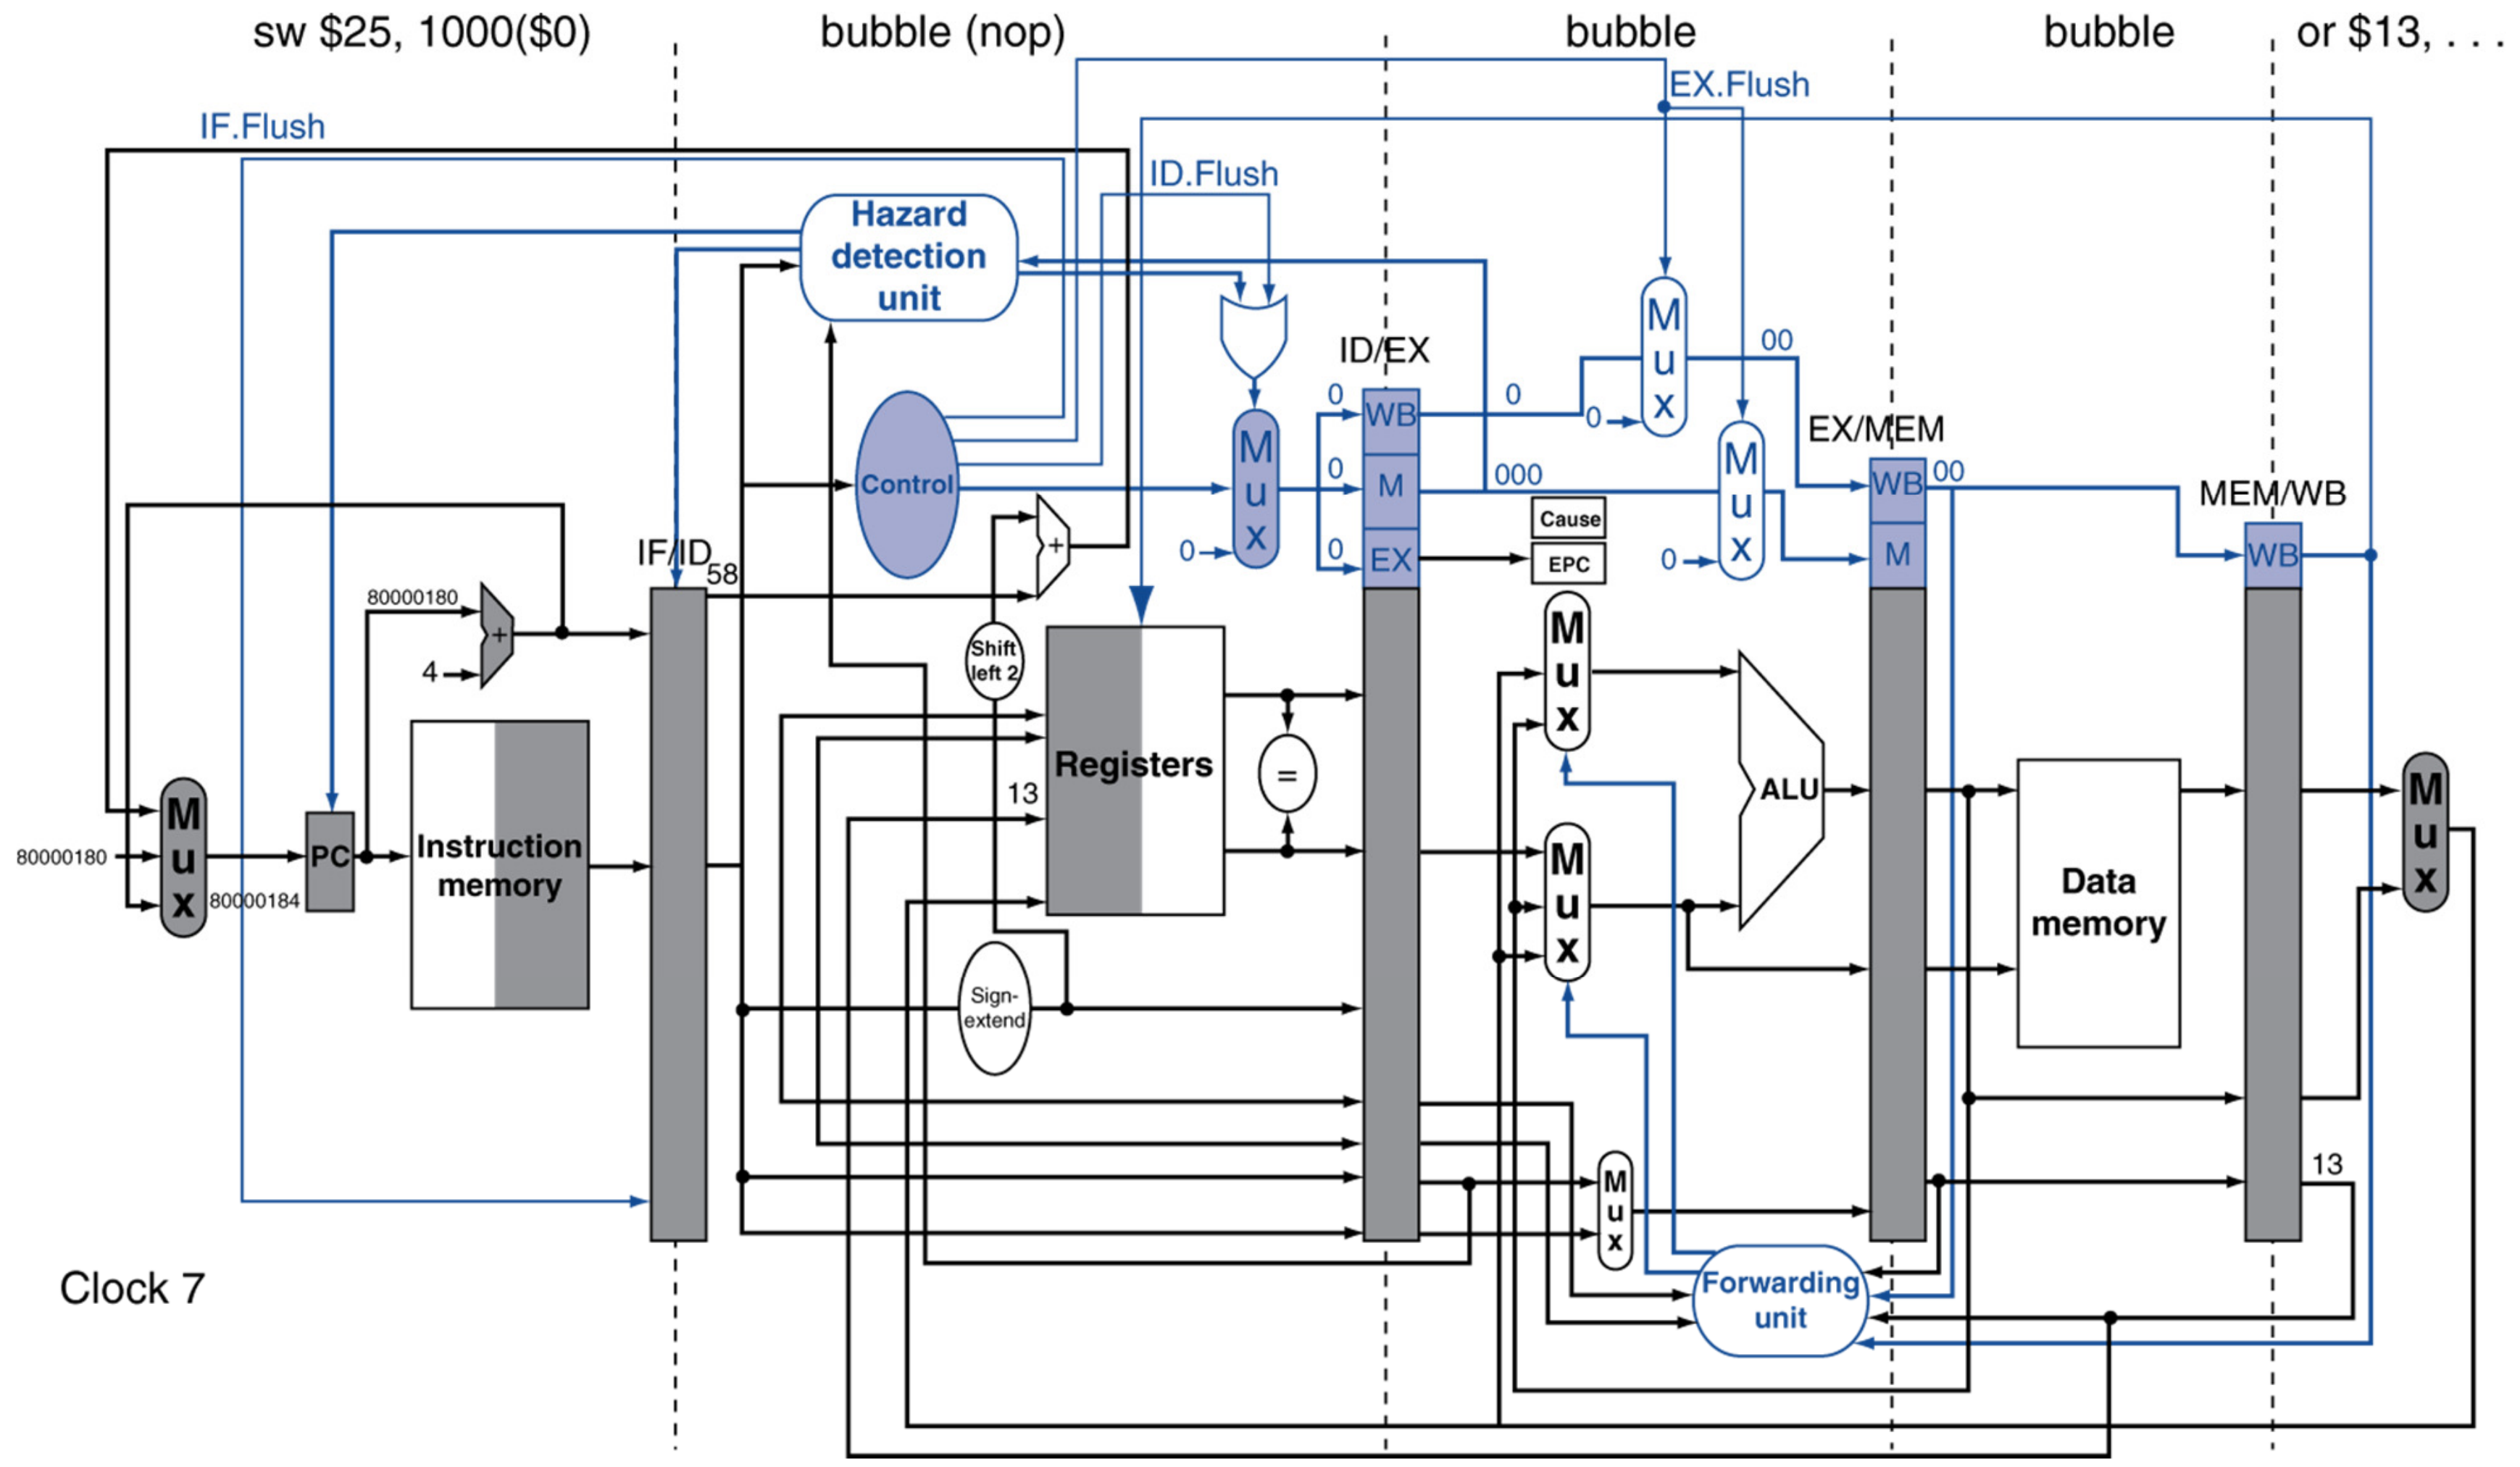

Instruction-Level Parallelism (ILP)

- Pipelining: executing multiple instructions in parallel
- To increase ILP
  - Deeper pipeline
    - Less work per stage ⇒ shorter clock cycle
  - Multiple issue
    - Replicate pipeline stages ⇒ multiple pipelines
    - Start multiple instructions per clock cycle
    - CPI < 1, so use Instructions Per Cycle (IPC)
    - E.g., 4GHz 4-way multiple-issue
      - 16 BIPS, peak CPI = 0.25, peak IPC = 4
    - But dependencies reduce this in practice

Multiple Issue

- Static multiple issue
  - Compiler groups instructions to be issued together
  - Packages them into “issue slots”
  - Compiler detects and avoids hazards
- Dynamic multiple issue
  - CPU examines instruction stream and chooses instructions to issue each cycle
  - Compiler can help by reordering instructions
  - CPU resolves hazards using advanced techniques at runtime

Speculation

- "Guess" what to do with an instruction
  - Start operation as soon as possible
  - Check whether guess was right
    - If so, complete the operation
    - If not, roll-back and do the right thing
- Common to static and dynamic multiple issue
- Examples
  - Speculate on branch outcome
    - Roll back if path taken is different
  - Speculate on load
    - Roll back if location is updated

Compiler/Hardware Speculation

- Compiler can reorder instructions
  - e.g., move load before branch
  - Can include “fix-up” instructions to recover from incorrect guess
- Hardware can look ahead for instructions to execute
  - Buffer results until it determines they are actually needed
  - Flush buffers on incorrect speculation

Speculation and Exceptions

- What if exception occurs on a speculatively executed instruction?
  - e.g., speculative load before null-pointer check
- Static speculation
  - Can add ISA support for deferring exceptions
- Dynamic speculation
  - Can buffer exceptions until instruction completion (which may not occur)

Static Multiple Issue

- Compiler groups instructions into “issue packets”
    - Group of instructions that can be issued on a single cycle
    - Determined by pipeline resources required
- Think of an issue packet as a very long instruction
    - Specifies multiple concurrent operations
    - $\Rightarrow$ Very Long Instruction Word (VLIW)

Scheduling Static Multiple Issue

- Compiler must remove some/all hazards
  - Reorder instructions into issue packets
  - No dependencies with a packet
  - Possibly some dependencies between packets
    - Varies between ISAs; compiler must know!
  - Pad with nop if necessary

MIPS with Static Dual Issue

- Two-issue packets
  - One ALU/branch instruction
  - One load/store instruction
  - 64-bit aligned
    - ALU/branch, then load/store
    - Pad an unused instruction with nop

Address	Instruction type	Pipeline Stages						
n	ALU/branch	IF	ID	EX	MEM	WB		
n + 4	Load/store	IF	ID	EX	MEM	WB		
n + 8	ALU/branch		IF	ID	EX	MEM	WB	
n + 12	Load/store		IF	ID	EX	MEM	WB	
n + 16	ALU/branch			IF	ID	EX	MEM	WB
n + 20	Load/store			IF	ID	EX	MEM	WB

MIPS with Static Dual Issue

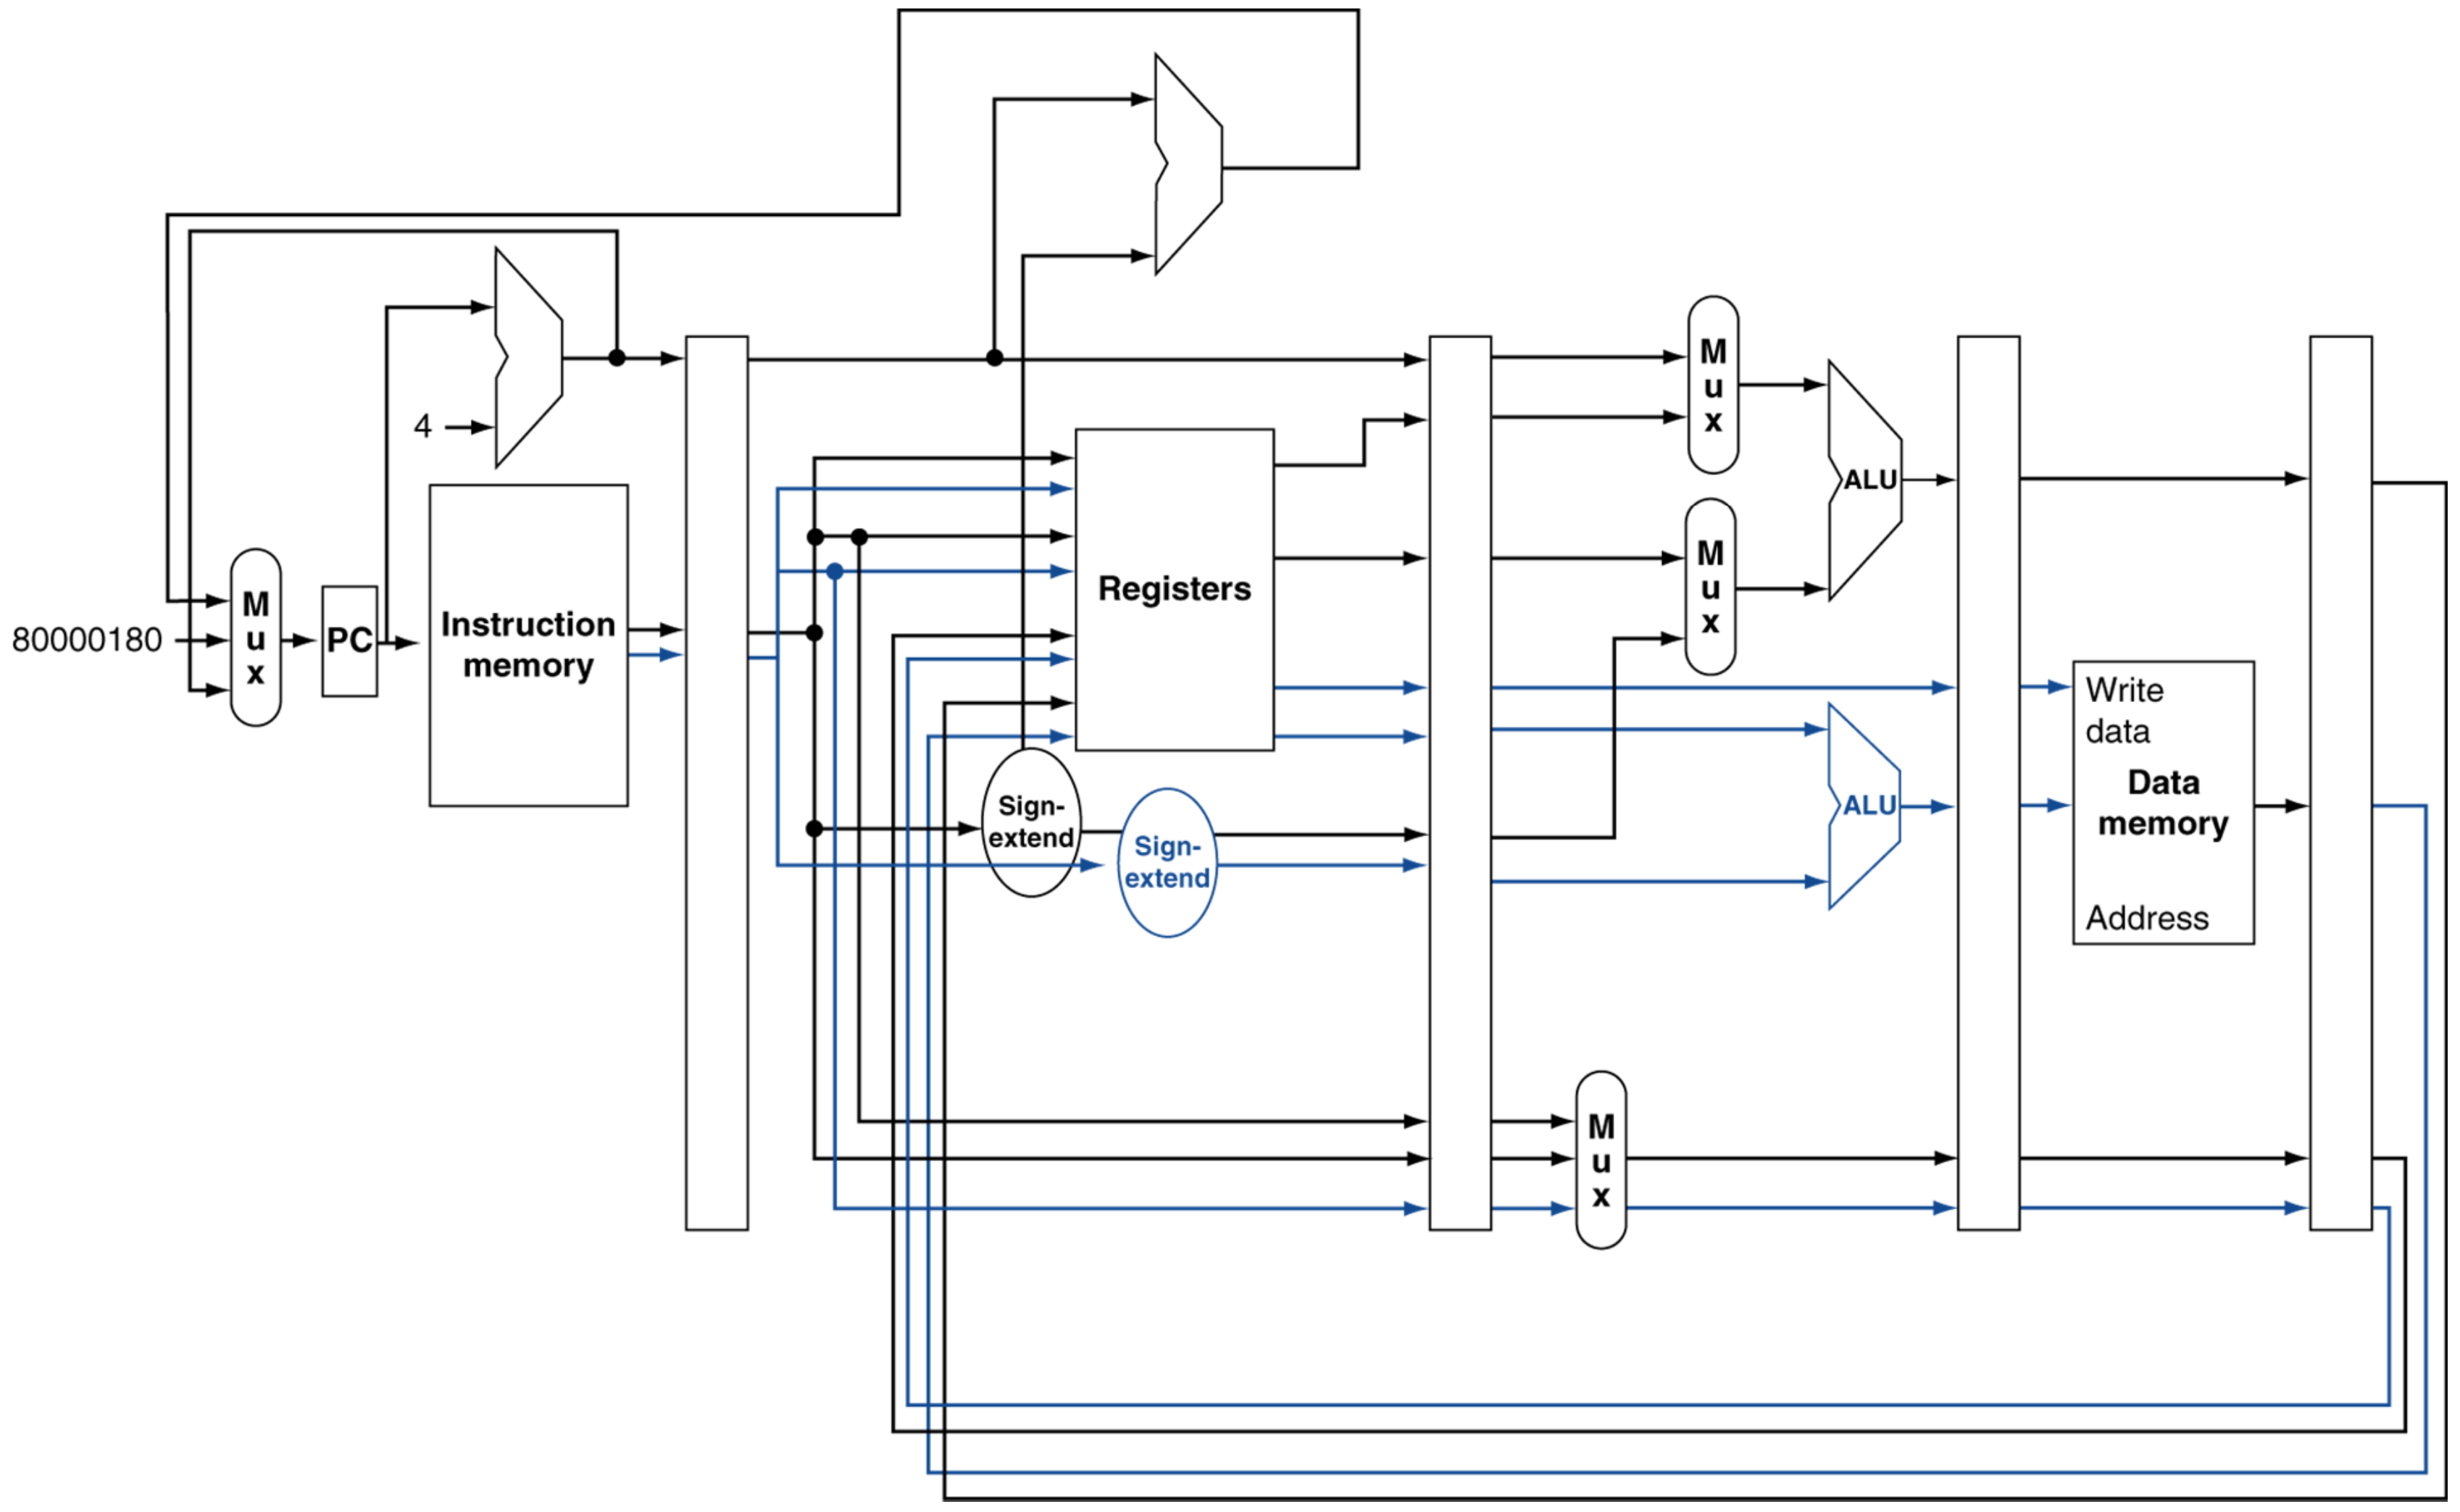

Hazards in the Dual-Issue MIPS

- More instructions executing in parallel
- EX data hazard
  - Forwarding avoided stalls with single-issue
  - Now can’t use ALU result in load/store in same packet

    -
      ```
      add  $t0, $s0, $s1
      load $s2, 0($t0)
      ```
    - Split into two packets, effectively a stall
- Load-use hazard
  - Still one cycle use latency, but now two instructions
- More aggressive scheduling required

Scheduling Example

- Schedule this for dual-issue MIPS

```
Loop: lw   $t0, 0($s1)        # $t0=array element
      addu $t0, $t0, $s2      # add scalar in $s2
      sw   $t0, 0($s1)        # store result
      addi $s1, $s1,-4        # decrement pointer
      bne  $s1, $zero, Loop # branch $s1!=0
```

	ALU/branch	Load/store	cycle
`Loop:`	nop	`lw   $t0, 0($s1)`	1
	`addi $s1, $s1,-4`	nop	2
	`addu $t0, $t0, $s2`	nop	3
	`bne  $s1, $zero, Loop`	`sw   $t0, 4($s1)`	4

- IPC = 5/4 = 1.25 (c.f. peak IPC = 2)

Loop Unrolling

- Replicate loop body to expose more parallelism
  - Reduces loop-control overhead
- Use different registers per replication
  - Called “register renaming”
  - Avoid loop-carried “anti-dependencies”
    - Store followed by a load of the same register
    - Aka “name dependence”
      - Reuse of a register name

Loop Unrolling Example

	ALU/branch	Load/store	cycle
`Loop:`	`addi $s1, $s1,-16`	`lw $t0, 0($s1)`	1
	`nop`	`lw $t1, 12($s1)`	2
	`addu $t0, $t0, $s2`	`lw $t2, 8($s1)`	3
	`addu $t1, $t1, $s2`	`lw $t3, 4($s1)`	4
	`addu $t2, $t2, $s2`	`sw $t0, 16($s1)`	5
	`addu $t3, $t3, $s2`	`sw $t1, 12($s1)`	6
	`nop`	`sw $t2, 8($s1)`	7
	`bne $s1, $zero, Loop`	`sw $t3, 4($s1)`	8

- IPC = 14/8 = 1.75
  - Closer to 2, but at cost of registers and code size

Dynamic Multiple Issue

- “Superscalar” processors
- CPU decides whether to issue 0, 1, 2, … each cycle
  - Avoiding structural and data hazards
- Avoids the need for compiler scheduling
  - Though it may still help
  - Code semantics ensured by the CPU

Dynamic Pipeline Scheduling

- Allow the CPU to execute instructions out of order to avoid stalls
  - But commit result to registers in order
- Example

```
lw     $t0, 20($s2)
addu   $t1, $t0, $t2
sub    $s4, $s4, $t3
slti   $t5, $s4, 20
```

  - Can start `sub` while `addu` is waiting for lw

Dynamically Scheduled CPU

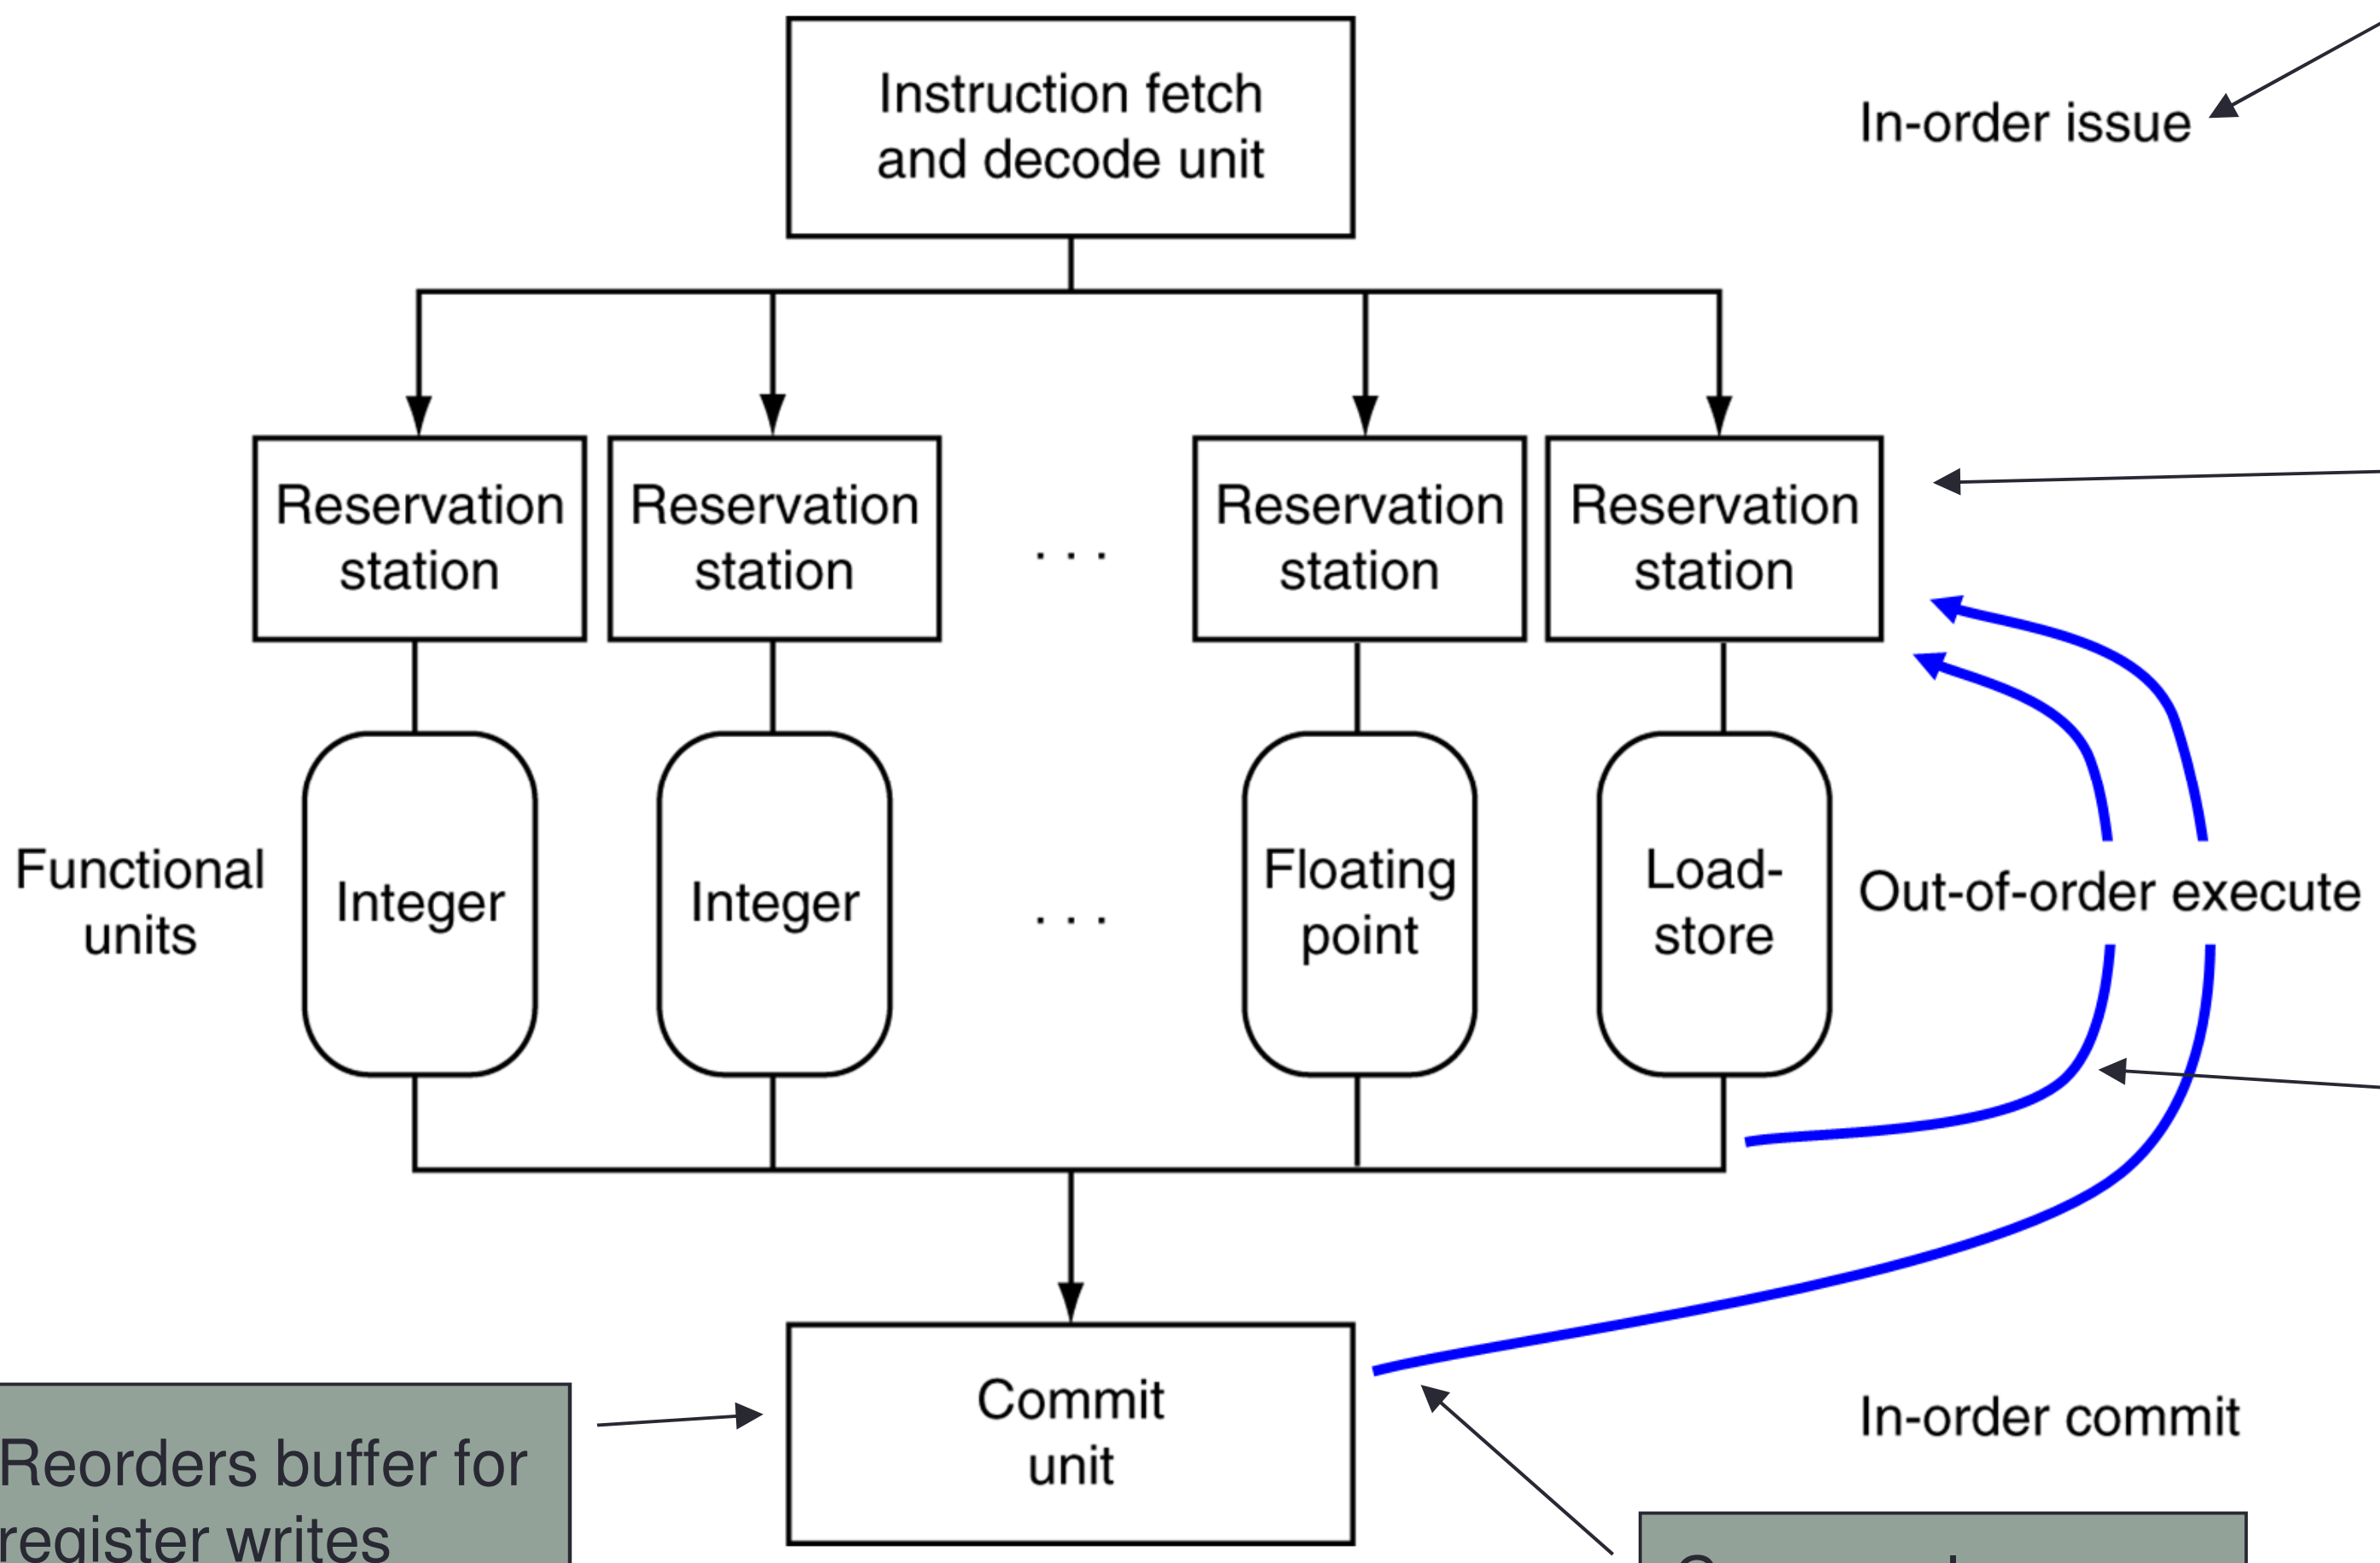

Preserves dependencies

Hold pending operands

Results also sent to any waiting reservation stations

Reorders buffer for register writes

Can supply operands for issued instructions

Register Renaming

- Reservation stations and reorder buffer effectively provide register renaming
- On instruction issue to reservation station
    - If operand is available in register file or reorder buffer
        - Copied to reservation station
        - No longer required in the register; can be overwritten
    - If operand is not yet available
        - It will be provided to the reservation station by a function unit
        - Register update may not be required

Speculation

- Predict branch and continue issuing
  - Don’t commit until branch outcome determined
- Load speculation
  - Avoid load and cache miss delay
    - Predict the effective address
    - Predict loaded value
    - Load before completing outstanding stores
    - Bypass stored values to load unit
  - Don’t commit load until speculation cleared

Why Do Dynamic Scheduling?

- Why not just let the compiler schedule code?
- Not all stalls are predicable
  - e.g., cache misses
- Can’t always schedule around branches
  - Branch outcome is dynamically determined
- Different implementations of an ISA have different latencies and hazards

Does Multiple Issue Work?

- Yes, but not as much as we’d like
- Programs have real dependencies that limit ILP
- Some dependencies are hard to eliminate
  - e.g., pointer aliasing
- Some parallelism is hard to expose
  - Limited window size during instruction issue
- Memory delays and limited bandwidth
  - Hard to keep pipelines full
- Speculation can help if done well

The Opteron X4 Microarchitecture

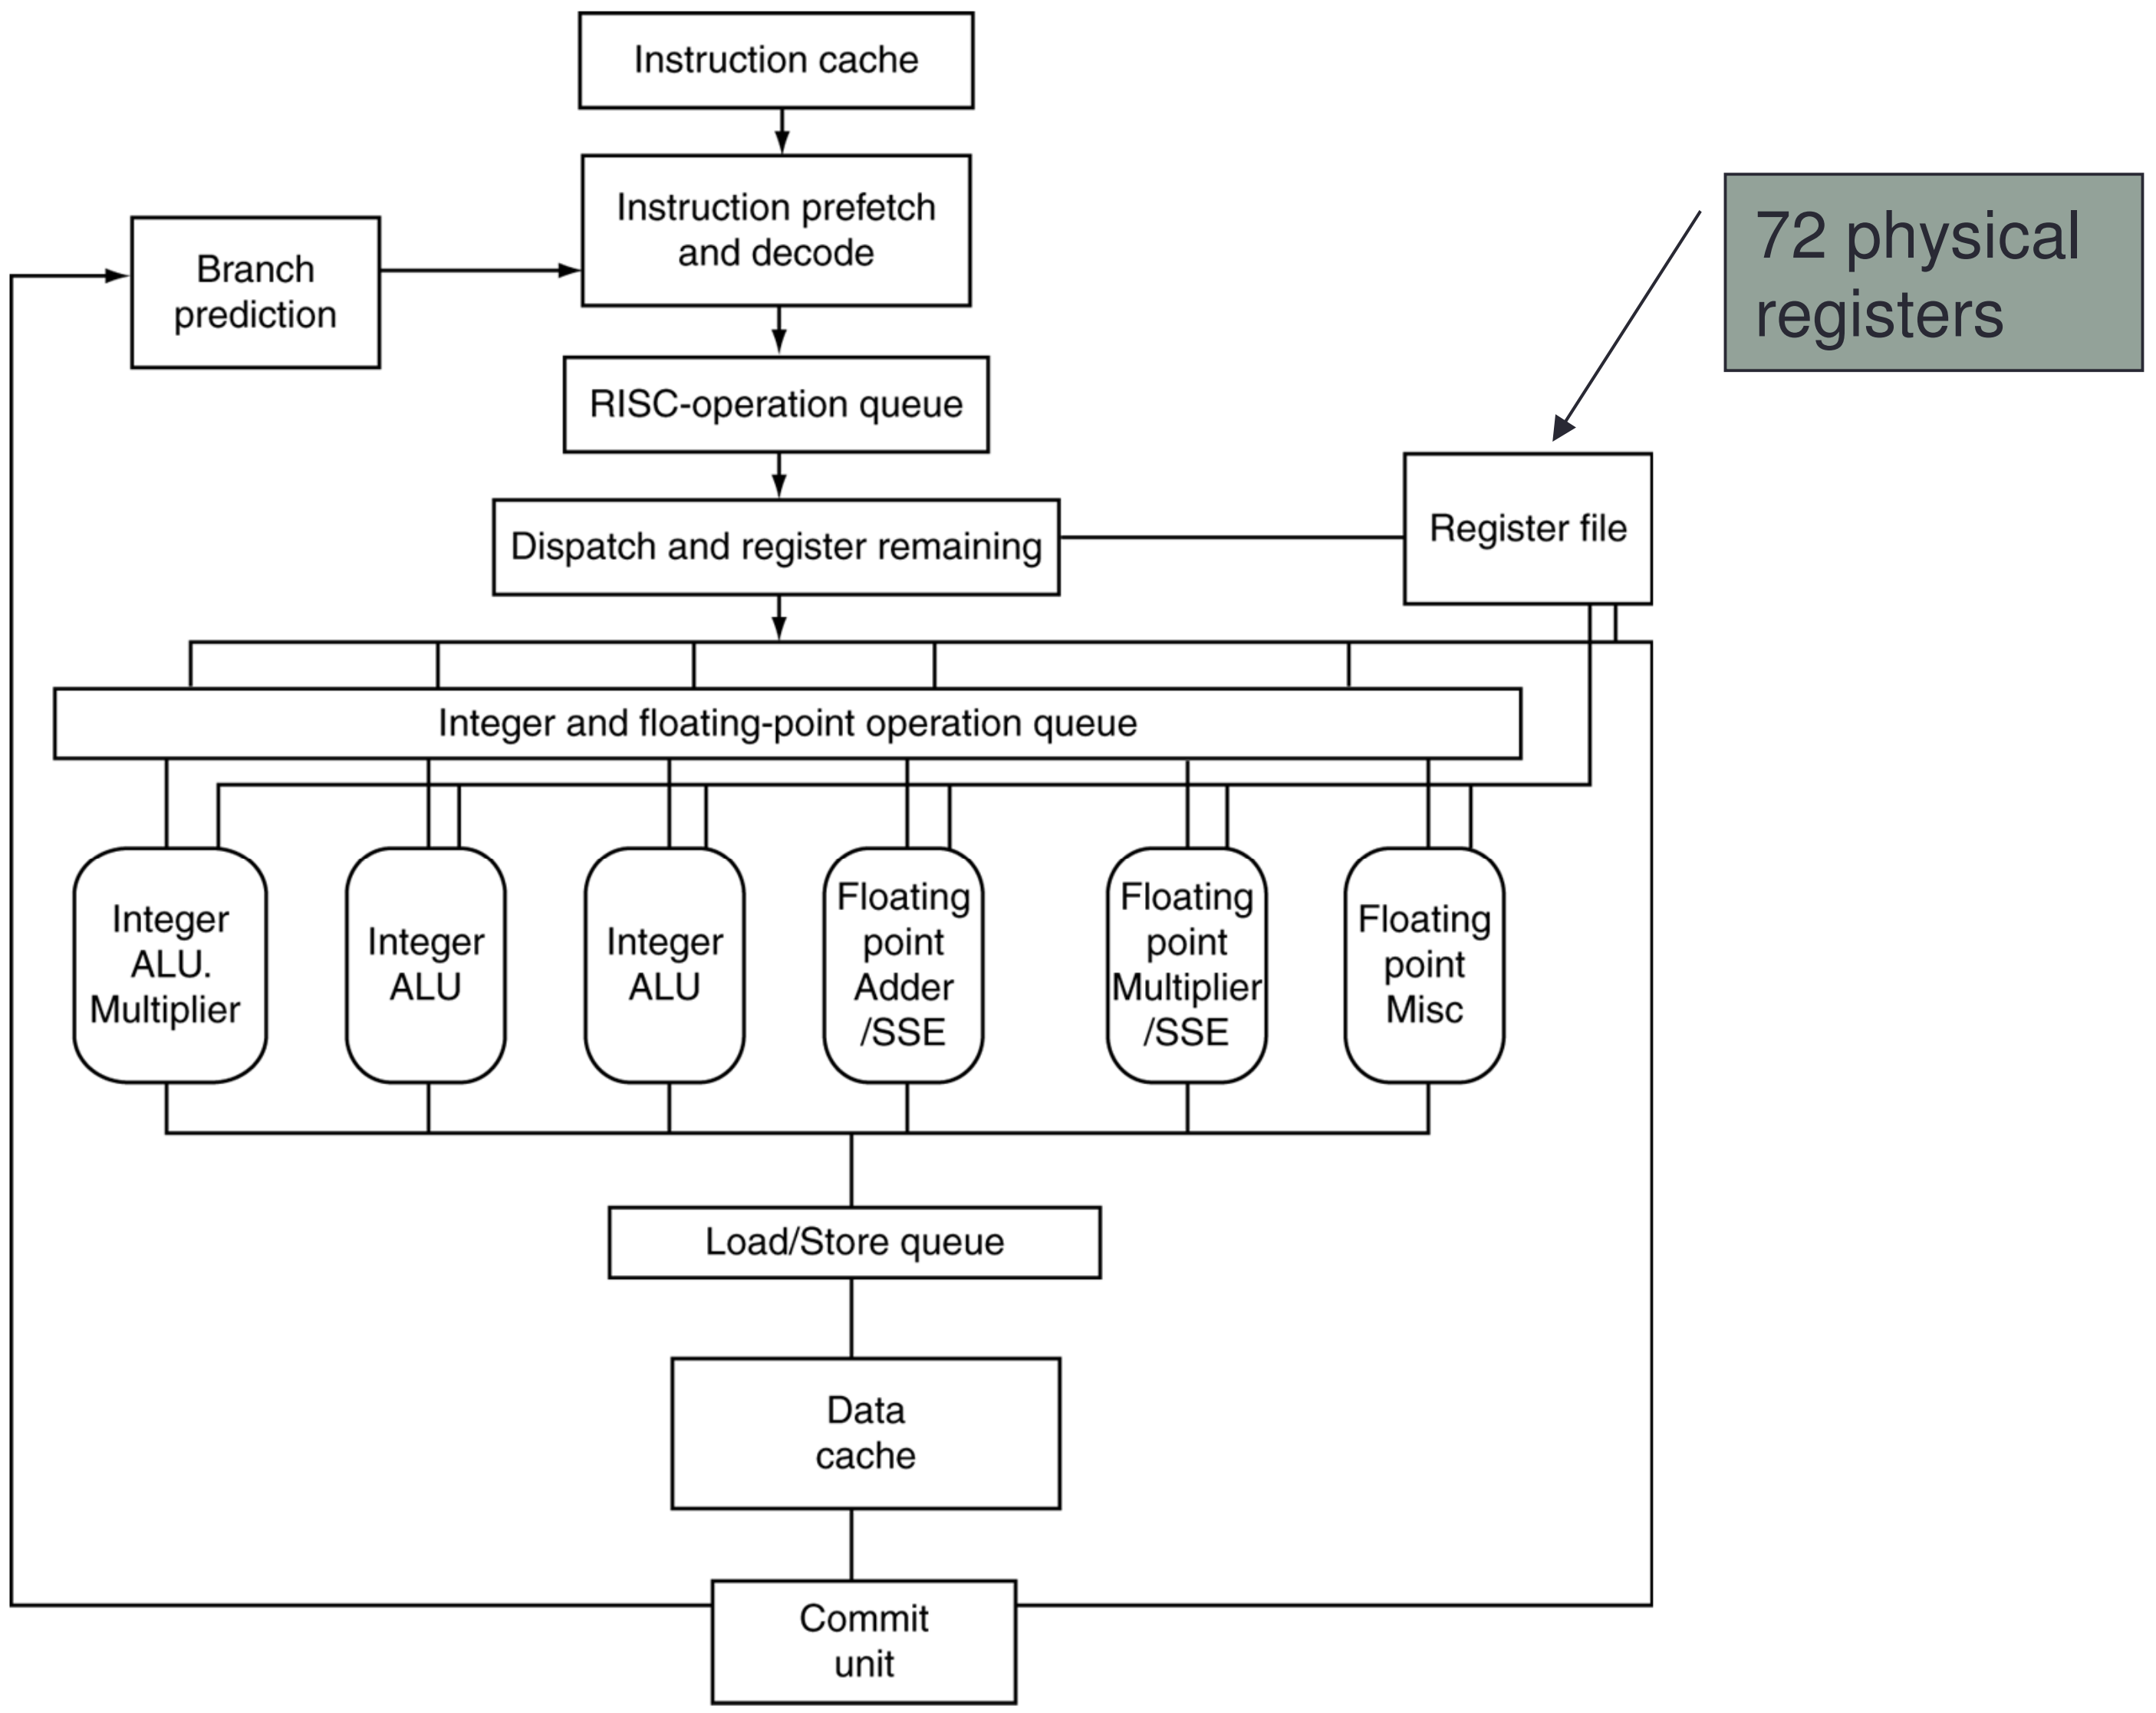

The Opteron X4 Pipeline Flow

- For integer operations

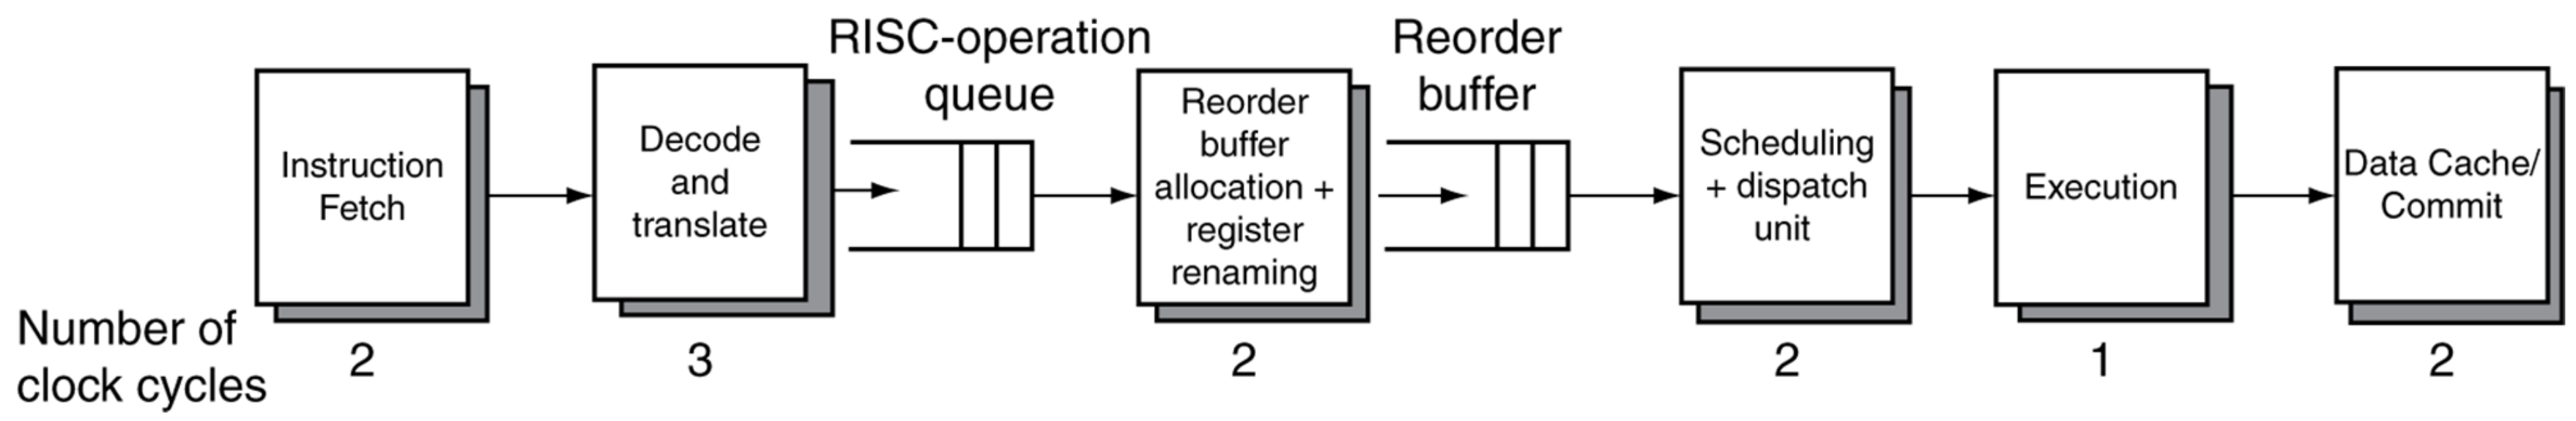

  - FP is 5 stages longer
  - Up to 106 RISC-ops in progress
- Bottlenecks
  - Complex instructions with long dependencies
  - Branch mispredictions
  - Memory access delays

Concluding Remarks

- ISA influences design of datapath and control
- Datapath and control influence design of ISA
- Pipelining improves instruction throughput using parallelism
  - More instructions completed per second
  - Latency for each instruction not reduced
- Hazards: structural, data, control
- Multiple issue and dynamic scheduling (ILP)
  - Dependencies limit achievable parallelism
  - Complexity leads to the power wall