

Martin® Tornado Air Cannon




4-INCH VALVE


The [Martin® Tornado Air Cannon](#) produces better material flow with greater force, faster cycling, and improved safety. The Martin® Tornado Air Cannon fires when the exhaust valve opens in response to a positive surge of air sent by a tripped solenoid valve. This positive-acting valve amplifies the discharge force, up to 20% more force than a standard Martin® Extra High Velocity Air Cannon of the same size.

PERFORMANCE DATA

Discharge Time

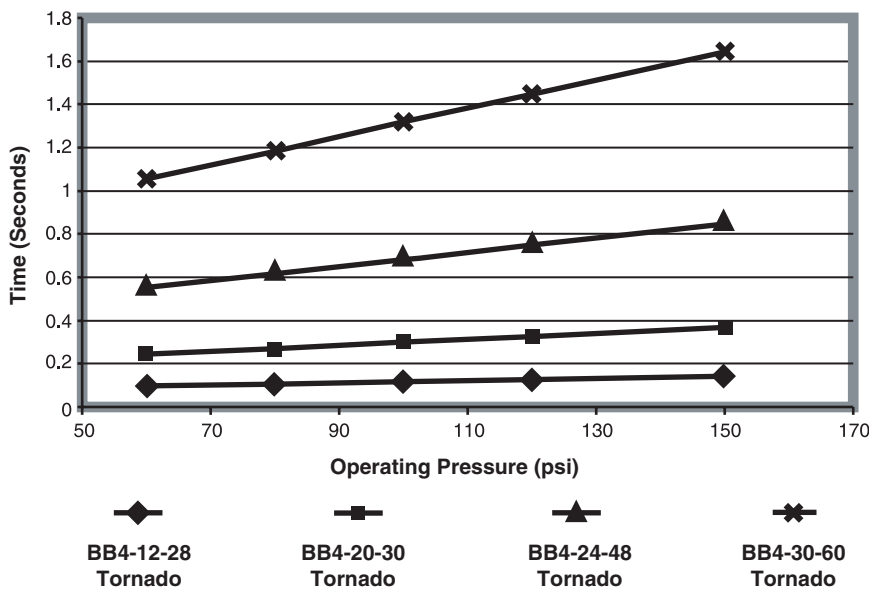

Martin® Tornado Exhaust Valve

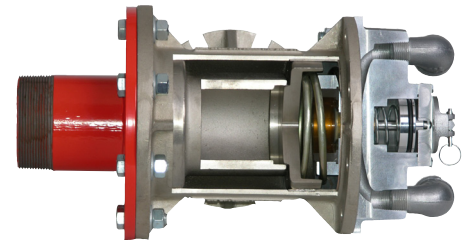


Unit shown as cutaway to show internal parts.


BENEFITS

- Increased Safety
- Increased Force Output
- Suitable for High Temperatures
- Easy Installation and Maintenance
- Cycle Guarantee
- Faster Fill Times

Tank Fill Time*

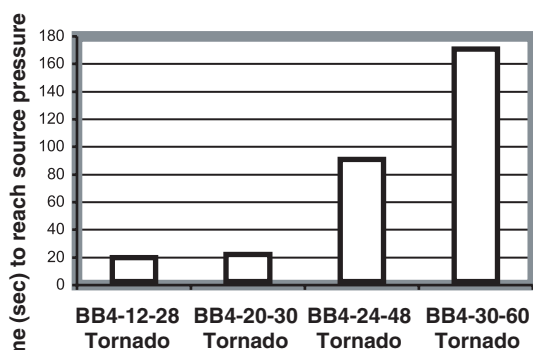

Noise Level

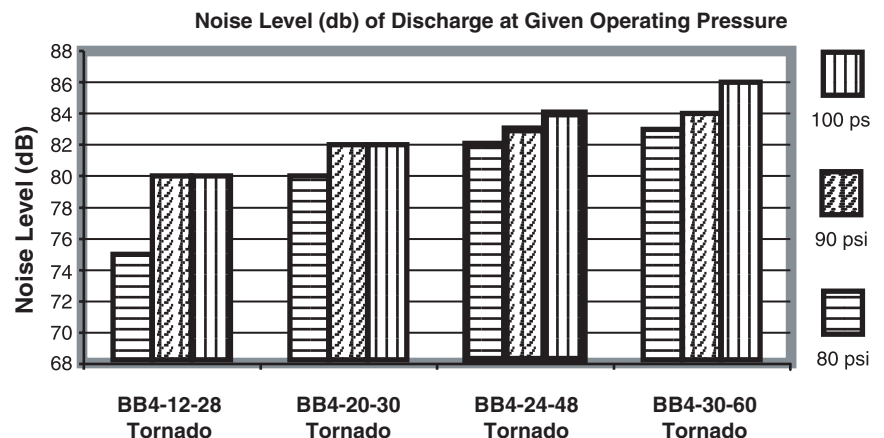


* Data based on laboratory testing. Fill times may vary depending on air supply characteristics.

TECHNICAL DATA SHEET

DIMENSIONS

NPT—National Pipe Thread

Model	Assembly P/N	Dimensions						Ship WT. lbs (kg)	
		A		B		C			
BB4-12-28	37798-1228	12	(305)	28.00	(711)	41.65	(1058)	113	(51.25)
BB4-20-30	37798-2030	20	(508)	29.59	(762)	43.24	(1098)	151	(68.5)
BB4-24-48	37798-2448	24	(610)	48.00	(1219)	61.65	(1566)	211	(95.7)
BB4-30-60	37798-3060	30	(762)	60.00	(1524)	73.65	(1871)	312	(141.5)

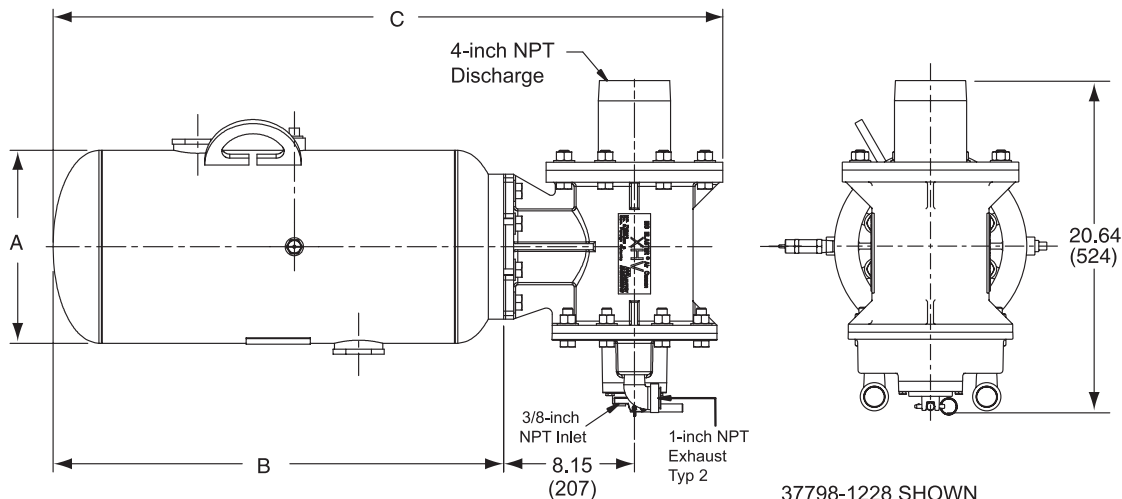

37798-1228 SHOWN

AIR VOLUME IN FT³ (LITERS) FREE AIR

Air Pressure PSI	1228 ft ³ (L)	2030 ft ³ (L)	2448 ft ³ (L)	3060 ft ³ (L)
0	1.7 (47)	4.8 (135)	11.2 (319)	22.0 (622)
40	6.2 (174)	17.7 (501)	41.9 (1185)	81.8 (2315)
50	7.3 (206)	20.9 (593)	49.5 (1402)	96.7 (2738)
60	8.4 (238)	24.2 (684)	57.2 (1619)	111.6 (3161)
70	9.5 (270)	27.4 (776)	64.8 (1835)	126.6 (3585)
75	10.1 (286)	29.0 (822)	68.6 (2052)	141.5 (4008)
85	11.2 (317)	32.2 (913)	76.3 (2160)	149.0 (4219)
90	11.8 (333)	33.9 (959)	80.1 (2269)	156.5 (4431)
95	12.3 (349)	35.5 (1005)	83.9 (2377)	164.0 (4643)
100	12.9 (365)	37.1 (1051)	87.8 (2485)	171.4 (4854)
110	14.0 (397)	40.3 (1142)	95.4 (2702)	186.4 (5277)
120	15.1 (429)	43.6 (1234)	103.1 (2919)	201.3 (5701)

NOTES

Tanks for Martin® Air Cannons supplied by Martin Engineering are manufactured to ASME Code Rules, Section VIII, Division 1. Tanks are National Board registered and pressure vessel quality (PVQ).

For further information, contact Martin Engineering at
1-800-544-2947 or visit our website at www.martin-eng.com.



Martin Engineering USA
One Martin Place
Neponset, IL 61345-9766 USA
800 544 2947 or 309 852 2384
Fax 800 814 1553
www.martin-eng.com

Subject to change without prior notice.
Quality Management System Certified by DNV - ISO 9001

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2008 =**

Problem Solved™

Form No. L3705-06/12
© Martin Engineering Company 2006, 2012