

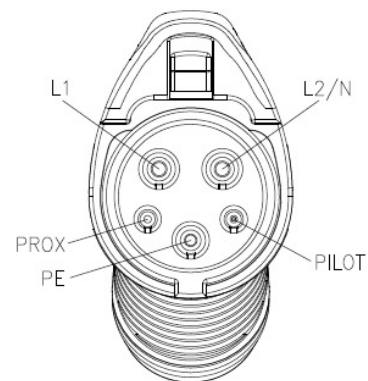



SAE J1772 (Type 1) AC Charging Cable

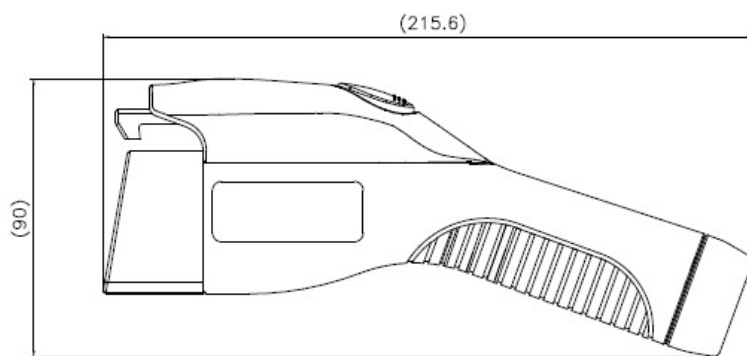

PRODUCT DEFINITION		
Charging Standard	SAE: SAE J1772 IEC: IEC 62196-2, Type 1	
Approval	UR / cUR (UL recognized component) Test basis: UL 2251, CSA C22.2 No. 282	
DIMENSIONS: CHARGING CONNECTOR		
Width	50.4 mm	
Height	90 mm	
Depth	215.6 mm	
Cable Length	On Request	
AMBIENT CONDITIONS		
Ambient Temperature (Operation)	-40°C to +50°C	
Ambient Temperature (Storage / Transport)	-40°C to +80°C	
Max. Altitude	5,000 m (above sea level)	
Degree of Protection (Unmated)	IP67 / 3S and above	
ELECTRICAL PROPERTIES		
Number of Phases	1	
Rated Voltage for Power Contacts	250V AC	
Rated Current for Power Contacts	32A	48A
Maximum Charging Power	8 kW	12 kW
Number of Power Contacts	3 (L1, N, PE)	
Rated Voltage for Signal Contacts	30V AC	
Rated Current for Signal Contacts	2A	
Number of Signal Contacts	2 (CP, PP)	
Note on the Connection Method	Crimp Termination (cannot be disconnected)	
Resistor Coding (between PE and CS)	480 Ω (lever operated) 150 Ω (lever not operated)	
MECHANICAL PROPERTIES		
Mating Cycles	> 10,000	
Insertion Force	< 75 N	
Withdrawal	< 75 N	



R1: 330 Ohm
R2: 150 Ohm



MATERIAL		DESIGN		
Material Housing / Handle Area	Plastic	Housing / Handle Area Colour	Black	
Material Mating Face	Plastic	Mating Face / Locking Lever Colour	Black	
Material Protective Cap	Soft Plastic	Protective Cap Colour	Black	
Flammability Rating	V-0	Housing with Customer Logo	On Request	
Material Contacts	Cu-Alloy			
Plating	Silver Plating			
CABLE				
AMPERAGE	APPROVAL	CABLE STRUCTURE	CABLE O.D.	PHASE
32A	UL Recognised	EVC 3 x 10 AWG + 1 x 22 AWG	12.0 mm	1 Phase
	UL Listed	EVE 3 x 10 AWG + 1 x 22 AWG	15.8 mm	
48A	UL Recognised	EVC 2 x 8 AWG + 1 x 10 AWG + 1 x 22 AWG	14.5 mm	
** Set Approval is required for UL Recognised				
CABLE RESISTANCE AT 20°C				
8 AWG	10 AWG	14 AWG	22 AWG	
≤ 2.23 Ω/km	≤ 3.51 Ω/km	≤ 8.88 Ω/km	≤ 56.8 Ω/km	
Cable Standard	UL 2263			
Type of Conductor	Straight (or more type on request)			
Outer Sheath Material	TPE Compound			
Outer Sheath Colour	On Request			
ENVIRONMENTAL PRODUCT COMPLIANCE				
EU REACH	(EC) 1907 / 2006, SVHC Compliant			
China RoHS	Compliant			
EU RoHS	2011 / 65 / EU			

Contact us at sales@volex.com
for assistance in finding the right solution for your needs.