



a Paired supply margins

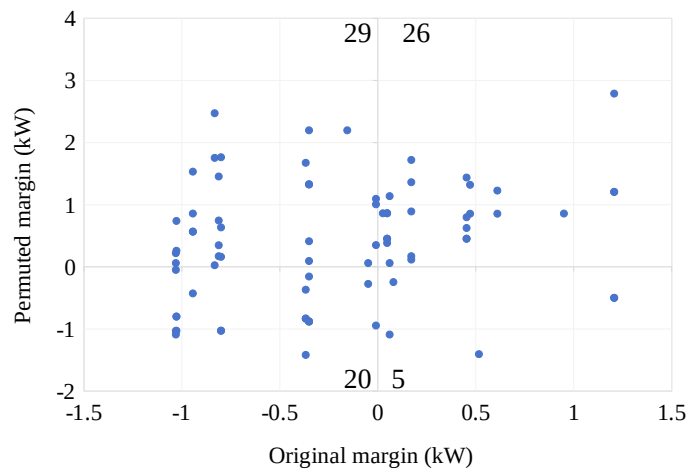


b Supply troughs during calls

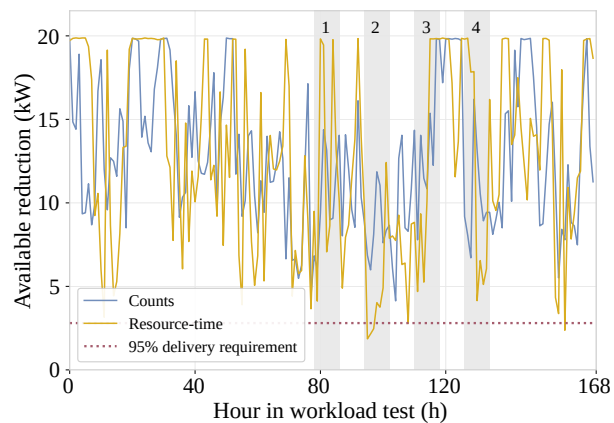


Reference products: aligned response and recovery

c Power reduction and subsequent recovery

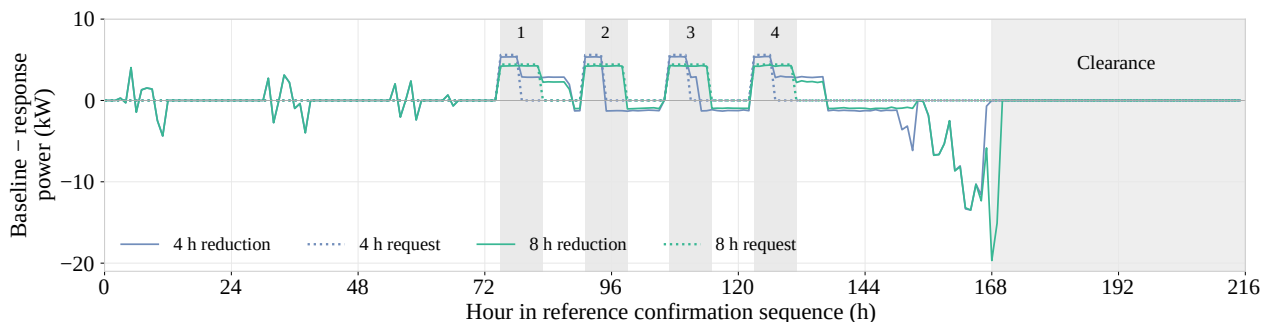

d Accumulation and clearance of deferred work

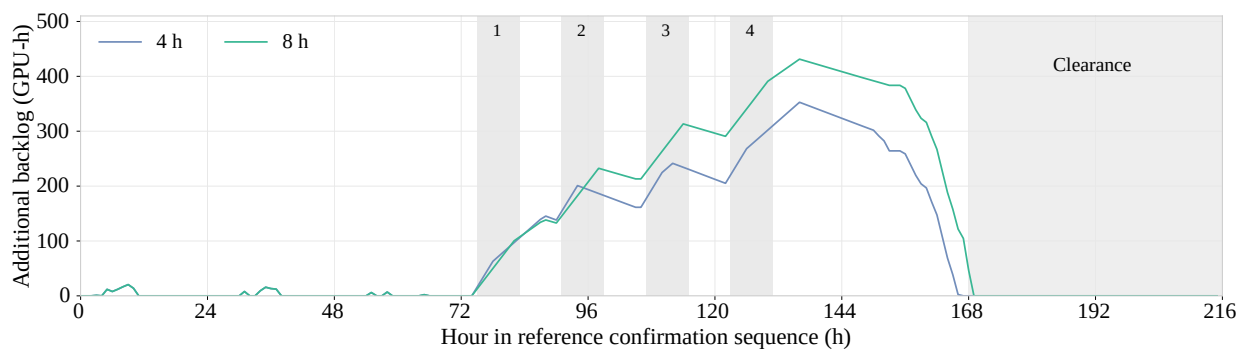

a: all 80 pairs at 2.95 kW. b: protocol seed 990000, first 168 h. c,d: reference seed 989000, all 216 h.

Shaded calls show eight-hour windows; four-hour calls share their start times. Dotted curves: requests.

Panels a,b and c,d use different workload distributions; the selected examples illustrate operation, not reliability.