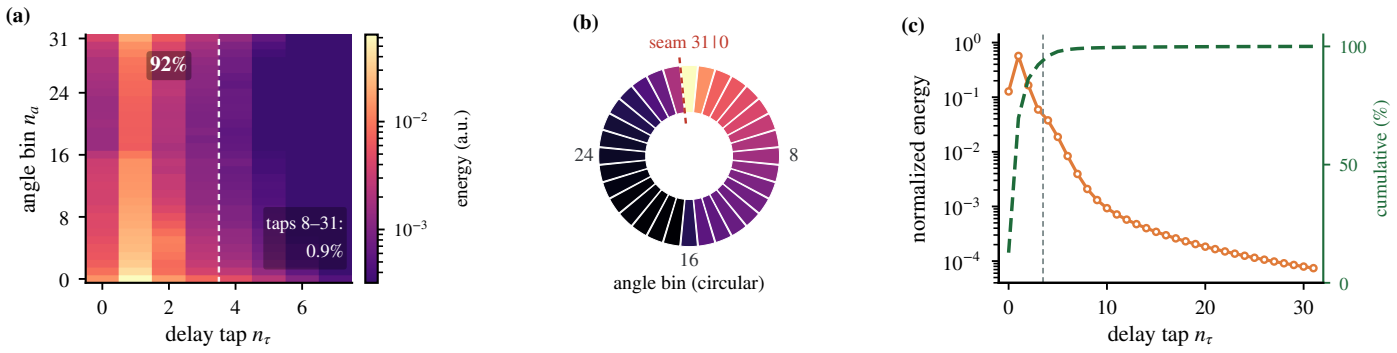
(a)
92%
taps 8–31:
0.9%
angle bin n_a
delay tap n_τ
energy (a.u.)
(b)
seam 31|0
8
16
24
angle bin (circular)
(c)
normalized energy
cumulative (%)
delay tap n_τ