



Arduino Giga Hat

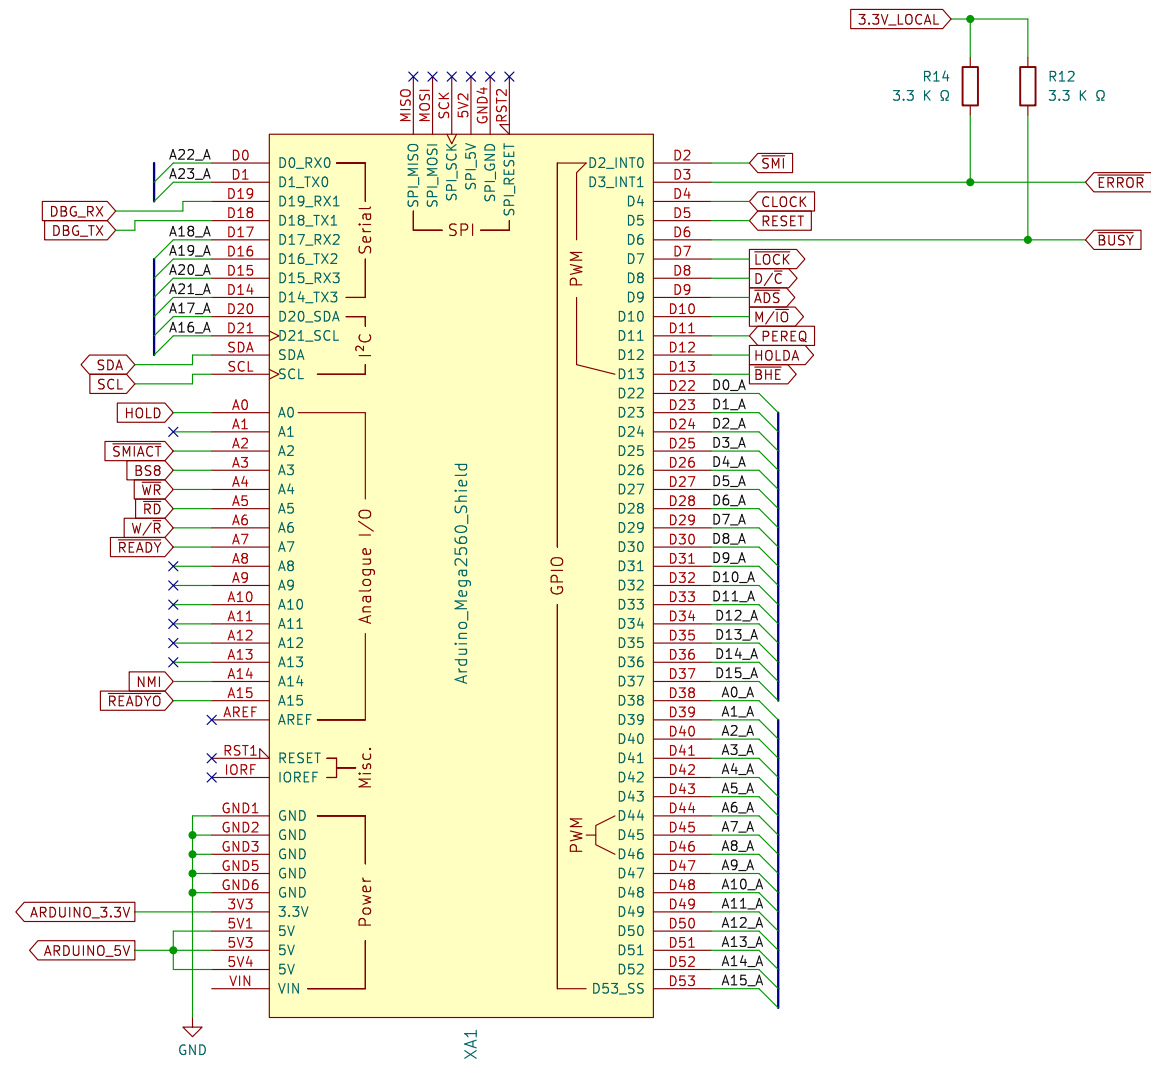


Blinkenlights (Status LEDs)

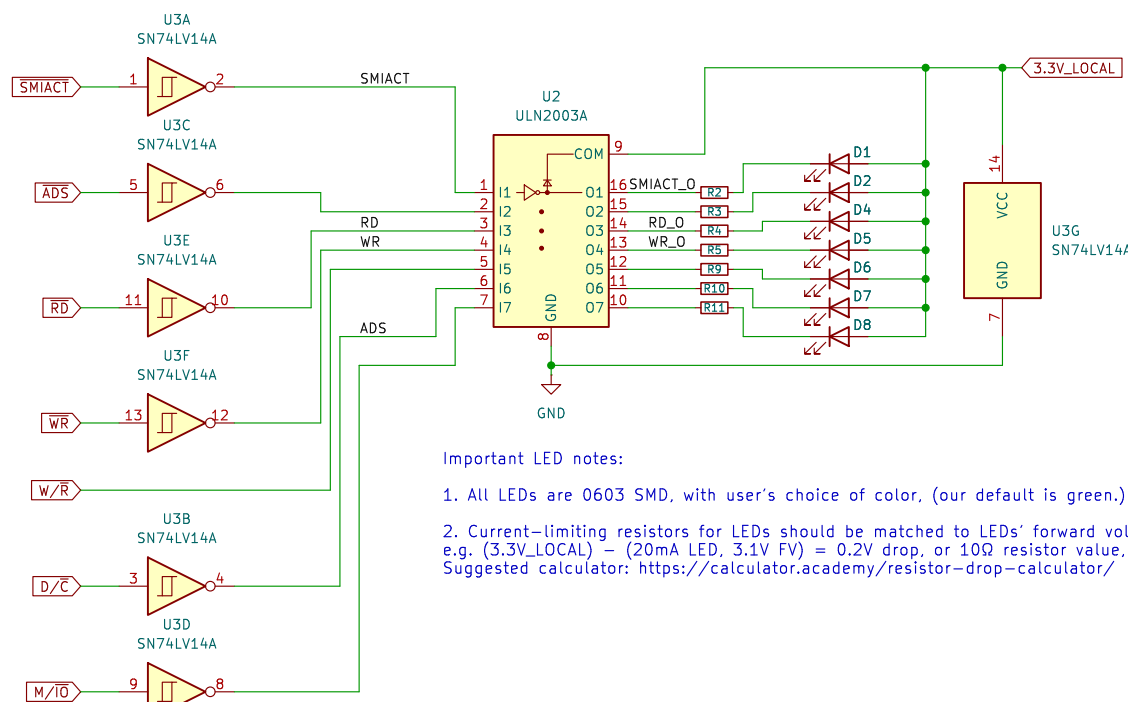


Important LED notes:

1. All LEDs are 0603 SMD, with user's choice of color. (our default is green.)
2. Current-limiting resistors for LEDs should be matched to LEDs' forward voltage, e.g. (3.3V_LOCAL) - (20mA LED, 3.1V FV) = 0.2V drop, or 100 resistor value, etc. Suggested calculator: <https://calculator.academy/resistor-drop-calculator/>


386EX CPU (PQFP-132)

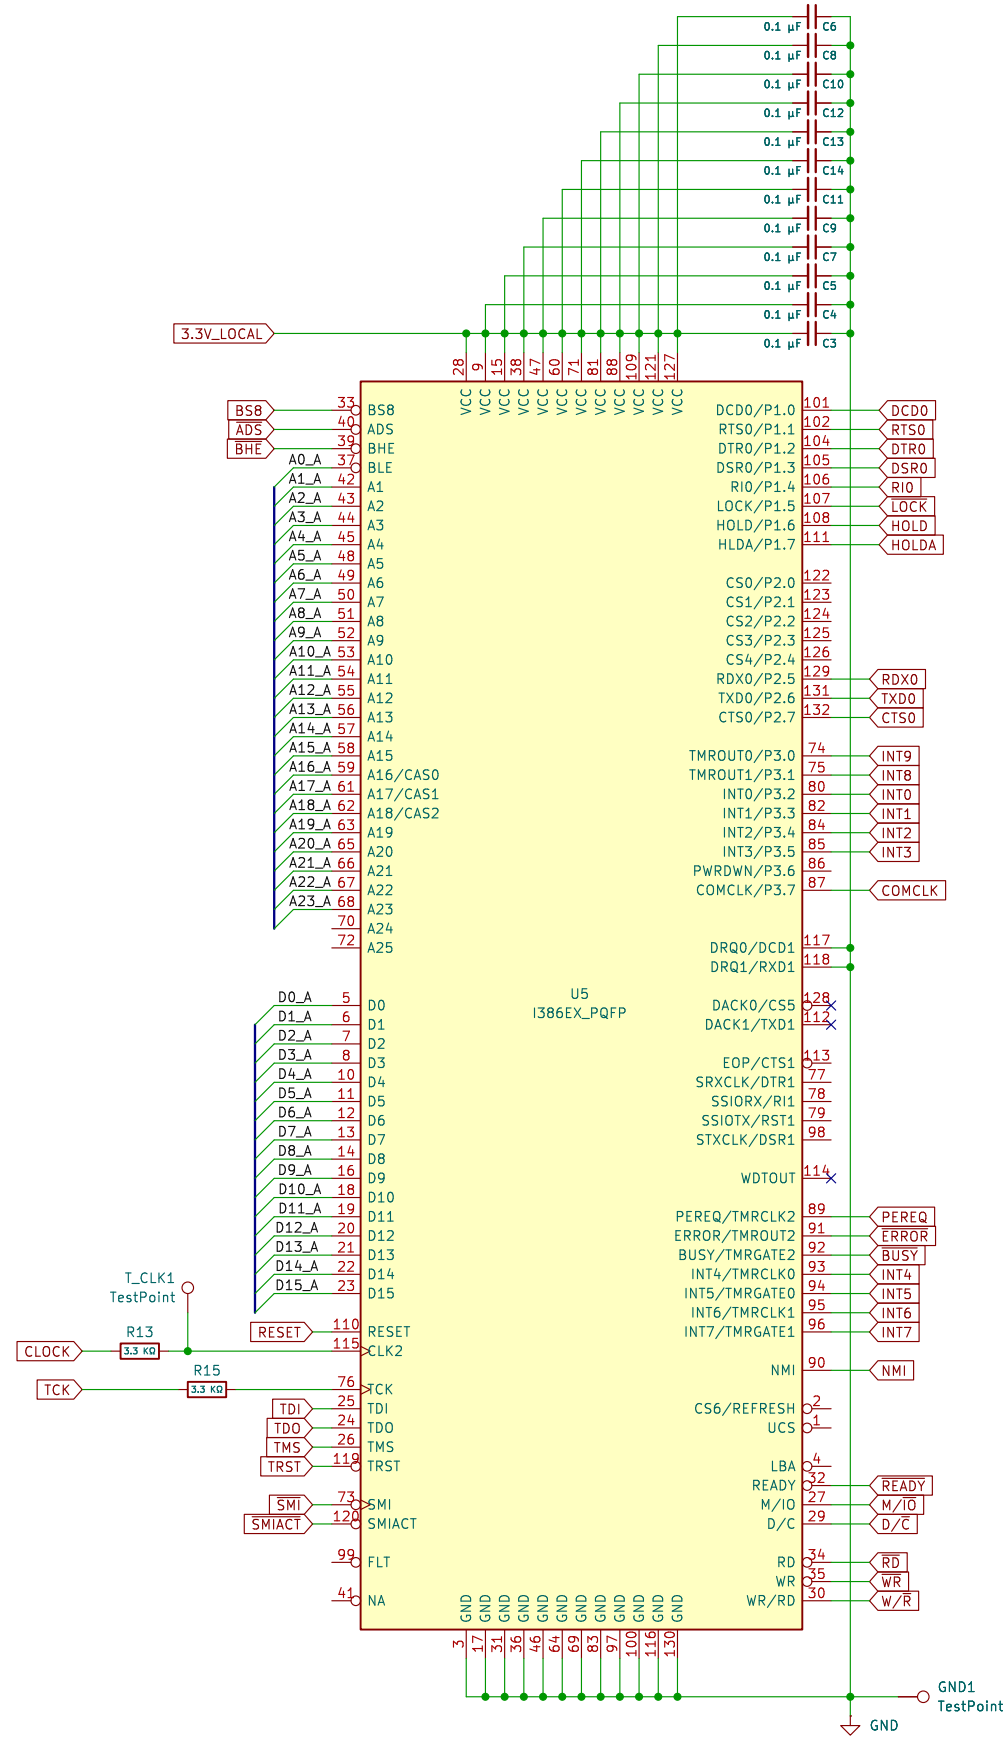


HAT ID EEPROM

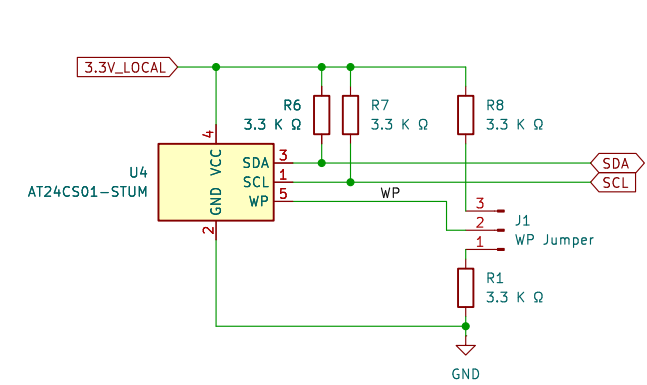


3.3V 1.2A LDO

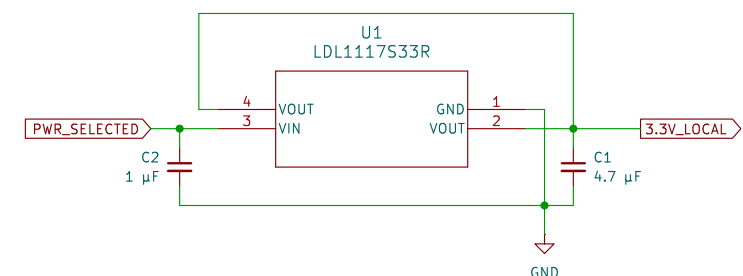


Serial Debug Header

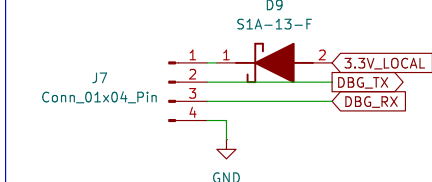


External 5V Power Connector

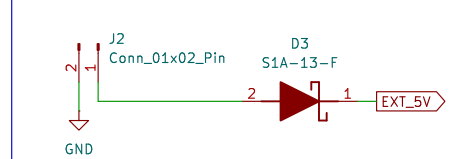


External Interrupt Headers (0-7)

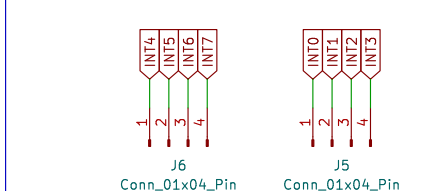

Power source selection header

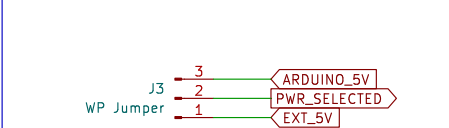

Serial Port Header

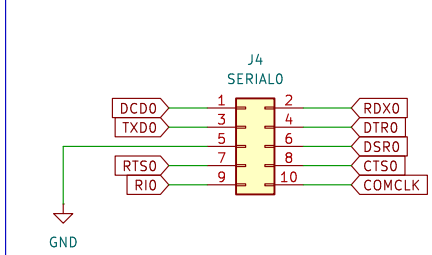

JTAG Header (3.3V power in only)

