

Ceiling Mounted Dehumidifier

ULTRA THIN SERIES • FRESH AIR SERIES

Product Catalog





About Us.



Introduction

Debiasia Green Technology(HK) Company Limited, offers a comprehensive range of humidity and ventilation solutions. As a full-service company, we develop, manufacture, and supply humidity control equipment. Our dehumidifiers comply with international certifications and standards, ensuring reliability and safety, ideal for both commercial and industrial applications.



Our Products

DBA manufactures full range of humidity control equipments.

1. **Restoration Dehumidifier (Portable)**
2. **Industrial Dehumidifier**
3. **Ceiling Mounted Dehumidifier**
4. **Wall Mounted Dehumidifier**
5. **Desiccant Dehumidifier**
6. **Humidity Control Unit (Dehumidifying and Humidifying)**
7. **Climate Control Unit (Dehumidifying, Humidifying, Cooling and Heating)**



Ceiling Mounted Dehumidifier

DBA ceiling-mounted dehumidifier is the ideal solution for managing humidity levels by effectively removing excess moisture from multiple spaces simultaneously. Perfect for both commercial and residential environments, these units are installed on the ceiling, offering a discreet and space-saving design while enhancing airflow throughout the area.

- **Mold and Mildew Prevention**
- **Improve Air Quality**
- **Space Saving**
- **Quiet Operation**
- **App/Smart Home Integration**
- **Energy Saving**



Minimalist Aesthetics

20cm Ultra Slim Design, Hidden Installation.




Powerful Performance

Maintain Optimal Humidity Level at All Times.



Auto Pump Drainage

Head Lift up to 1.8 meters.

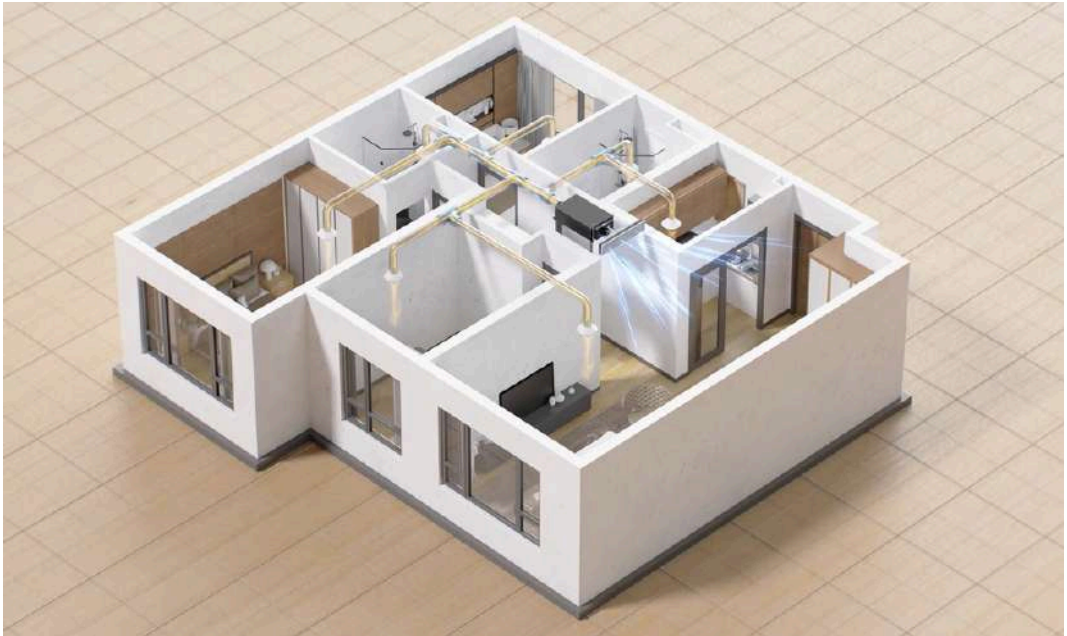

Whole-House Dehumidification System

Efficiently Dehumidifies Multiple Spaces Simultaneously.



UV-C Sterilization Lamp

Eliminates 99.9% Bacteria and Viruses in the Air.



Multiple Safety Features

Automatically Monitors Operational Status.



Humidity Control at Your Fingertips

LCD Screen, Remote Controller, Mobile App, and Smart Home Integration.



Metal Cast Motor

Stable and Durable
Features Japan NSK Bearing.



40dB Quiet Operation

Multiple Shock-Absorbing Designs.



ULTRA THIN SERIES

20-120 L / DAY

DBA-UTC20

Dehumidification: **20 Liters / Day**
Cover Area: **200 - 400 Sqft**
Airflow: **220CMH**
Noise Level: **39dB(A)**
Dimension: **L865xW376xH200mm**



DBA-UTC68

Dehumidification: **68 Liters / Day**
Cover Area: **800 - 1000 Sqft**
Air Flow: **500CMH**
Noise Level: **48dB(A)**
Dimension: **L1010xW500xH240mm**



DBA-UTC120

Dehumidification: **120 Liters / Day**
Cover Area: **1300 - 1500 Sqft**
Airflow: **890CMH**
Noise Level: **50dB(A)**
Dimension: **L1075xW746xH310mm**





Technical Data

Parameters	DBA-UTC20	DBA-UTC68	DBA-UTC120
Dehumidifying Capacity (30°C 80%RH)	20L/Day	68L/Day	120L/Day
Dehumidifying Capacity (26.7°C 60%RH)	9.9L/Day	42L/Day	53L/Day
Cover Area	200-400Sqft	800-1000Sqft	1300-1500Sqft
Airflow	220CMH	500CMH	890CMH
Sound Pressure Level at 3 Meters	39dB(A)	48dB(A)	50dB(A)
Static Pressure	80Pa	100Pa	100Pa
Rated Power	196W	880W	1010W
Max. Power	300W	1250W	1600W
Rated Current	1.0A	4.0A	4.7A
Max. Current	1.35A	5.7A	7.4A
Voltage	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Drain Height	1.8m	1.8m	1.8m
Air Outlet/Inlet Flange	Ø146mm	Ø146mm	Ø196mm
Drain Outlet Size	DN15	DN15	DN15
Refrigerant	R134a/230g	R410A/600g	R410A/900g
Operating Temperature	5-40°C	5-40°C	5-40°C
Weight	28kg	42kg	64kg
Dimension	865*376*200mm	1010*500*240mm	1075*746*310mm

*Specifications are subject to change without prior notice.



Configuration	DBA-UTC20	DBA-UTC68	DBA-UTC120
Drain Pump	✓	✓	✓
UV-C Sterilization Lamp	✓	✓	✓
Stainless Steel Mesh Filter	✓	✓	✓
Cold Rolled Steel Casing	✓	✓	✓
Emergency Stop Button	✓	✓	✓
Humidity Sensor with Cable	5 m	5 m	5 m
86x86mm LCD Control Panel with Cable	8 m	8 m	8 m
Type G Plug with Cable	5 m	5 m	5 m
Remote Controller	✓	✓	✓



*Specifications are subject to change without prior notice.

Control	DBA-UTC20	DBA-UTC68	DBA-UTC120
Set Humidity Range	20 - 95%	20 - 95%	20 - 95%
Set Fan Speed	Low / High	Low / High	Low / High
Fan/Dehumidifying Modes	✓	✓	✓
Scheduled On/Off Timer	✓	✓	✓
Fault Detection	✓	✓	✓
Power Off Memory Function	✓	✓	✓
WiFi App Control	✓	✓	✓
Smart Home Integration/BMS RS485 (Modbus)	✓	✓	✓
Dry Contact Control	✓	✓	✓
Water Leak Sensor Port	✓	✓	✓
Fault Indicator Output (220V 6A)	✓	✓	✓

*Specifications are subject to change without prior notice.



DBA-UTC20

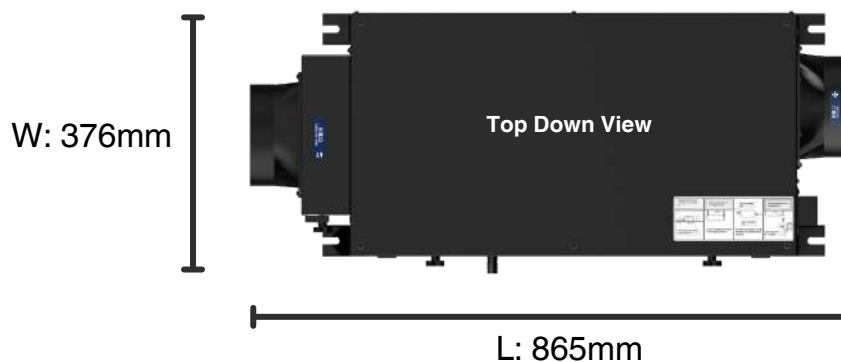




DBA-UTC68



Air Inlet Ø146mm





Air Outlet Ø146mm

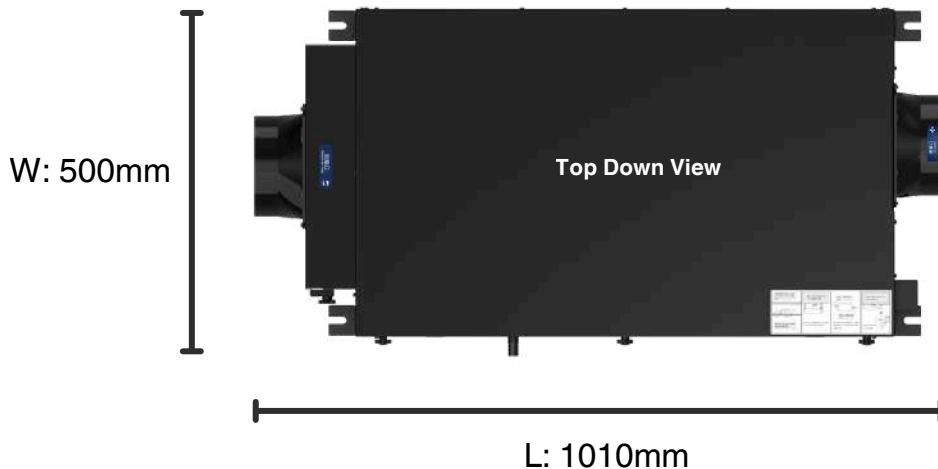



DBA-UTC120

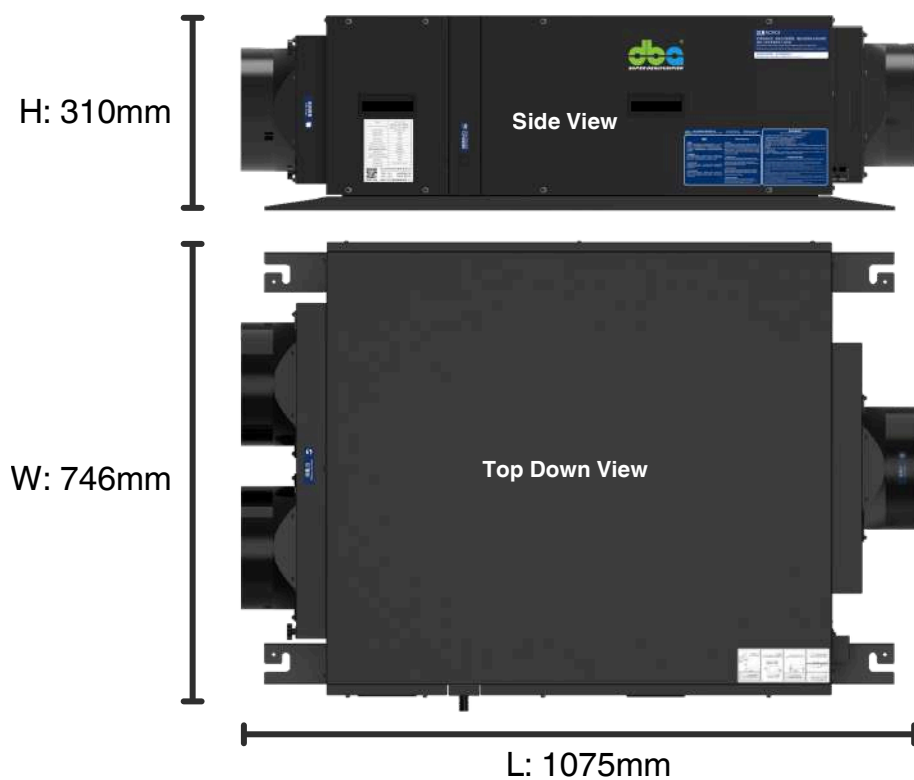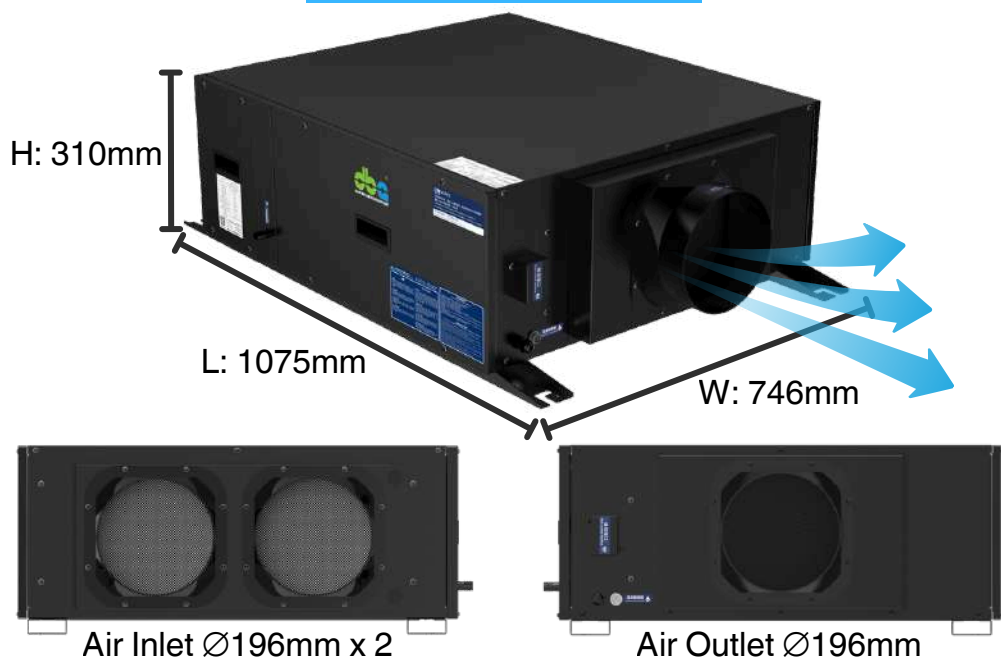



Fresh Air Ceiling Mounted Dehumidifier

DBA fresh air ceiling-mounted dehumidifier supplies outdoor fresh air while maintaining humidity levels. This dehumidifier integrates a fresh air valve, return air valve, HEPA filter, and a 5-in-1 air detector. It can automatically control the indoor fresh air and dehumidification airflow based on indoor air quality and dehumidification requirements.

There are four modes available: dehumidification mode, fresh air mode, mixed mode, and intelligent mode, suitable for different seasonal needs for fresh air and dehumidification throughout the year. It is widely used in residential areas, hotels, offices, and basements, among others.

- **Mold and Mildew Prevention**
- **Fresh Air Supply**
- **Space Saving**
- **Quiet Operation**
- **BMS/Smart Home Integration**
- **Energy Saving**



FRESH AIR SERIES

30-110 L / DAY

DBA-GEC30V



Dehumidification: **30 Liters / Day**
Cover Area: **200 - 400 Sqft**
Airflow: **350CMH**
Fresh Air Supply: **0-175CMH**
Noise Level: **38/50dB(A)**
Dimension: **L992xW526xH245mm**



DBA-GEC50V



Dehumidification: **50 Liters / Day**
Cover Area: **400 - 600 Sqft**
Airflow: **450CMH**
Fresh Air Supply: **0-225CMH**
Noise Level: **42/50dB(A)**
Dimension: **L1004xW560xH255mm**





DBA-GEC70V



Dehumidification: **70 Liters / Day**

Cover Area: **600 - 800 Sqft**

Airflow: **500CMH**

Fresh Air Supply: **0-250CMH**

Noise Level: **45/50dB(A)**

Dimension: **L1032xW626xH265mm**



DBA-GEC110V



Dehumidification: **110 Liters / Day**

Cover Area: **800 - 1200 Sqft**

Airflow: **900CMH**

Fresh Air Supply: **0-450CMH**

Noise Level: **45/50dB(A)**

Dimension: **L1200xW795xH284mm**





Technical Data

Parameters	DBA-GEC30V	DBA-GEC50V
Dehumidifying Capacity (30°C 80%RH)	30L/Day	50L/Day
Dehumidifying Capacity (26.7°C 60%RH)	10.8L/Day	26.4L/Day
Cover Area	200-400Sqft	400-600Sqft
Airflow	350CMH	450CMH
Fresh Air Supply	0-170CMH	0-225CMH
Sound Pressure Level at 3 Meters	38/50dB(A)	42/50dB(A)
Static Pressure	100Pa	100Pa
Rated Power	330W	520W
Max. Power	440W	780W
Rated Current	1.8A	3.0A
Max. Current	2.3A	4.0A
Voltage	220-240V ~50Hz	220-240V ~50Hz
Drain Height	1.2m	1.2m
Air Outlet/Inlet Flange	Ø146mm/Ø146mm x 2	Ø146mm/Ø146mm x 2
Drain Outlet Size	DN15	DN15
Refrigerant	R134a/260g	R410A/400g
Operating Temperature	5-40°C	5-40°C
Weight	39kg	52kg
Dimension	992*526*245mm	1004*560*255mm

*Specifications are subject to change without prior notice.



Configuration	DBA-GEC30V	DBA-GEC50V
Drain Pump	✓	✓
HEPA Filter	✓	✓
Stainless Steel Mesh Filter	✓	✓
DC Brushless Inverter Motor	✓	✓
5 in 1 Air Detector	✓	✓
86x86mm LCD Touch Control Panel with Cable	8 m	8 m
Type G Plug with Cable	5 m	5 m

*Specifications are subject to change without prior notice.

Control	DBA-GEC30V	DBA-GEC50V
Set Humidity Range	20 - 95%	20 - 95%
Set Fan Speed	Low / High	Low / High
Fresh Air/Dehumidification/Mixed /Intelligent Modes	✓	✓
Scheduled On/Off Timer	✓	✓
Fault Detection	✓	✓
Power Off Memory Function	✓	✓
Smart Home Integration/BMS RS485 (Modbus)	✓	✓
Dry Contact Control	✓	✓

*Specifications are subject to change without prior notice.



Technical Data

Parameters	DBA-GEC70V	DBA-GEC110V
Dehumidifying Capacity (30°C 80%RH)	70L/Day	110L/Day
Dehumidifying Capacity (26.7°C 60%RH)	33.6L/Day	52.8L/Day
Cover Area	600-800Sqft	800-1200Sqft
Airflow	500CMH	900CMH
Fresh Air Supply	0-250CMH	0-450CMH
Sound Pressure Level at 3 Meters	45/50dB(A)	45/50dB(A)
Static Pressure	100Pa	100Pa
Rated Power	850W	1020W
Max. Power	1150W	1415W
Rated Current	4.1A	4.8A
Max. Current	5.4A	6.5A
Voltage	220-240V ~50Hz	220-240V ~50Hz
Drain Height	1.2m	1.2m
Air Outlet/Inlet Flange	Ø146mm/Ø146mm x 2	Ø196mm/Ø196mm x 2
Drain Outlet Size	DN15	DN15
Refrigerant	R134a/550g	R410A/900g
Operating Temperature	5-40°C	5-40°C
Weight	60kg	71kg
Dimension	1032*626*265mm	1200*795*284mm

*Specifications are subject to change without prior notice.



Configuration	DBA-GEC70V	DBA-GEC110V
Drain Pump	✓	✓
HEPA Filter	✓	✓
Stainless Steel Mesh Filter	✓	✓
DC Brushless Inverter Motor	✓	✓
5 in 1 Air Detector	✓	✓
86x86mm LCD Touch Control Panel with Cable	8 m	8 m
Type G Plug with Cable	5 m	5 m

*Specifications are subject to change without prior notice.

Control	DBA-GEC70V	DBA-GEC110V
Set Humidity Range	20 - 95%	20 - 95%
Set Fan Speed	Low / High	Low / High
Fresh Air/Dehumidification/Mixed /Intelligent Modes	✓	✓
Scheduled On/Off Timer	✓	✓
Fault Detection	✓	✓
Power Off Memory Function	✓	✓
Smart Home Integration/BMS RS485 (Modbus)	✓	✓
Dry Contact Control	✓	✓

*Specifications are subject to change without prior notice.

Contact

Website: www.dba.hk

Tel: +852 2541 1611

WhatsApp: +852 5488 0850

Email: dba@dba.hk

Address: Room 04 4/F, Wah Fat Industrial Building
10-14 Kung Yip Street, Kwai Chung, Hong Kong

