Technical white paper

HPE product carbon footprint methodology

Contents

1. Introduction 3
2. General information and scope 3
2.1 Goal and scope 3
2.2 Declared unit 3
3. Boundary setting 3
3.1 Life cycle stage and unit processes 4
3.1.1 Manufacturing 4
3.1.2 Transportation 5
3.1.3 Use 5
3.1.4 End of life 5
3.2 Unit process exclusion 5
4. Allocation 5
5. Data collection, calculation methodology, and quality 6
5.1 Data collection and calculation methodology 6
5.1.1 Manufacturing 6
5.1.2 Transportation 7
5.1.3 Use 8
5.1.4 End of life 8
5.2 Data quality 9
6. Uncertainty 9
7. Inventory results 9
8. Assurance 10
9. License and restrictions 10

1. Introduction

Hewlett Packard Enterprise is committed to measuring, reporting, and reducing the environmental impact of our products. One of the ways in which we communicate this environmental impact is through product carbon footprints (PCFs), which estimate the greenhouse gas (GHG)* emissions of a product for each life cycle stage. A PCF is also known as a carbon footprint of a product (CFP).

This document follows the GHG Protocol Product Standard,[1] which requires the reporting entity (in this case HPE) to disclose the following information as part of the PCF methodology: general information and scope, boundary setting, allocation, data collection and quality, uncertainty, inventory results, and assurance. HPE collects data from our value chain using the Partnership for Carbon Transparency (PACT) Methodology.[2] Our carbon footprint implements the CFP systematic approach defined by ISO 14067[3] and the PCF models follow the streamlined CFP methodology defined by IEC 62921.[4] The PCF is further guided by IEC 62725, ISO 14040 and ISO 14044.[5]

HPE is committed to data transparency and accuracy and will continue its efforts to improve the data as new information becomes available.

2. General information and scope

2.1 Goal and scope

The goal of HPE PCFs is to accurately estimate the cradle-to-grave GHG emissions of HPE products. The reason for carrying out this study is to provide PCF results to customers upon request and satisfy regulatory requirements. The intended audience includes sustainability experts and life cycle analysis (LCA) practitioners. For more details on PCF and LCA, please see the frequently asked questions about HPE product carbon footprints.

The system boundary for our product system is cradle to grave, which includes raw material acquisition and manufacturing for each base unit and component, assembly, transportation of the product to the customer location, electricity consumed during use, and end-of-life treatment.

2.2 Declared unit

The purpose of this section is to outline the declared unit used for HPE PCF calculations and to provide the reasoning behind the choice of the declared unit.

HPE sells a wide array of hardware including infrastructure, server, storage, and networking products. These products are sold as build to order (BTO), configured to order (CTO), or individual option kits. Configured to order allows the customer to customize their product by selecting multiple part numbers that are preassembled and tested.

The PCF declared unit (also known as unit of analysis) is measured per piece and defined within the PCF report by the category and description for each part number. When multiple part numbers comprise the configured product, the carbon footprint is aggregated and presented for each life cycle stage.

3. Boundary setting

HPE calculates cradle-to-grave emissions for all physical products sold from fiscal year (FY) 2020 to present. The choice of FY 2020 is in alignment with the baseline year for our value chain net-zero commitments. The geographic scope is generally global except for the calculation of manufacturing and energy use emissions which are country specific.

* Greenhouse gas (GHG) emissions are commonly referred to as carbon emissions. Carbon Dioxide is the main component of greenhouse gases. Other components include Methane, Nitrous oxide and fluorinated gases.

[1] "Greenhouse Gas Protocol—Product Life Cycle Accounting and Reporting Standard," by World Resources Institute (WRI) and World Business Council for Sustainable Development (WBCSD), GHG Protocol, 2011.

[2] "PACT Methodology: Guidance for the Accounting and Exchange of Product Life Cycle Emissions," PACT, World Business Council for Sustainable Development (WBCSD), January 12, 2023.

[3] International Standards Organization (ISO) 14067:2018 Greenhouse gases—Carbon footprint of products—Requirements and guidelines for quantification.

[4] International Electrotechnical Commission Technical Reports IEC 62921 and IEC 62725.

[5] International Standards Organization (ISO) 14040 and 14044: Environmental management—Life cycle assessment standards.

3.1 Life cycle stage and unit processes

The purpose of this section is to outline the descriptions of each life cycle stage as well as unit processes included within each stage.

GHG emissions are subdivided by life cycle stage (manufacturing, transportation, use, and end of life) as illustrated in Figure 1. Each life cycle stage may include one or multiple unit processes. Each unit process involves intermediate flows of materials and energy and elementary flows with the environment. To simplify the diagram, the material, energy, and elementary flows are omitted from Figure 1.

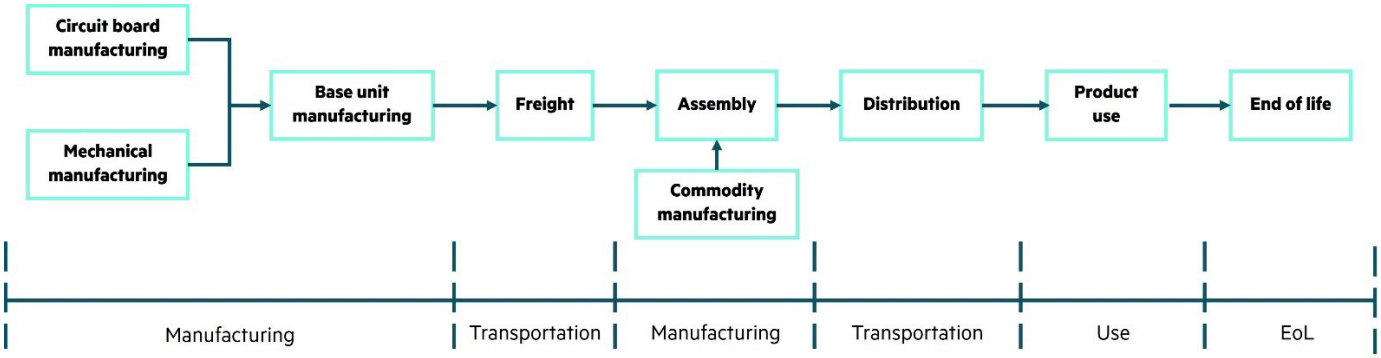

Figure 1. Life cycle stages with included unit processes

Figure 1 represents a general product system. Some HPE products may have variations and to account for variability, we are following a modular format where we assign each final product a category reflecting these physical differences. Each category is associated with a set of unit processes that need to be included in the calculation of the carbon footprint. The emissions and uncertainty associated with each unit process can be calculated according to various models depending on the level of input data available. The final product's carbon footprint is calculated for each life cycle stage by summing the emissions from all the unit processes relevant to that product or collection of products.

3.1.1 Manufacturing

The Manufacturing life cycle stage includes multiple product systems (circuit boards, mechanical parts, base units, and commodities). A typical product may consist of a base unit manufactured from circuit boards and mechanical parts, such as metal or plastic. The electrical and mechanical components may be produced in their respective factories from components and materials, then shipped to the factory that produces the base unit. The base unit is then shipped by freight to an assembly factory where it is configured to the customer's specification with a set of defined option kits.

- **Base unit and commodity manufacturing**

  This unit process covers GHG emissions generated from raw materials extraction, processing, and product manufacturing. It includes multiple product systems (circuit boards, mechanical parts, base units, and commodities) and assembly. HPE prioritizes the calculation of base unit and commodity manufacturing emissions in the following preference: primary PCF using part number-specific data, attribute models based on category-specific features such as product model or family, gigabyte, or kilogram. Details of these data models can be found in section 5.1.1.

- **Assembly**

  The assembly unit process covers GHG emissions associated with assembling, testing, packaging, and warehousing the configured product. The assembly emissions are calculated based on allocated site electricity and fossil fuel energy consumed for product assembly, testing, and warehousing. HPE collects the following data from each site: electricity and fossil-fuel emissions factors, energy use, and quantity of products produced. HPE uses an allocation method by dividing the annual GHG emissions from the assembler by the annual production volume. HPE will continue to improve this calculation by using production cycle times for allocating factory emissions for assembled products.

3.1.2 Transportation

The Transportation life cycle stage includes the movement of base units produced at manufacturing facilities to assembly locations (covered under the freight unit process) as well as movement of final product to customer location (covered under the distribution unit process). The emissions for both unit processes are calculated at a per product level based on travel distance, transportation mode (air/ocean/van/truck), and applying appropriate transportation mode emission factors, which are within the acceptable Global Logistics Emissions Council (GLEC)[6] provided emission factor range for each mode. For more information, see the section 5.1.2.

3.1.3 Use

The Use life cycle stage includes emissions associated with the generation of the electricity needed to power HPE products. These emissions are estimated based on average power consumption over the product's specified lifetime. Average power consumption is obtained from system measurements during the use of the product or estimated by HPE Power Advisor[7] or other HPE-internal power measurements. Lifetime energy consumption is estimated by multiplying the average power consumption times the number of years in a product's lifetime. Emissions are estimated from grid emissions factors in the country where the product is used during the years of operation.

Use emissions calculations can also include emissions associated with electricity consumption by auxiliary data center equipment, such as uninterruptable power supplies (UPS), computer room air conditioning (CRAC), and lights. Emissions from auxiliary data center equipment are estimated by scaling the power consumption by the power usage effectiveness (PUE) of the data center. The PUE is the ratio of total data center power consumption to IT equipment power consumption in the data center. After scaling the power consumption by PUE, the emissions calculation proceeds in the same manner.

3.1.4 End of life

The End-of-life life cycle stage includes emissions associated with recycling and disposing of the item at the end of its useful life, including transportation and disposal processing, such as landfilling or recycling. We estimate the emissions associated with transportation based on the volumetric weight of the product and assuming it is transported 1000 km by truck to its disposal location. We estimate emissions associated with the end-of-life process by assuming that 20% by weight of products will be disposed of in landfill and 80% by weight of products will be recycled.[8]

3.2 Unit process exclusion

HPE currently does not include any nonattributable processes in the PCF calculations. We also exclude service and repair processes due to the irregularity of when this process is required, the diversity of repair activities, and the assumption that this process would yield a negligible impact well below the allowed 5% cut-off criterion.[9]

4. Allocation

HPE uses allocation models for the assembly unit process by dividing the annual GHG emissions from energy use by the yearly quantity of products produced by each factory. In cases where the commodity and base unit manufacturing locations serve multiple customers, the energy and emissions data is allocated to represent HPE related values.

[6] "Global Logistics Emissions Council (GLEC) Framework for Logistics Emissions Accounting and Reporting," Smart Freight Centre, 2024.
[7] HPE Power Advisor—A tool for estimating power requirements for HPE enterprise solutions.
[8] Based on HPE internal data analysis.
[9] International Standards Organization (ISO) 14040 and 14044: Environmental management—Life cycle assessment standards.

5. Data collection, calculation methodology, and quality

5.1 Data collection and calculation methodology

HPE digitally collects relevant carbon data for each part number from our internal operations, sales, engineering, and other databases. HPE also digitally collects emissions from our IT supply chain. In addition, we also rely on several external emission factors databases including IEA,[10] ecoinvent,[11] Ember Climate,[12] U.S. Environmental Protection Agency (EPA),[13] and others.

5.1.1 Manufacturing

Details of primary data and emission factors utilized to calculate manufacturing life cycle stage impacts are presented in Table 1.

Table 1. Description of primary data and emission factors collected for manufacturing stage

Data collected	Emission factors (EF)
Unit processes: Base unit and components	
– Category description – Bill of materials (BOM) – Quantity, weight, and volume across parts – Several category-specific attributes such as printed circuit board (PCB) size, die sizes, core count, capacity	– Component PCFs from Suppliers complying with PACT Methodology include mandatory attributes such as secondary emission factors, IPCC AR5, and AR6 100-yr global warming potential (GWP) factors (see Primary PCF description below for details) – Custom-built attribute and category LCA models (see Attribute model and Category model section for details) – Grid EF from IEA 2021 (2023 edition)[14] Material EF from ecoinvent v3.10
Unit process: Assembly	
– Annual energy consumption (electricity and other fuels) – Annual production volumes	– Priority is given to market-based grid EF provided by assembly factory when available – In absence of market-based grid EF, location-based grid EF from IEA 2021 (2023 edition) is used

[10] International Energy Agency (IEA) Emission Factors 2024.
[11] ecoinvent—Life Cycle Assessment (LCA) database provides inventory data for various products and services. Version 3.11.
[12] Ember Climate is open database for global electricity emission factors.
[13] "Emissions & Generation Resource Integrated Database (eGRID)," US Environmental Protection Agency (US EPA), 2023.
[14] International Energy Agency (IEA) Emission Factors 2024.

Primary PCF: Where possible, HPE sources product emissions from a part-number-specific PCF containing the highest level of primary data and the least amount of uncertainty. HPE digitizes all primary PCF emissions using the data model developed by the Partnership for Carbon Transparency (PACT).[15] For commodities, HPE is working with partners across the tech industry to measure, digitize, and communicate primary PCF across the supply chain. We evaluate each primary PCF for completeness, accuracy, amount of primary data and only use a supplier PCF when they meet our data quality standards.

Attribute model: When a primary PCF is not available, we employ attribute models to estimate the carbon footprint. We currently use an attribute model for server, storage, and SSD. Table 2 provides an overview of the key features of the attribute model for each category. HPE is working to expand the number of attribute models.

Table 2. List of product categories with attribute models and the key attributes considered in the models

Item category	Attribute model key features
SSD	– Item footprint calculated from emission factors obtained from LCA-supported model from Green Cloud computing report published by German Federal Environmental Agency (Umweltbundesamt)[16] – LCA models support calculating cradle-to-gate SSD unit processes by calculating NAND flash and all other SSD emissions separately. The NAND flash scales based upon drive capacity and silicon size.
Server and storage	– Items mapped to set of LCA models based on product family and generation – LCAs consider motherboard area and enclosure mass

Category model: When a primary PCF or attribute model is not available, we use a category-average carbon footprint. Category carbon footprints are sourced from LCA models built with average attribute values (for example, average mass or circuit board size).

The result of the Life Cycle Impact Assessment (LCIA) for unit processes for manufacturing is emissions in kg CO_2e per item.

5.1.2 Transportation

Data used to calculate emissions from transportation are listed in Table 3.

Table 3. Description of primary data and emission factors collected for the transportation stage

Data collected	Emission factors (EF)
Unit processes: Freight and distribution	
– Locations of base unit manufacturing and assembly factories – Travel distances (inter factory, factory to customer) – Transportation modes (air, truck, van, or ocean) – Product weight	– Annual well-to-wheel (WTW) emissions factors (including extraction and refining) from logistics service providers (LSPs) for each transportation mode and verified using GLEC[17] provided range for each mode of transportation

[15] "PACT Methodology: Guidance for the Accounting and Exchange of Product Life Cycle Emissions," PACT, World Business Council for Sustainable Development (WBCSD), January 12, 2023.
[16] Green Cloud computing. Report published by German Federal Environment Agency, June 2021. Available online: umweltbundesamt.de/publikationen/green-cloud-computing
[17] "Global Logistics Emissions Council (GLEC) Framework for Logistics Emissions Accounting and Reporting," Smart Freight Centre, 2024.

HPE constructed an emission factor per mode per year using weighted average emissions calculated across all shipments using LSP-calculated WTW emissions. This emission factor was then utilized in conjunction with a weighted average of the transportation mode mix (air, truck, van, or ocean), dimensional weight, and distance for outbound factory shipments. HPE uses the higher value of the actual product weight or volumetric weight (also known as dimensional weight) for each part number. When an item's weight and volume are not known, a category average is used. Emissions factors are based on IPCC AR6 global warming potential (GWP). The emissions factors are expressed in kg CO_2e / ton-km.

5.1.3 Use

Data used to calculate emissions from the use phase are listed in Table 4.

Table 4. Description of primary data and emission factors collected for use stage

Data collected	Emission factors (EF)
Unit process: Use	
– Device power (kW) used for this model is sourced from either HPE Power Advisor (primary aggregated data), other HPE power estimates, or site-specific data measured in real time from a baseboard management controller (BMC) such as HPE iLO – Product lifetime – Power usage effectiveness (PUE)	– Grid emissions intensity (grams of CO2e per kWh) per country and per year are sourced from Ember Climate[18]

The collected data is converted to use phase emissions using the following formula:

(Use GHG emissions) = (Grid emissions Intensity) x (device power) x (power duration) x (PUE)

Power duration (hours) is the multiplication of the product lifetime (years), 365 days, 24 hours. The days and hours can be customized to match the specific usage. Power usage effectiveness (PUE) is optional and sourced directly from the customer. The result of the LCIA for this unit process is emissions in kg CO2e per item.

5.1.4 End of life

The end-of-life unit process covers emissions associated with recycling and disposing of the item at the end of its useful life, including transportation, disposal processing, such as landfilling or recycling. The data required is listed in Table 5.

Table 5. Description of primary data and emission factors collected for use stage

Data collected	Emission factors (EF)
Unit process: End of life	
– Weight and volume – Material type – Transportation distance for disposal	– Landfill and recycling process EF sourced from U.S. EPA Waste Reduction Model (WARM) v16,[19] which uses the IPCC AR5 global warming potential factors

We estimate the emissions associated with transportation to landfill based on the volumetric weight of the product and assuming it is transported 1000 km by truck to its disposal location. We estimate emissions associated with the disposal end of life processing by assuming that 20% by weight of products will be disposed in landfill and 80% by weight of products will be recycled.[20] The result of the LCIA for this unit process is emissions in kg CO_2e per item.

[18] Ember Climate is open database for global electricity emission factors.
[19] "Basic Information about the Waste Reduction Model," US Environmental Protection Agency (US EPA).
[20] Based on HPE internal data analysis.

5.2 Data quality

Data quality checks are applied at every stage of our data collection and PCF calculation process. Understanding the sensitivity of calculations to the inputs applied, HPE carefully reviews and validates each input before insertion into the respective formulas to generate a PCF. For example:

- Data quality checks at the product, component, and assembly level include reviewing the correct classification of material groups, category assignments, attributes, weight, and volume. These checks are performed using both manual review and machine learning models. We also ensure that category-average attributes are accurate by digitally recalculating the average values monthly from the operations database. Supplier data are quality checked as described in section 5.1.1.
- Data quality checks at the transportation phase include verifying the applied emission factor against GLEC, weight/distance/mode validation is done by reviewing the same products shipped across the same factory to customers within the same region/country.

Additionally, we check that the carbon footprints reported for each unit process and each category are reasonable by looking for and correcting outliers in the calculated results.

However, as we continually add new products, update models, and extract data from live databases, anomalies may occur in the PCF results. Users of our product carbon footprint data should use discretion and report all suspected anomalous carbon footprint values through the application support channel.

6. Uncertainty

HPE uses the first-order error propagation method (or Gaussian method) based on the uncertainties of the individual inputs to aggregate statistical uncertainty. This approach corresponds to Tier 1 of the IPCC Good Practice Guidance and Uncertainty Management.[21] Each unit process provides a mean value and percent uncertainty of the GHG emissions. When multiple unit processes are sourcing GHG emissions, the uncertainties are assumed to be uncorrelated among unit processes, and thus the total uncertainty is calculated from the square root of the sum of the squares of each unit process' uncertainty (that is, uncertainties summed in quadrature).

Uncertainty of the carbon footprint for each unit process is estimated based on knowledge of the process and understanding of the data quality for that process. Uncertainty can stem from the use of secondary data, allocation, temporal, geographic, completeness, or reliability of the data. For example, uncertainty from use stage emissions occurs from yearly country level grid intensities (both temporal and geographic uncertainty). To mitigate this uncertainty, customers are allowed to use their own custom-defined grid intensity.

7. Inventory results

A standard PCF report from HPE contains the following data:

- Company name (HPE)
- Date for when the PCF was requested
- Unique PCF identifier used for support
- GHG emissions by product life cycle stage in kg CO_2e
- Uncertainty expressed in percent of total
- Product configuration
  - Part number: HPE part number or SKU
  - Category: Grouping of similar products
  - Description: Detailed explanation or declared unit
  - Quantity: The number of items included

[21] "Good Practice Guidance and Uncertainty Management in National Greenhouse Gas Inventories—Methodology Report," IPCC, May 1, 2000.

– Settings

- Product lifetime start: Earliest date of product use
- Product lifetime end: Final date of product use
- PUE: Power utilization effectiveness
- Location: Country where the product is used
- Average power: Average power used over the use duration

To support the open digital exchange of product carbon footprints, HPE will in the future strive to adopt the PACT Methodology[22] (previously known as Pathfinder Framework) to output a digital PCF in JSON format representing the cradle-to-gate emissions.

8. Assurance

Our product carbon footprint methodology has been verified and assured by DEKRA. During the assurance process, the DEKRA team performed a thorough review of our calculation methodology, major assumptions, inputs, data quality and governance and verified with several standards including ISO 14067, ISO 14040/44, and GHG Protocol Product Standard. As a result of this process DEKRA has provided a limited assurance certificate available at the end of this document.

9. License and restrictions

The data inputs, calculation, and reporting of product carbon footprints (PCFs) for HPE products are covered by multiple licenses and legal agreements, which may restrict the use and distribution of these PCFs. Users of any product carbon footprint produced by HPE are informed that certain inputs or calculated values may be proprietary to Aligned Incentives, the International Energy Agency, ecoinvent, or other entities. All information or PCFs are provided as is for the recipient's internal information purposes only; they are not to be incorporated into any further product carbon footprints, included in any databases or collections of product carbon footprints, incorporated into any other carbon footprint tools, used in any way in any other product or service, automatically downloaded or indexed (such as by web crawlers), or used in any artificial intelligence or machine learning training or inference. In providing the PCF, HPE is not providing any service or offering to the PCF's recipient or any other person or entity. In providing the PCF, HPE is not making any representations or warranties of any kind, neither express nor implied, and shall have no liability to any person or entity for any damages, claims, or losses of any kind whatsoever, whether direct, incidental, indirect, special, or consequential, out of or in connection with the PCF, the information contained therein, or the procedures used to create the PCF. The calculated or reported values may include information obtained from a variety of sources, including calculations or measurements of HPE, and includes a variety of assumptions. HPE reserves the right to change, revise, suspend, or discontinue PCF without notice at any time. Neither Aligned Incentives, International Energy Agency, ecoinvent, nor HPE guarantee the accuracy or completeness of this information and are not responsible to any person or entity for any errors or omissions. Furthermore, users of HPE product carbon footprints agree not to attempt to reverse engineer any PCF calculations for any reason, including but not limited to the purposes of obtaining any emissions factors or limited Life Cycle Impact Assessment scores used in HPE or our suppliers' calculations. Please consult legal counsel, an accountant, and/or other independent advisor regarding any use of this information.

Aligned Incentives

Portions of this work are derived from data provided by Aligned Incentives. Such data is proprietary to Aligned Incentives and is for information purposes only. The data is provided as is without any warranties of any kind, either express or implied. The data may include information obtained from third-party sources and Aligned Incentives does not guarantee the accuracy or completeness of such third-party data and is not liable for any errors or omissions therein.

[22] "PACT Methodology: Guidance for the Accounting and Exchange of Product Life Cycle Emissions," PACT, World Business Council for Sustainable Development (WBCSD), January 12, 2023.

International Energy Agency

Portions of this work are derived from information and data obtained from the International Energy Agency (IEA) 2021 (2023 edition) Emissions Factors 2024, All rights reserved; as modified by HPE. The IEA Material is provided as is and as available without any representations, guarantees, or warranties of any kind. The Organization for Economic Cooperation and Development (OECD), IEA, and their licensors shall not be liable for any loss or damage resulting from the use of the IEA Material. Use of the IEA Material is at the user's sole risk, and users agree to indemnify and hold harmless the OECD/IEA from any claims or damages arising from its use.

ecoinvent

Portions of this work are derived from Limited Life Cycle Impact Assessment (LCIA) scores obtained from the ecoinvent association. ecoinvent is the owner of this data and provides the Limited LCIA scores as is and disclaims any liability for damages; accuracy, completeness, or fitness for a particular purpose is not guaranteed. All intellectual property rights in the LCIA scores belong to ecoinvent.

Ember

Portions of this work are derived from data provided by Ember, licensed under the Creative Commons Attribution 4.0 International License. Such data is provided as-is and as-available, without warranties, and the licensor shall not be liable for any damages arising from the use of such data.

Verification Statement

Certificate Name:	Verification Statement of Hewlett Packard Enterprise（HPE）Product Carbon Footprint Methodology built within the HPE carbon service platform provided by HPE Power Advisor
Certificate Holder:	Hewlett Packard Enterprise
Address:	1701 E Mossy Oaks Rd Spring, TX 77389 USA
Reference Standard:	Core Carbon Footprint standards: ➢ ISO 14067:2018 Greenhouse gases — Carbon footprint of products — Requirements and guidelines for quantification ➢ ISO 14040:2006 Environmental management — Life cycle assessment — Principles and framework ➢ ISO 14044:2006 Environmental management — Life cycle assessment — Requirements and guidelines ➢ GHG Protocol Product Standard — Greenhouse Gas Protocol Product Life Cycle Accounting and Reporting Standard (2011) ➢ EPEAT-CCM-2023 — EPEAT Climate Change Mitigation Criteria (Published May 16, 2023) ➢ Pathfinder Framework v2.0 — Pathfinder Framework for Accounting and Exchange of Product Life Cycle Emissions, Version 2.0 Third-Party Verification standards: ➢ ISO 14064-3:2019 Greenhouse gases — Part 3: Specification with guidance for the verification and validation of greenhouse gas statements ➢ ISO 14065:2020 Greenhouse gases — General principles and requirements for bodies validating and verifying environmental information ➢ ISO 14066:2023 Greenhouse gases — Competence requirements for greenhouse gas validation teams and verification teams
Scope of certification:	In accordance with above standards, the following aspects were verified: Methodological Compliance: Whether the calculation model, system boundary, and data quality rules are aligned with above standards Data Sources: Review of activity data and emission factors Uncertainty Management: Whether uncertainty analysis is performed
Level of Assurance	Limited Assurance
Verification report	No. OF24100120
Conclusion	Based on the verification results there is no evidence that the HPE carbon footprint calculation methodology is not in accordance with above standards in all material respects. Limited Assurance is provided based on the selective evidence review.
Validity date	May 6, 2025 - May 5, 2027

General Manager:

Paulson Wei

Date: May 6, 2025

Hangzhou DEKRA Certification Co., Ltd

Floor 14th, International Sunyard, No. 1750 Jianghong Avenue, Binjiang District, Hangzhou, 31

page 1 of 1

Learn more at
HPE.com/us/en/Living-Progress.html

Visit HPE.com

Chat now

© Copyright 2025 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a00144176ENW, Rev. 3

HEWLETT PACKARD ENTERPRISE

hpe.com