"High Frequency Ceramic Solutions"

2450 MHz Antenna P/N 2450AT18A0150 Detail Specification: 05/07/09 05/07/09

General Specifications

•		
Part Number	2450AT18A0150	
Frequency Range	2375 - 2525 Mhz	
Peak Gain	0.5 dBi typ. (XZ-V)	
Average Gain	-0.5 dBi typ. (XZ-V)	
Return Loss	9.5 dB min.	

Input Power	2W max.
Impedance	50 Ω
Reel Quanity	3,000
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity 45-75%RH, 12 mos. max*


	Packaging	Bulk	Suffix = S	Eg. 2450AT18A0150S
P/N	Style	T&R	Suffix = E	Eg. 2450AT18A0150E
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 2450AT18A0150(E or S)
		Tin / Lead	Please consult Factory	

Terminal Configuration No. Function 1 Feeding Point 2 NC 1

Mechanical Dimensions

	ln	mm	†
L	0.126 ± 0.008	3.20 ± 0.20	w
W	0.063 ± 0.008	1.60 ± 0.20	+
T	0.051 +.004/008	1.30 +0.1/-0.2	
а	0.020 ± 0.012	0.50 ± 0.30	

Mounting Considerations

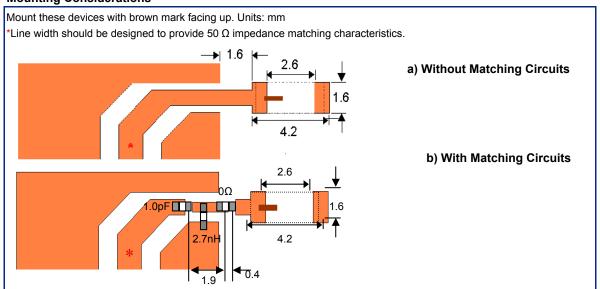


Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.



"High Frequency Ceramic Solutions"

2450 MHz Antenna P/N 2450AT18A0150 Page 2 of 3 Detail Specification: 05/07/09

Typical Electrical Characteristics (T=25°C)

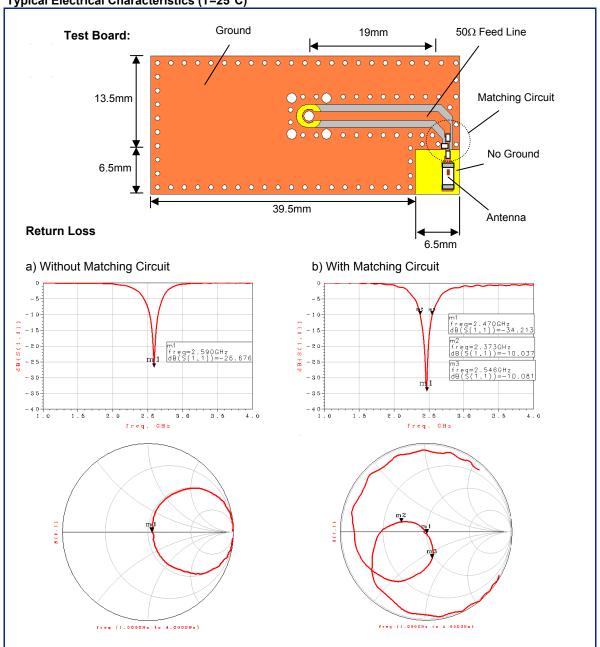


Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.



"High Frequency Ceramic Solutions"

2450 MHz AntennaDetail Specification: 05/07/09

Page 3 of 3

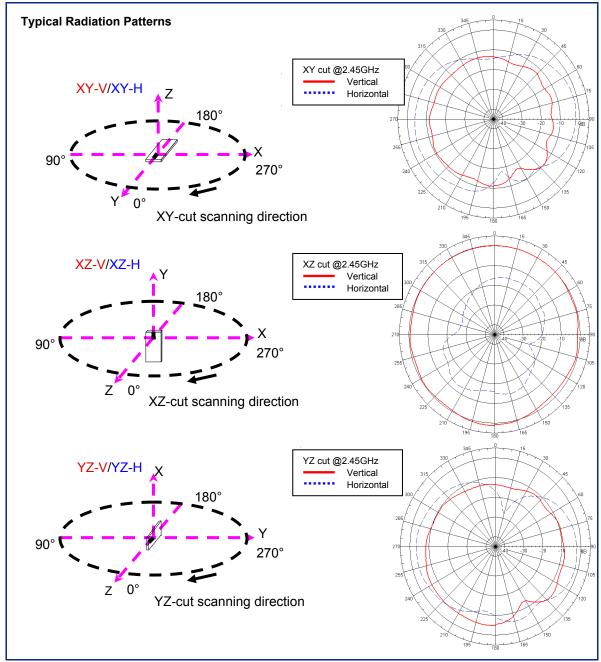

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

2450AT18A0150E