Universal Microwave Components Corp.
5702-D General Washington Drive Alexandria, VA 22312 <> Web: www.umcc111.com
E-mail: sales@umcc111.com <> Tel: (703) 642-6332 <> Fax: (703) 642-2568


Model: PS-D000-2S

Description:		2-Way Power Divider
Operating Frequency:		1.7 – 4.1 GHz
Insertion Loss:		0.35 dB Max
Isolation:		22 dB Min
VSWR:	Σ Port	1.25:1 Max
	Outputs	1.25:1 Max
Amplitude Balance:		± 0.1 dB Max
Phase Balance:		± 0.5° Max
Power Handling (@ SUM-Port):	Load VSWR=∞	2W AVG/CW Max
	Load VSWR <2:1	20W AVG/CW Max
Connectors:		SMA (f)
Impedance:		50 Ω Nominal
Quality:		Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline
(A = 2.600" [66.0mm])

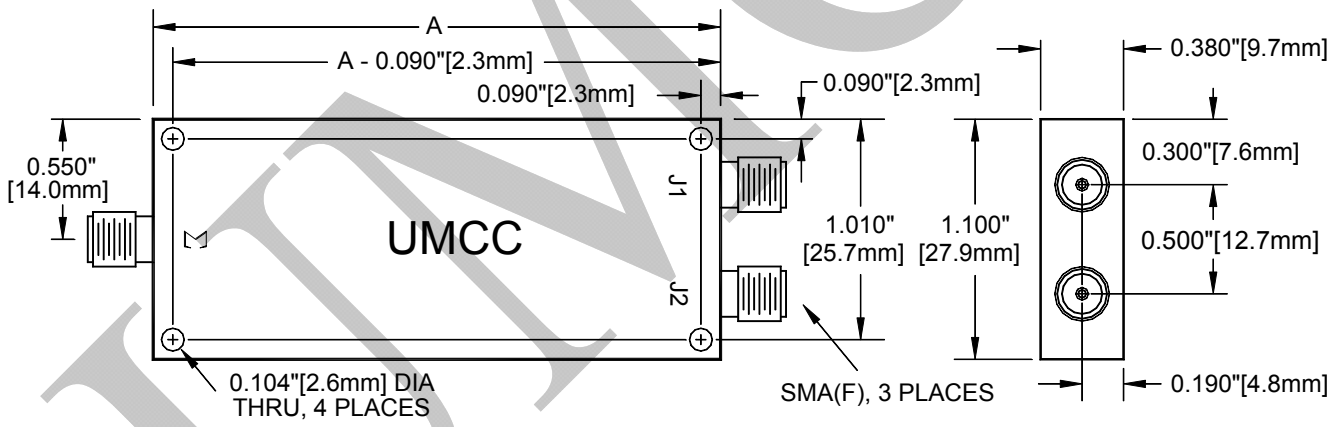

Weight	Tolerances
1.25 oz [35.4 g]	± 0.015" [± 0.38 mm]

UMCC