


# Outdialer Project Guide

v0.1.0 - Dockerized SIP outdialer for Avaya-connected RSVP campaigns

## Purpose


Outdialer Project places consented outbound RSVP calls through an Avaya SIP environment, plays configurable prompts, collects DTMF or speech responses, updates contact status, and gives operators web-based visibility into calls, SIP traces, diagnostics, and AI decisions.

## Architecture

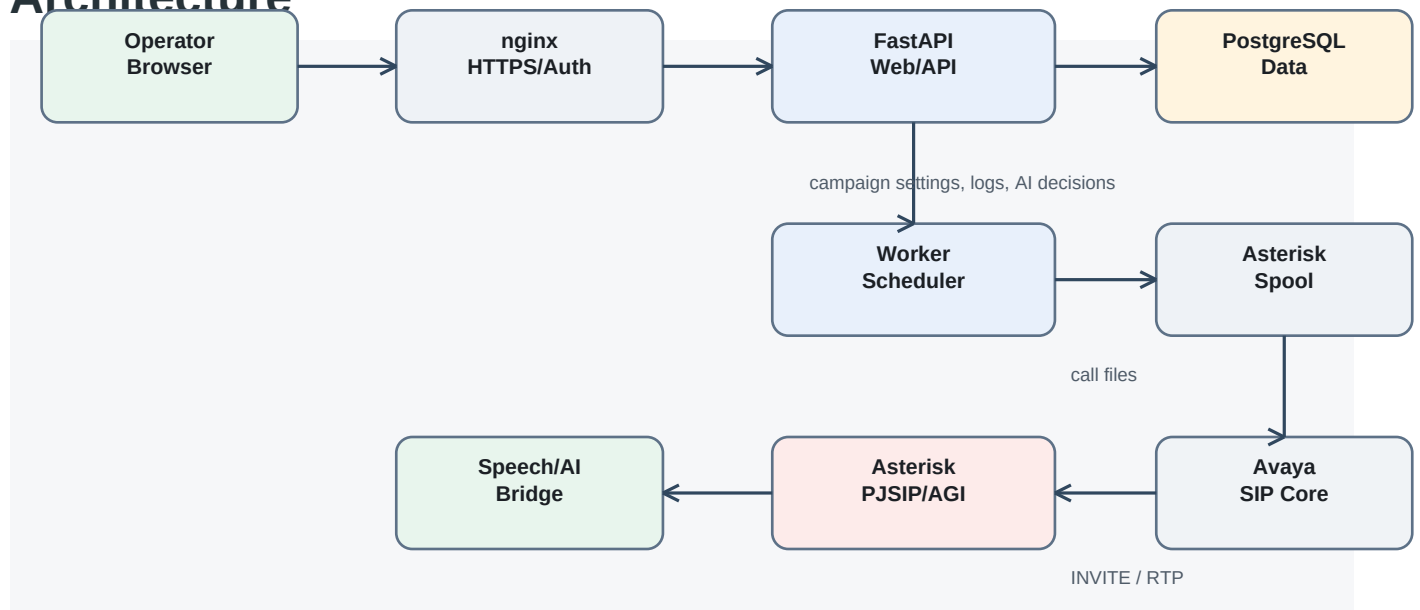

| Component        | Responsibility                                                                      |
|------------------|-------------------------------------------------------------------------------------|
| outdialer-api    | FastAPI web UI, settings, contacts, logs, AI decisions, AGI result endpoint.        |
| outdialer-worker | Finds eligible contacts, enforces call windows/retries, writes Asterisk call files. |
| asterisk         | PJSIP signaling/media, generated prompts, AGI call flow, DTMF and speech capture.   |
| postgres         | Campaign, contact, call attempt, and diagnostic event storage.                      |
| speech/flowise   | Optional TTS/STT and AI chatflow decision services.                                 |

# Call Flow

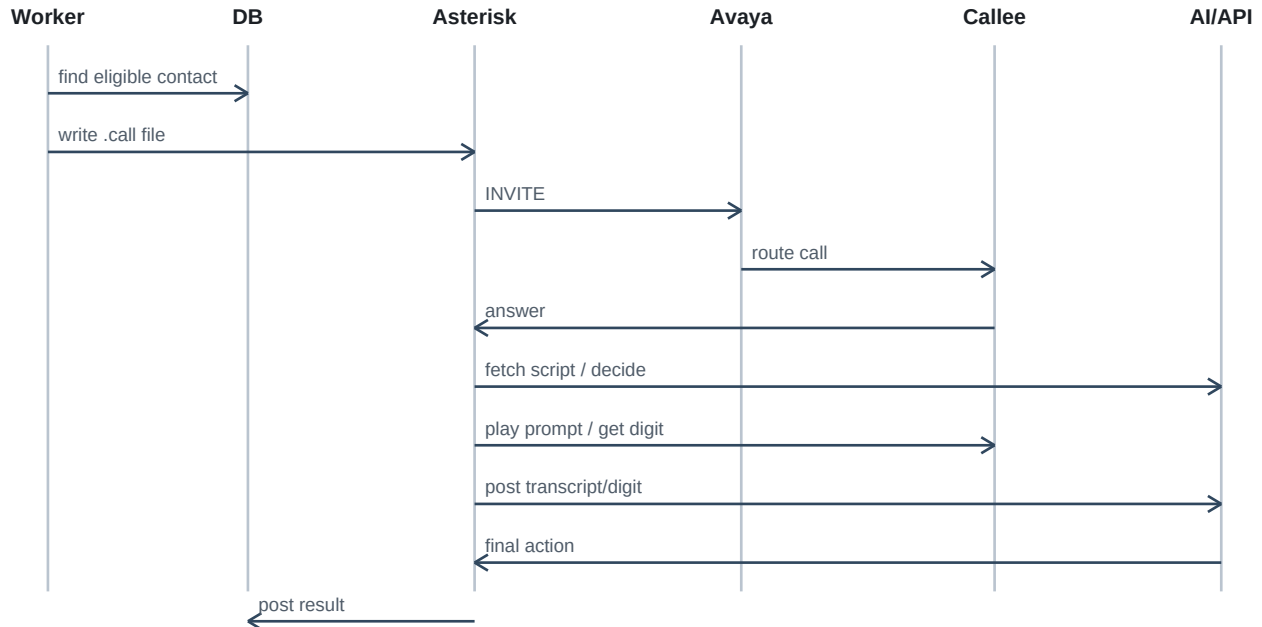

## Fast-Start Audio

Recommended default: **Observe Milliseconds = 0**. This avoids pre-greeting recording/transcription and starts speech immediately after answer.

Dialplan wait after answer is 0.2 seconds to allow media cut-through without creating long silence.

## SIP Routing

- Request-URI/To target uses sip:DIALED\_NUMBER@AVAYA\_SIP\_CONTACT\_HOST.
- From and asserted identity use CALLER\_ID\_NUMBER@AVAYA\_FROM\_DOMAIN.
- Dial prefix is applied after number normalization.
- The Avaya target must be a SIP listener, not a domain controller or non-SIP host.

| Failure                 | Likely Cause                            | First Check                                         |
|-------------------------|-----------------------------------------|-----------------------------------------------------|
| 403 invalid From domain | Avaya rejected From domain or caller ID | AVAYA_FROM_DOMAIN and Avaya domain/adaptation       |
| 404 no route available  | Avaya cannot route dialed digits        | Dial prefix, number format, Session Manager pattern |
| No audio                | RTP/NAT/firewall/media path             | RTP range, external media address, LOCAL_NET        |
| Slow greeting           | Pre-observe or slow uncached TTS        | Observe=0, TTS_TIMEOUT_SECONDS, prompt cache        |

# Operator Runbook

- Open the HTTPS protected UI and choose the campaign.
- Review Dashboard readiness, call window, retry time, and eligible contacts.
- Import or edit Contacts. Use auto-refresh while monitoring active campaigns.
- Confirm caller ID, dial prefix, number format, AI Flow, and Voice Script.
- Start campaign, watch Call Log/Diagnostics/Asterisk SIP Trace, then stop campaign when done.

## Backup And Restore

- Back up PostgreSQL with pg\_dump.
- Store .env securely outside Git.
- Back up nginx auth/cert configuration separately.
- Recordings and logs are optional private artifacts and should not be published.

## Security

- Do not commit .env, recordings, logs, database dumps, htpasswd files, or real Avaya credentials.
- Protect the UI with HTTPS and authentication.
- Call only expected or consented contacts.
- Use recognizable caller ID, reasonable call windows, and modest retries.

## Release Artifacts

| Artifact       | Name                                                   |
|----------------|--------------------------------------------------------|
| GitHub repo    | dblagbro/outdialer-project                             |
| App image      | dblagbro/outdialer-project-app:v0.1.0 and :latest      |
| Asterisk image | dblagbro/outdialer-project-asterisk:v0.1.0 and :latest |
| PDF            | docs/outdialer-project-guide.pdf                       |