Spiral Systems Incorporated

860 Old Hwy 51
Nesbit, MS 38651

399 Old Hickory Blvd,
Old Hickory, TN 37138

Phone: 1-662-429-0373

Double Wall Round Spiral Pipe and Fittings Construction

Double Wall Round – Spiral Pipe – Solid / Solid

Solid / Solid means solid materials are used on both the outer and inner shells.

Double Wall Round – Spiral Pipe – Solid / Perforated

Solid / Perforated means solid materials are used on the outer shell and perforated materials on the inner shells.

- Standard double wall pipe and fittings are supplied with 1” thick, 1-1/2# density fiberglass insulation.
- Double wall spiral pipe is available in lengths from 1 to 20 feet. (Specify when ordering).
- Standard double wall fittings are provided with a solid inner liner. Fittings are available with perforated liner when specified.
- Insulation is available in 1”, 2”, and 3” thickness with 1-1/2# density.
- Standard double wall pipe and fittings are slip joint construction; other connection options are available upon request.
- Pipe and fittings are available in all SMACNA pressure classifications.
- Pipe and fittings can be fabricated for either positive or negative systems.

Spiral Systems Incorporated

860 Old Hwy 51
Nesbit, MS 38651

399 Old Hickory Blvd,
Old Hickory, TN 37138

Phone: 1-662-429-0373

DOUBLE WALL ROUND *Spiral Pipe and Fittings*

Positive Pressure
Spiral Duct & Fittings Construction Standards

- Galvanized
- Paint Grade
- Stainless Steel

	+2" W.G. I.D.		+2" W.G. O.D.	
Inner Diameter	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" – 14"	26	26	26	26
15" – 26"	26*	24	26	24
27" – 36"	24*	22	24	22
37" – 50"	22*	20	22	20
51" – 60"	20*	18	20	18
61" – 86"	18*	18	18	16

	+4" W.G. I.D.		+4" W.G. O.D.	
Inner Diameter	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" – 13"	26	26	26	26
14" – 18"	26	24	26	24
19" – 26"	26*	24	24	22
27" – 36"	24*	22	22	20
37" – 50"	22*	20	20	20
51" – 60"	20*	18	18	18
61" – 86"	18*	18	18	16

	+10" W.G. I.D.		+10" W.G. O.D.	
Inner Diameter	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" – 11"	26	26	26	26
12" – 15"	26	24	26	24
16" – 26"	26*	24	24	20
27" – 36"	24*	22	22	20
37" – 50"	22*	20	20	20
51" – 60"	20*	18	18	18
61" – 86"	18*	18	18	16

* Beaded spiral pipe and fittings.

Notes:
a) If longitudinal seam duct is required, the fitting gauge standards will apply.
b) Standard inner liner for all duct is solid galvanized steel, regardless of outer material.
c) Standard inner liner for all fittings is solid galvanized steel, regardless of outer material.

Spiral Systems Incorporated

860 Old Hwy 51
Nesbit, MS 38651

399 Old Hickory Blvd,
Old Hickory, TN 37138

Phone: 1-662-429-0373

DOUBLE WALL ROUND SPIRAL DUCT CONSTRUCTION STANDARDS

- Aluminum 3003-H14

	I.D. GAUGES		O.D. GAUGES	
	+2" W.G.		-2" W.G.	
Inner Diameter	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" – 8"	.025"	.032"	.025"	.032"
9" – 14"	.025"	.032"	.025"	.032"
15" – 26"	.032"	.040"	.032"	.040"
27" – 36"	.040"	.050"	.040"	.050"
37" – 50"	.050"	.063"	.050"	.063"
51" – 60"	.063"	.071"	.063"	.071"
61" – 84"	NA	.090"	NA	.090"

NA—Not available or not assigned.


Spiral Systems Incorporated

860 Old Hwy 51
Nesbit, MS 38651


399 Old Hickory Blvd,
Old Hickory, TN 37138

Phone: 1-662-429-0373

DOUBLE WALL ROUND *Gored Elbows*

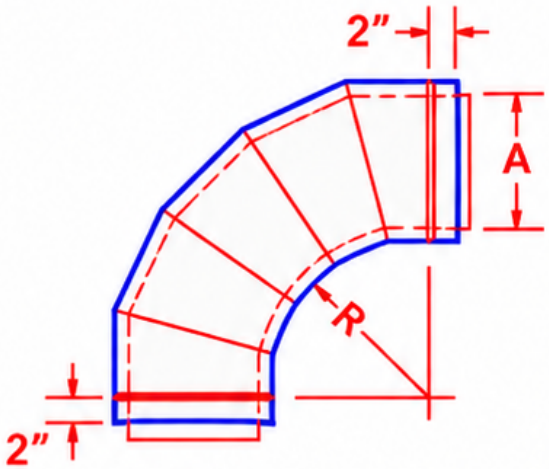


DE90
90° 5–PIECE ELBOW

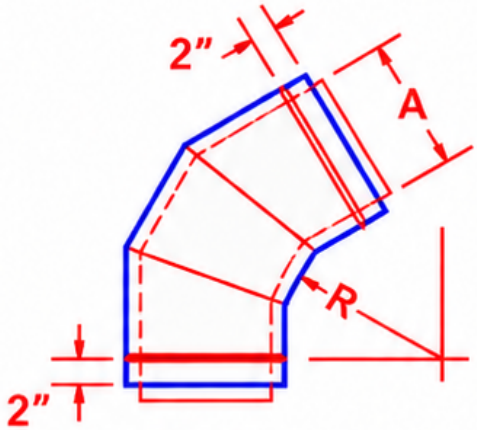


DE60
60° 3–PIECE ELBOW

STANDARD CENTER LINE RADIUS
EQUALS 1-1/2 TIMES DIAMETER
R = 1.5 × A

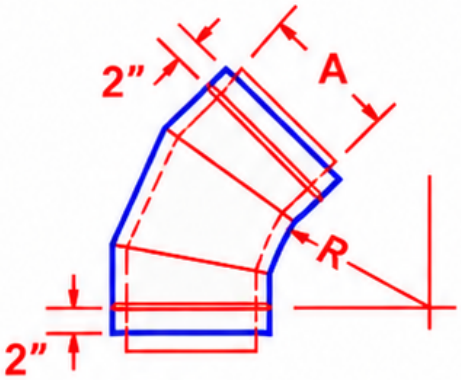

DE45
45° 3–PIECE ELBOW

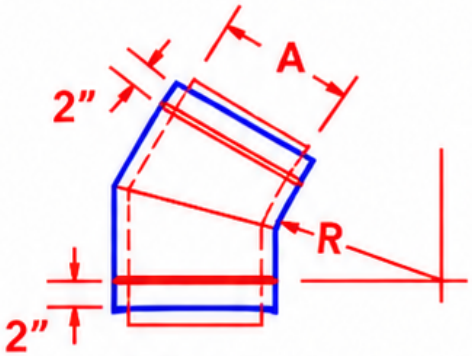

DE30
30° 2–PIECE ELBOW