Spiral Systems Incorporated

SINGLE WALL ROUND
Stock Pipe and Fittings

Spiral Systems Stock Galvanized Gauges

Diameter	Spiral Pipe Gauge	Fitting Gauge
03”-09”	26	22
10”-18”	26	24
20”	24	22
22”	24	22
24”	24	22

- All pipe is stocked in 10’-0” lengths.
- Even and odd sizes available 3” through 9”, even sizes only available 10” through 24”.
- All stock fitting seams are spot welded and sealed with high-pressure duct sealant.
- All stock pipe and fittings are fabricated from G-90 or G-60 galvanized sheet steel meeting ASTM A-653 standards.
- All stock elbows have a centerline radius equal to 1-1/2 times the diameter.
- 3” thru 9” elbows are die-formed elbows, elbows 10” and larger are gored in accordance with SMACNA, 1995.
- Stocking items include: spiral pipe, 45 and 90 degree elbows, couplings, reducers, end caps/plugs, bell mouths, and start collars.
- Stock pipe and fittings are rated for (+) positive 10” W.G. and (-) negative 2” W.G. per SMACNA, 1995.

Spiral Systems Incorporated

SINGLE WALL ROUND
Positive Pressure Gauges

POSITIVE PRESSURE
SPIRAL DUCT & FITTING CONSTRUCTION STANDARDS

- Galvanized
- Paint Grade
- PVC Coated
- Stainless Steel

Diameter	+2" W.G.		+4" W.G.		+10" W.G.	
	Spiral Pipe	Fittings	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" - 6"	26	26	26	26	26	26
7" - 8"	26	26	26	26	26	26
9" - 10"	26	26	26	26	26	26
11" - 12"	26	26	26	26	26	24
13" - 14"	26	26	26	24	26	24
15" - 16"	26	24	26	24	24	22
17" - 18"	26	24	24	24	24	22
19" - 26"	26	24	24	22	24	22
27" - 36"	24	22	22	20	22	20
37" - 50"	22	20	20	20	20	20
51" - 60"	20	18	18	18	18	18
61" - 84"	18	16	18	16	18	16

Spiral Systems Incorporated

SINGLE WALL ROUND
Negative Pressure Gauges

NEGATIVE PRESSURE
SPIRAL DUCT & FITTING CONSTRUCTION STANDARDS

- Galvanized
- Paint Grade
- PVC Coated
- Stainless Steel

	- 2" W.G.		- 4" W.G.		- 10" W.G.	
Diameter	Spiral Pipe	Fittings	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" - 8"	26	26	26	26	26	26
9"	26	26	26	26	26	24
10"	26	26	26	26	26	22
11" - 12"	26	26	26	24	24	22
13"	26	26	26	24	24	20
14"	26	24	24	22	24	20
15"	26	24	24	22	22	20
16"	26	24	24	22	22	18
17"	26	24	24	20	22	18
18" - 19"	24	22	24	20	22	18
20"	24	22	22	20	22	16
22"	24	20	22	18	22	16
24"	22	20	22	18	20	16
26"	22	20	20	18	20	18R4
28" - 30"	22	18	20	16	18	16R4
32"	20	18	20	16	18	16R4
34"	20	18	20	20R6	18	16R4
36"	20	16	20	20R6	18	16R4
38" - 42"	20	16	18	18R6	18R12	
44" - 48"	Consult factory for gauge requirements					

R = Reinforcement Ring (Angle Ring) R12=12' centers, R6=6' centers, R4=4' centers.

Spiral Systems Incorporated

SINGLE WALL ROUND
Aluminum Gauges and Underground PVC Coated Gauges

SINGLE WALL ROUND SPIRAL DUCT CONSTRUCTION STANDARDS

Aluminum 3003-H14

	+2" W.G.		-2" W.G.	
Diameter	Spiral Pipe	Fittings	Spiral Pipe	Fittings
3" - 8"	.025"	.025"	.032"	.032"
9" - 14"	.025"	.025"	.032"	.032"
15" - 26"	.032"	.032"	.040"	.040"
27" - 36"	.040"	.040"	.050"	.050"
37" - 50"	.050"	.050"	.063"	.063"
51" - 60"	.063"	.063"	.071"	.071"
61" - 84"	.063"	.063"	.090"	.090"

Underground PVC Coated Spiral Duct Gauges

	+/- 4" W.G.		Load Specifications	
Diameter	Spiral Pipe	Fittings	Diameter	Lbs/ lin. ft.
3" - 8"	26	24	3" - 8"	400
9" - 14"	24	22	9" - 12"	600
15" - 26"	22	20	13" - 26"	1800
27" - 36"	20	18		
37" - 50"	18	16		

Spiral Systems Incorporated

SINGLE WALL ROUND

Spiral Pipe and Fittings
Material & Fabrication Options

Material Options	Gauges	Fitting Construction
Galvanized Steel G90 – G60, ASTM 527-1	▪ Pipe: 26 GA to 16 GA ▪ Fittings: 24 GA to 16 GA	▪ Spot welded and sealed ▪ Continuously welded
Paint Grade	▪ Pipe: 26 GA to 16 GA ▪ Fittings: 24 GA to 16 GA	▪ Spot welded and sealed ▪ Continuously welded
Aluminum 3003-H14	▪ Pipe: .025" to .063" ▪ Fittings: .032" to .090"	▪ Spot welded and sealed ▪ Continuously welded
PVC Coated (4 mil x 1 mil) (Polyvinyl-Chloride-Coated Galvanized Steel)	▪ Pipe: 26 GA to 16 GA ▪ Fittings: 24 GA to 16 GA	▪ Mechanically Fastened & Sealed
PVC Coated (4 mil x 4 mil) (Polyvinyl-Chloride-Coated Galvanized Steel)	▪ Pipe: 26 GA to 16 GA ▪ Fittings: 24 GA to 16 GA	▪ Mechanically Fastened & Sealed
Stainless Steel (Type 304-2B or 316-2B)	▪ Pipe: 26 GA to 18 GA ▪ Fittings: 24 GA to 16 GA	▪ Spot welded and sealed ▪ Continuously welded

- Standard fittings are spot welded and sealed with high-pressure water based duct sealant.
- Standard single wall pipe and fitting construction is slip joint. All pipe being female and all fittings being male.
- Fully welded fittings are available. (Except PVC coated)
- Pipe and fittings are available from 3" round to 96" round.
- Standard pipe length is 10'-0", other length are available as required.

All fittings and spiral pipe are fabricated per SMACNA HVAC Duct Construction Standards, Second Edition, 1995.


Spiral Systems Incorporated


860 Old Hwy 51
Nesbit, MS 38651

399 Old Hickory Blvd,
Old Hickory, TN 37138

Phone: 1-662-429-0373

SINGLE WALL ROUND *Manifolding*

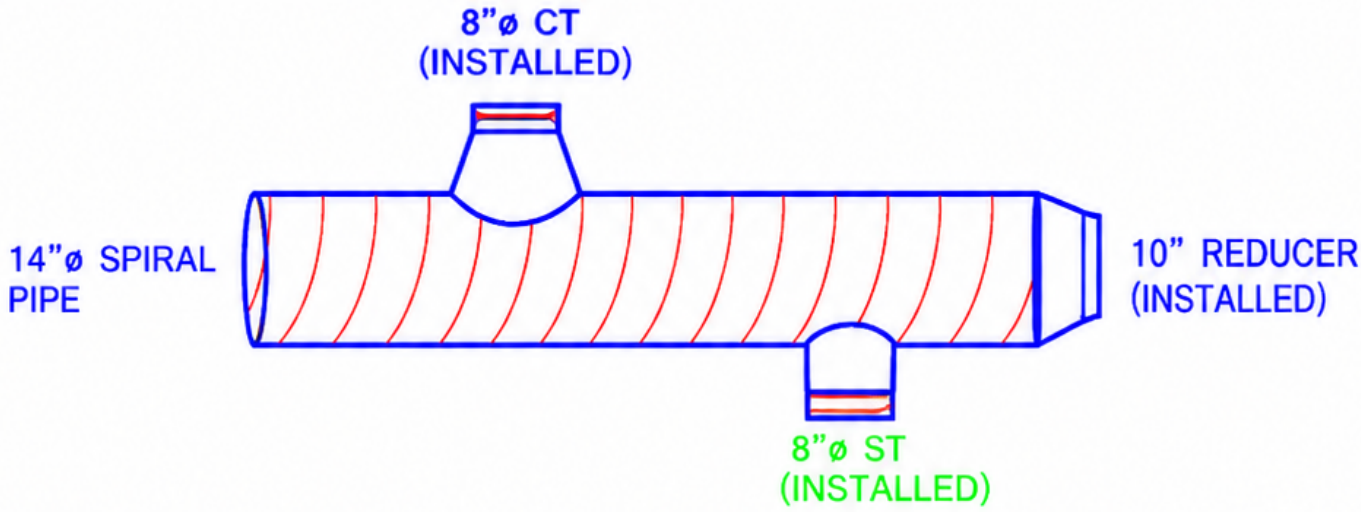

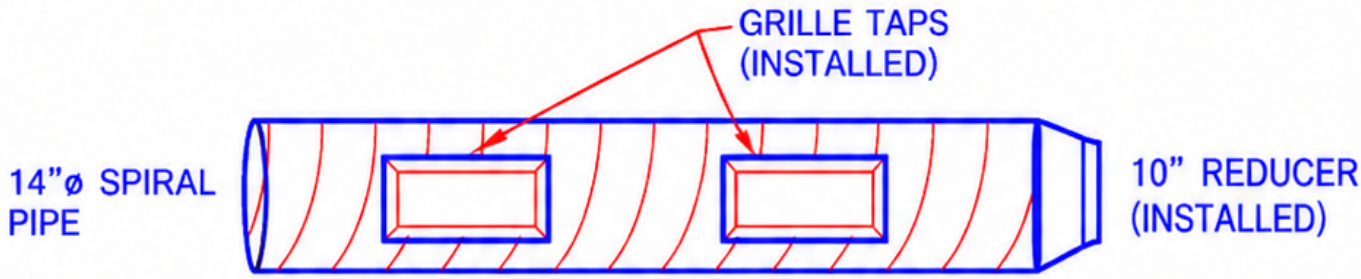

MANIFOLD SPIRAL PIPE

- REDUCES INSTALLATION COST
  - ELIMINATES A MAJORITY OF THE PIPE / FITTING CONNECTIONS.
  - ROUND SECTIONS AVAILABLE IN LENGTHS UP TO 20'-0".
  - ALL MANIFOLDED SECTIONS ARE NUMBERED AND COLOR-CODED BY FLOOR OR AHU.
  - FACTORY INSTALLED FLANGES ARE AVAILABLE.
- TAPS ARE INSTALLED ON THE PIPE AS SPECIFIED BY THE DRAWING.
- MANIFOLDING REDUCES DUCT LEAKAGE BY ELIMINATING THE NUMBER OF JOINTS.
- STANDARD TAPS ARE TACK WELDED AND SEALED.
  (CONTINUOUSLY WELDED TAPS ARE AVAILABLE)