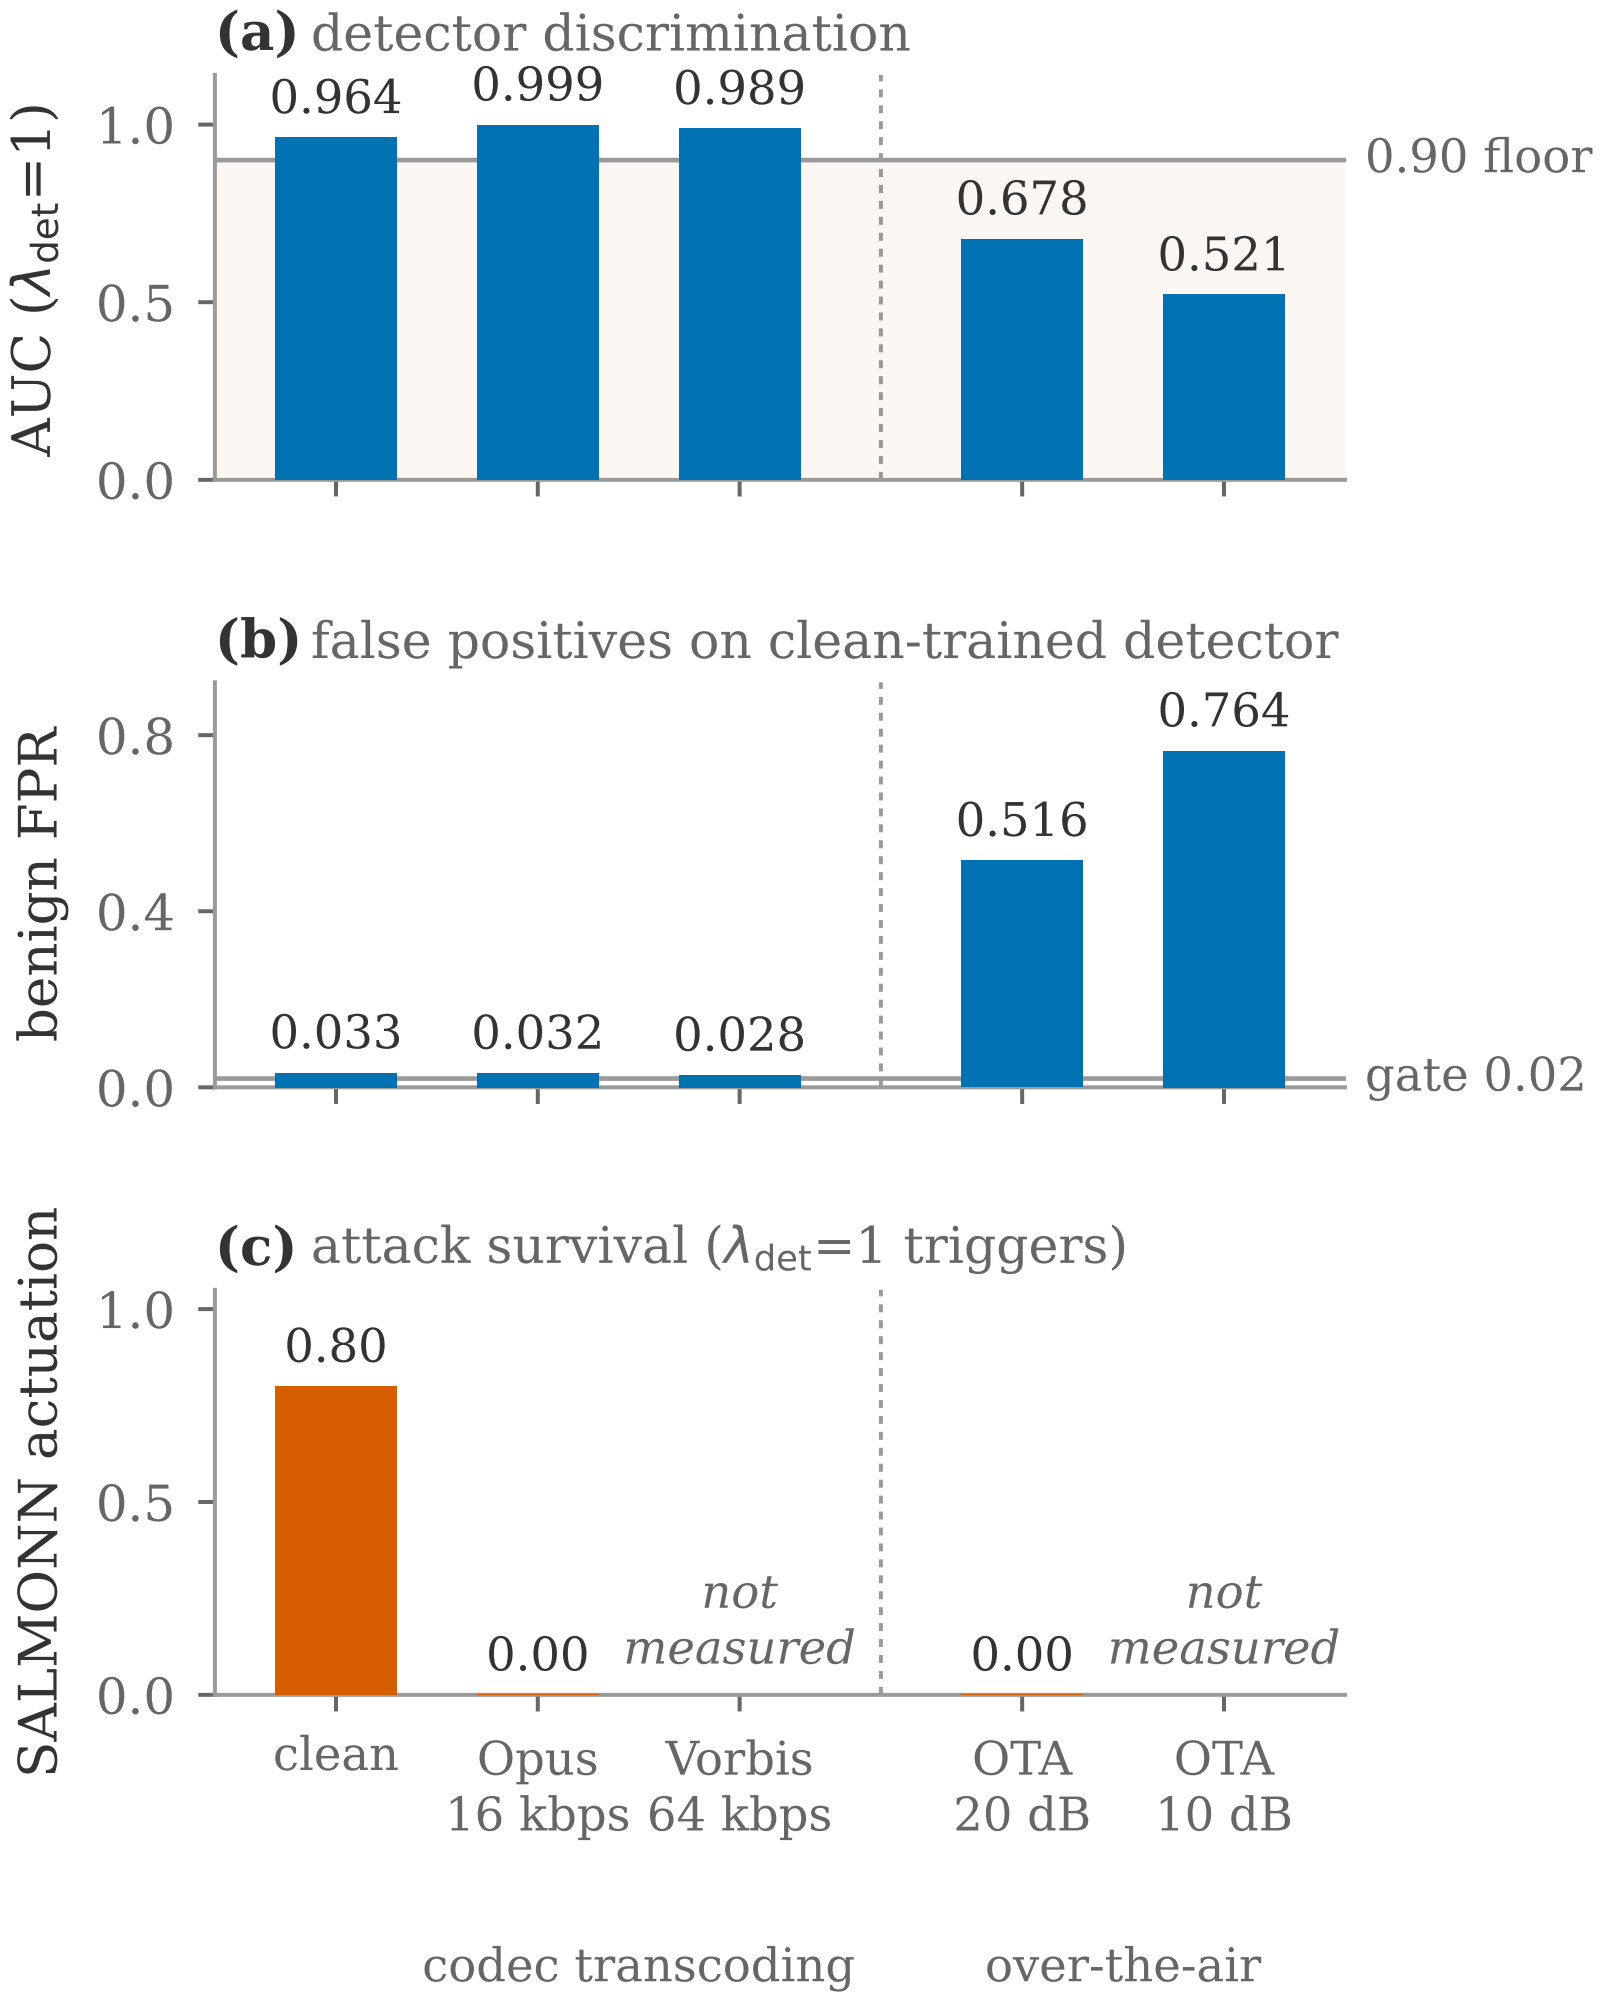
(a) detector discrimination
AUC (λ_{det}=1)
1.0
0.5
0.0
0.964
0.999
0.989
0.678
0.521
0.90 floor
(b) false positives on clean-trained detector
benign FPR
0.8
0.4
0.0
0.033
0.032
0.028
0.516
0.764
gate 0.02
(c) attack survival (λ_{det}=1 triggers)
SALMONN actuation
1.0
0.5
0.0
0.80
0.00
not measured
0.00
not measured
clean
Opus 16 kbps
Vorbis 64 kbps
OTA 20 dB
OTA 10 dB
codec transcoding
over-the-air