

Final Report

Dante Buhl

June 11, 2024

Question 1: Bessels Function Solution

$$\begin{cases} U_t = \nu \left(U_{rr} + \frac{1}{r} U_r \right) & r \in [1, 3], \quad t \geq 0 \\ U(r, 0) = 15(r - r_1)^2(r_2 - r)^2 e^{-\sin(2r) - r} \\ U(1, t) = 0 \\ U(3, t) = 0 \end{cases} \quad (1)$$

$$r_1 = 1, \quad r_2 = 3, \quad \nu = \frac{1}{4} \quad (2)$$

- a) Plot the solution keeping 60 modes of the bessels function expansion at times 0, 0.5, 1, 2. As seen in figure 1, the solution decays in time as expected from a heat equation in cylindrical coordinates since the heat seems to dissipate faster on the outer rim of the cylinder, which is typical since there is more surface area on the outer rim.

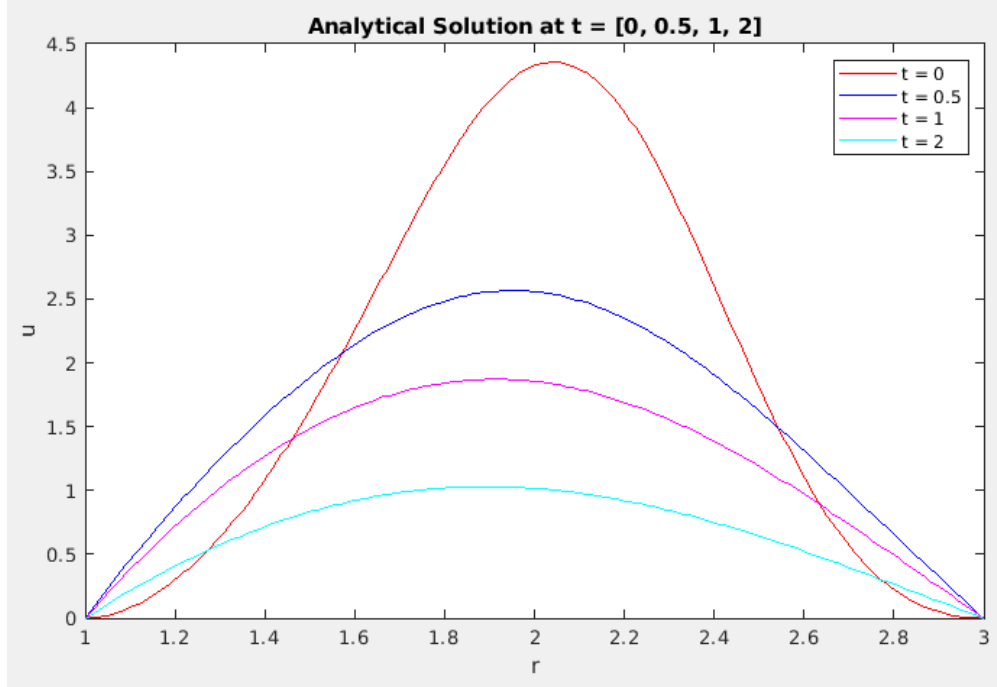


Figure 1: Plot of Truncated Bessels Solution at $t = [0, 0.5, 1, 2]$

- b) In figure 2, the basis functions \hat{R}_n can be seen for values $n = [1, 2, 4, 6]$. As we can see the number of nodes for each function is equal to $n + 1$ as it should be. We can also see that all functions have zeros at the endpoints of the domain which is lovely. In figure 3, a plot of the normalizing factor can be seen to increase with mode number.

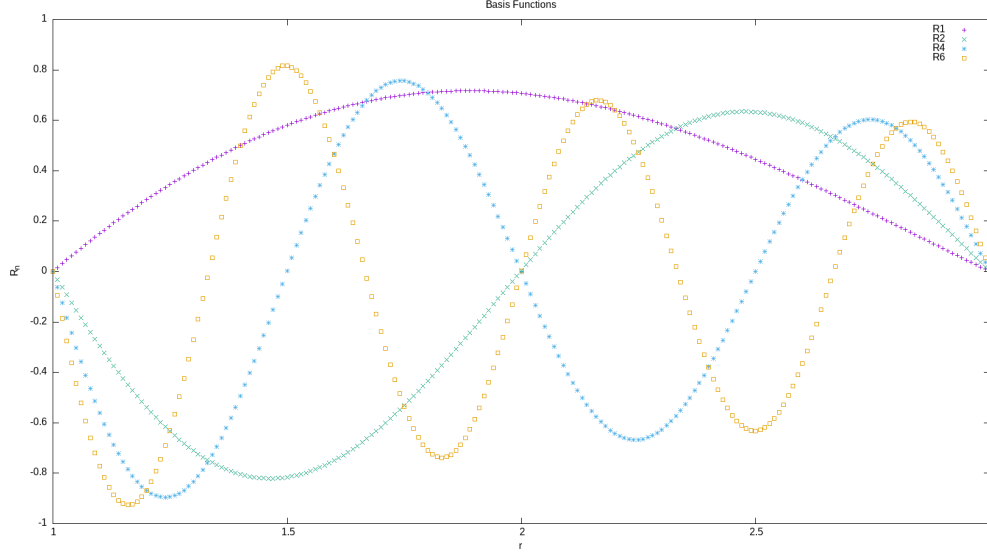


Figure 2: Plot of 4 of the basis functions, R_1, R_2, R_4, R_6 .

Question 2: Finite Differences Solution

a) Write the matrix M explicitly

$$M = \nu D_2 + \nu \frac{1}{r} D_1$$

Where D_1 and D_2 are the standard second order finite difference differentiation matrices (non-periodic).

$$M = \nu \begin{bmatrix} \frac{-2}{\Delta r^2} & \frac{1}{\Delta r^2} + \frac{1}{2r\Delta r} & 0 & 0 & \cdots \\ \frac{1}{\Delta r^2} - \frac{1}{2r\Delta r} & \frac{-2}{\Delta r^2} & \frac{1}{\Delta r^2} + \frac{1}{2r\Delta r} & 0 & \cdots \\ 0 & \frac{1}{\Delta r^2} - \frac{1}{2r\Delta r} & \frac{-2}{\Delta r^2} & \frac{1}{\Delta r^2} + \frac{1}{2r\Delta r} & \cdots \\ 0 & 0 & \frac{1}{\Delta r^2} - \frac{1}{2r\Delta r} & \frac{-2}{\Delta r^2} & \ddots \\ \vdots & \vdots & \vdots & \ddots & \ddots \end{bmatrix}$$

- b) Compute the spectral radius of M . This is done using an eigenvalue solver, I use LAPACK's DGEEV routine for general, non-symmetric matrices. I find that the spectral radius increases with n/k .
- c) Find the critical value of dt according to the problem. It can be seen in figure 5 that Δt^* decreases in order 2 with respect to the number of gridpoints. Seen in the plot along side the data in purple is an order 2 decay line in green and an order 3 decay line in blue. It is very clear that the purple line is nearly parallel with the green one indicating order 2 decay in Δt^* .

Proof. First we must show that the conditional absolute stability of this scheme. **come back and finish this** □

- d) Integrate using AB3 and plot the maximum pointwise error. As seen in figure 6, the Maximum pointwise error seems to decline as the gridsize increases. Note that all 4 lines plotted start at essentially the same value of error and quickly diverge into different orders of accuracy. It should also be noted that the inherent error in the system at $t = 0$ is around the order of 10^{-3} or 10^{-4} with only 60 bessels modes.

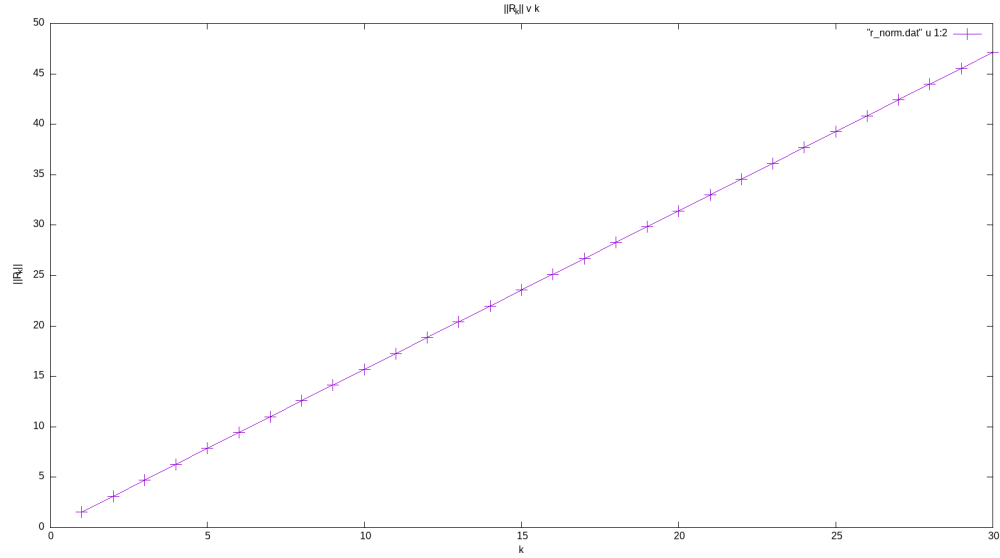


Figure 3: Normalizing Factors $\|\hat{R}_k\|_{L^2_w}$ versus k

- e) Plot the final error as a function of times. It can be seen in figure 7, that the maximum pointwise error at $t = 2$ is dependent on the gridsize. It can be seen in the plot that compared with order 2 decay (the green line), that this error decays with order 2 in the gridsize.

Question 3: Prove Second Order Accuracy in Δr

a)

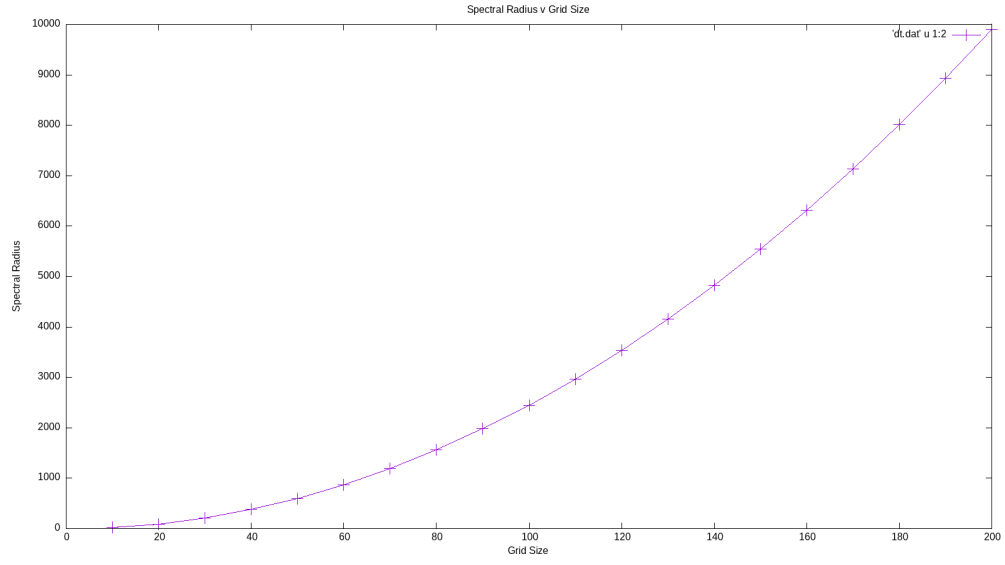


Figure 4: Plot of $\rho(M)$ versus gridsizes

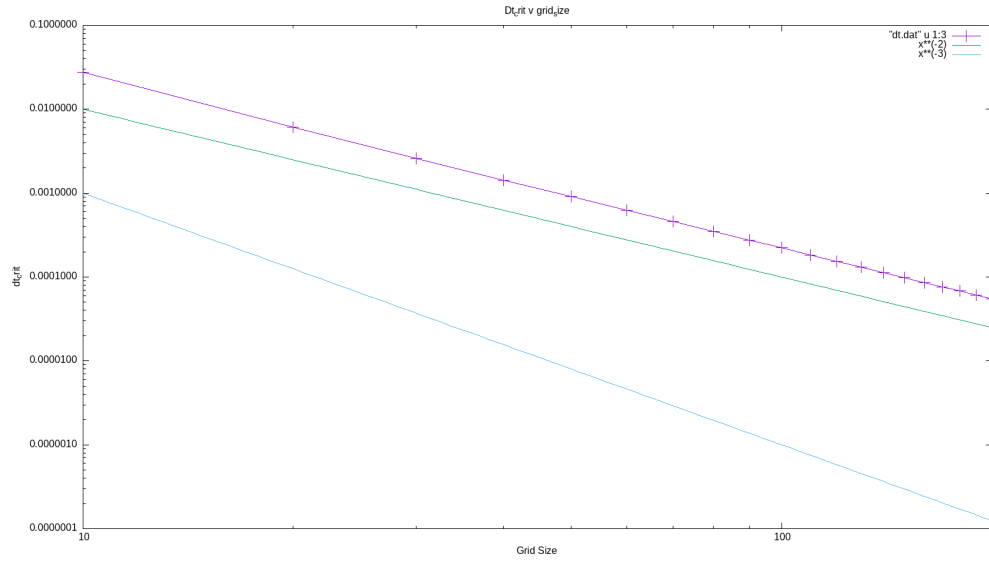


Figure 5: Plot of Δt^* versus gridsizes

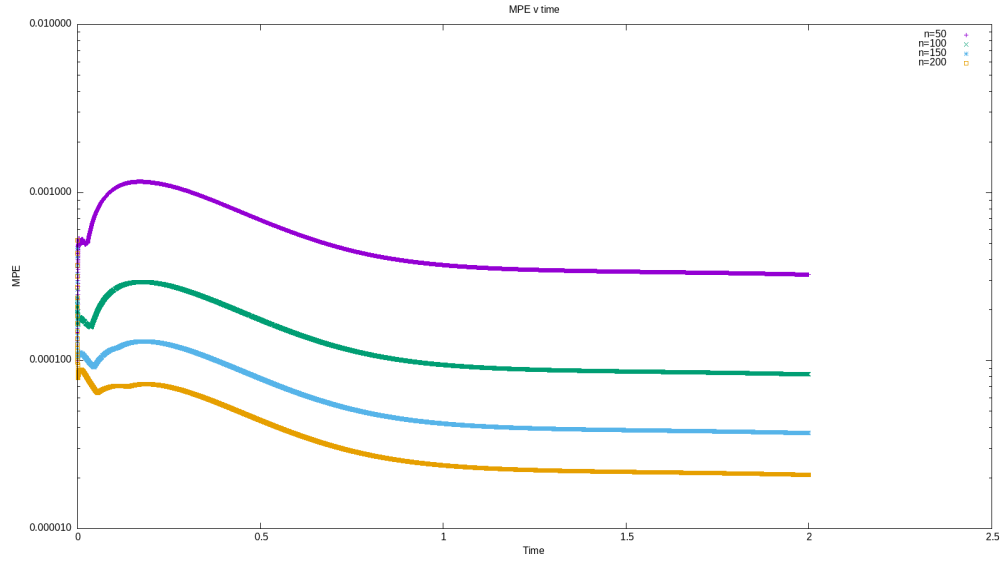


Figure 6: Maximum Pointwise Error between Truncated Solution and Numerical Solution

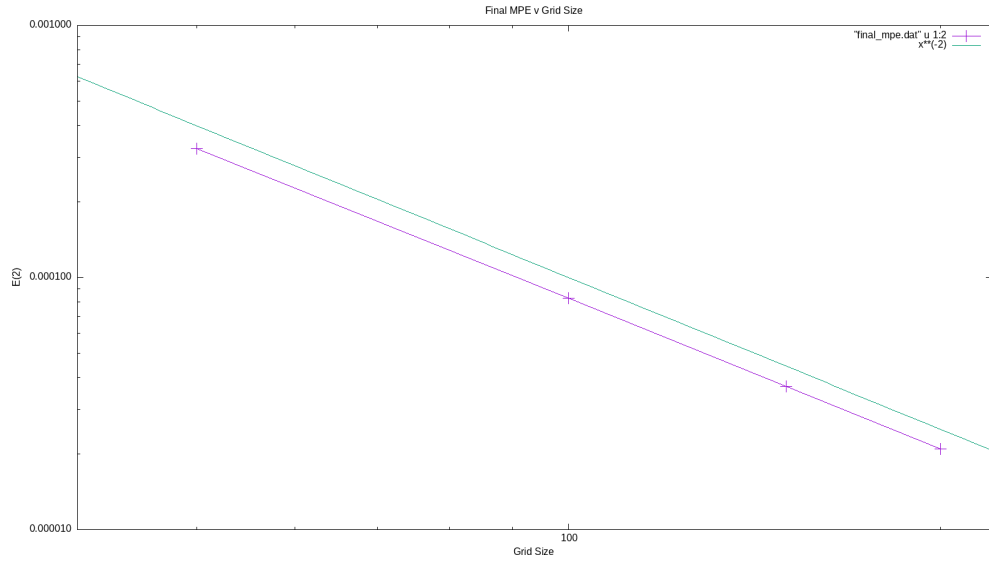


Figure 7: Plot of $e_n(2)$ versus n alongside n^{-2}