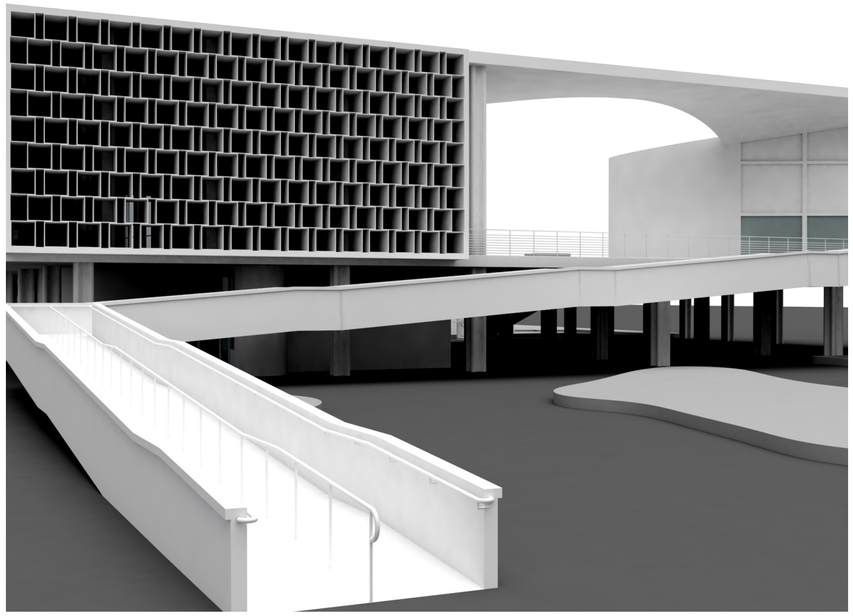

15

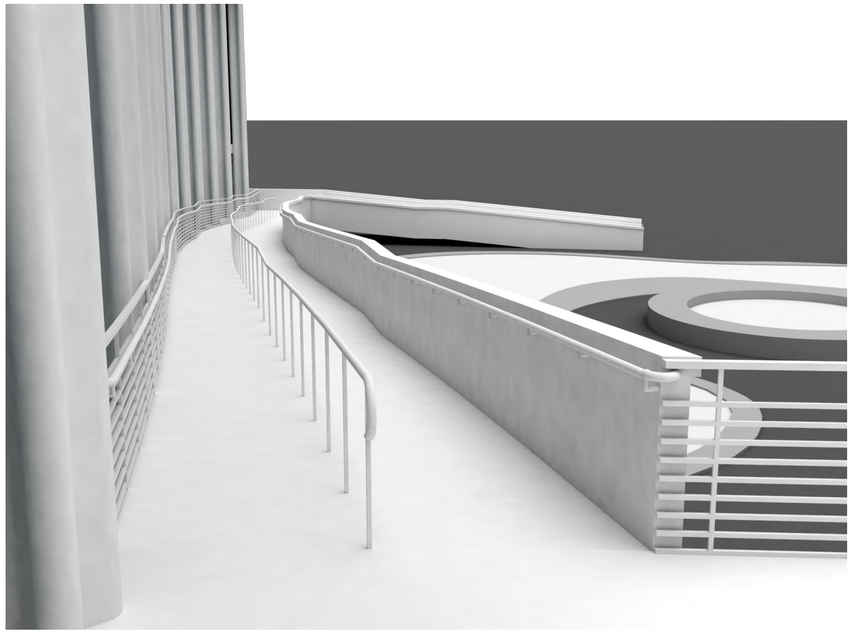

16

17

18

CODE ANNOTATION - CONTINUED

15. EGRESS RAMP 2 - SOUTHWEST VIEW. ADHERES TO RAMP GUIDELINES IN SECTION 1010. RAMP WIDTH 86”, SEPARATED BY MIDDLE HANDRAIL PER 1012.4 TO MAINTAIN 30” DISTANCE FROM RAIL AT ALL TIMES PER 1012.8.

16. EGRESS RAMP 1 - WEST VIEW. ADHERES TO RAMP GUIDELINES IN 1013. ADHERES TO GUARD GUIDELINES IN 1013. RAMP WIDTH 90”, SEPARATED BY MIDDLE HANDRAIL. HANDRAIL CONTINUITY IS MAINTAINED BY PLACING SUPPORTS EXTENDING FROM UNDERNEATH RAIL TO INTERSECT CONCRETE OR METAL GUARD. HANDRAIL ENDS ARE COMPLIANT WITH 1012.5. HANDRAILS ARE ADDITIONALLY COMPLIANT WITH 1012.6, MAINTAINING A CONSISTENT 3” OFFSET FROM GUARD OR WALL.

17. EGRESS STAIR 2 - SOUTH EAST VIEW. EXTERIOR STAIR. ADHERES TO HANDRAIL GUIDELINES IN 1012. STAIR WIDTH 96”, SEPARATED BY MIDDLE HANDRAIL. STAIRS CONTAIN A 48” LANDING AT MIDDLE OF 13’-6” RISE TO ADHERE TO 1009.4.

18. EGRESS STAIR 1 - SOUTH WEST VIEW. ENCLOSED INTERIOR STAIR, OPENS ON TO OUTSIDE GROUND FLOOR.

MEANS OF EGRESS
(STAIRS & RAMPS)

ASSIGNMENT 2
PAGE: 4 OF 4

48-215 MATERIALS & ASSEMBLY
SPRING 2017

INSTRUCTOR: DAMIANI

DAN CASCAVAL