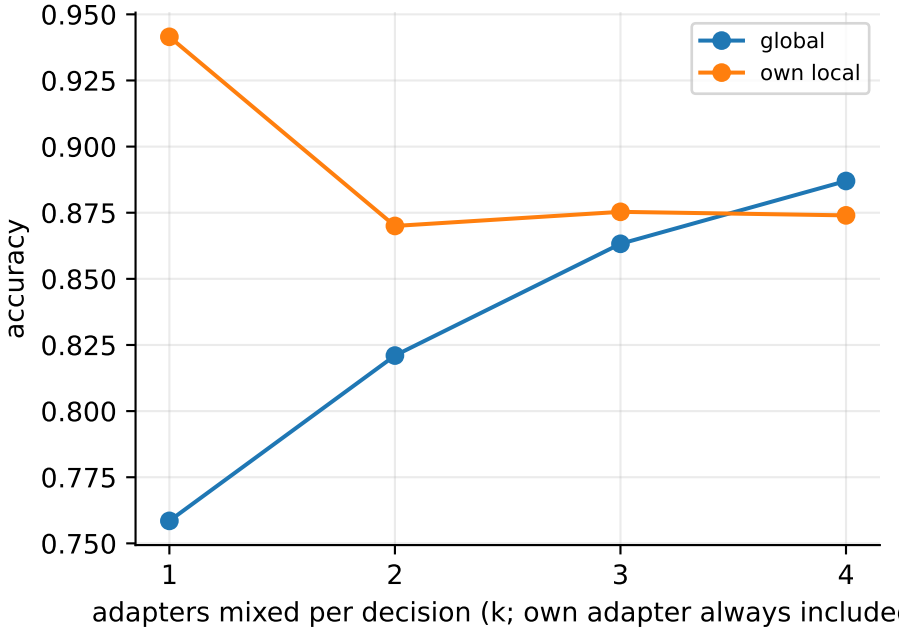
0.950
0.925
0.900
0.875
0.850
0.825
0.800
0.775
0.750
accuracy
global
own local
1
2
3
4
adapters mixed per decision (k; own adapter always included)

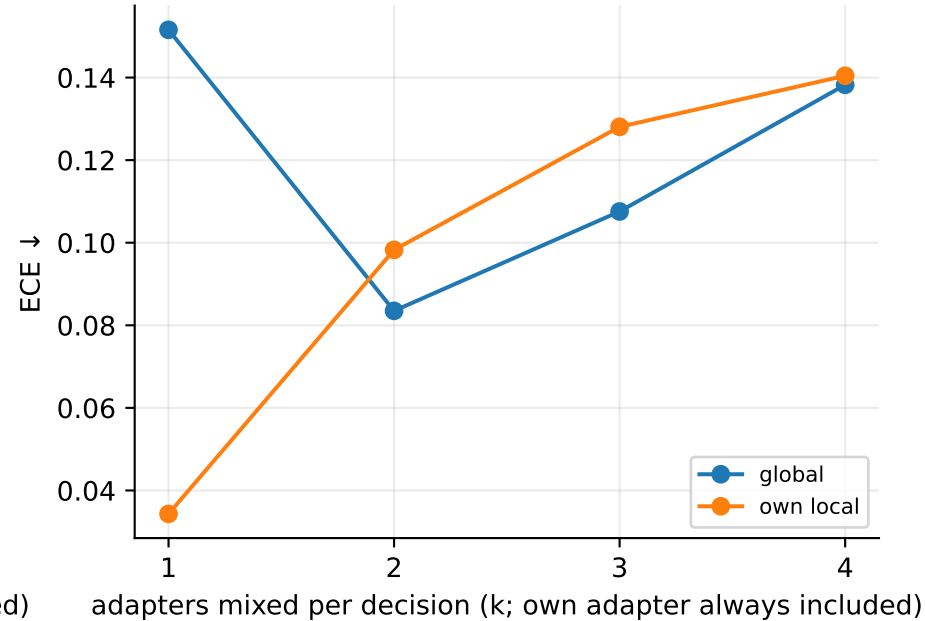
0.14
0.12
0.10
0.08
0.06
0.04
ECE ↓
global
own local
1
2
3
4
adapters mixed per decision (k; own adapter always included)