iWater

Intelligent. Sensing. Dosing. Control.

Product catalogue
2027

Table of contents

Introduction 4

Benefits 5

Product portfolio overview 6

Controllers 9

- i-Water One Series 10
  - i-Water One 11
  - i-Water One-D 12
  - i-Water One-T 14
- i-Water Prime Series 16
- i-Water Prime Series Controllers 17
  - i-Water Prime Pro 18
  - i-Water Prime Pro Plus 19
  - i-Water Prime Advance 20
  - i-Water Prime Advance Plus 21

Modular Control Boards 30

Sensors 33

Dosing Pumps 49

i-Water Online 53


- i-Water Online for pool pro 54

Filters 59

Water Treatment Liquids 71

- HeatCover 82

Pricing and ordering 84

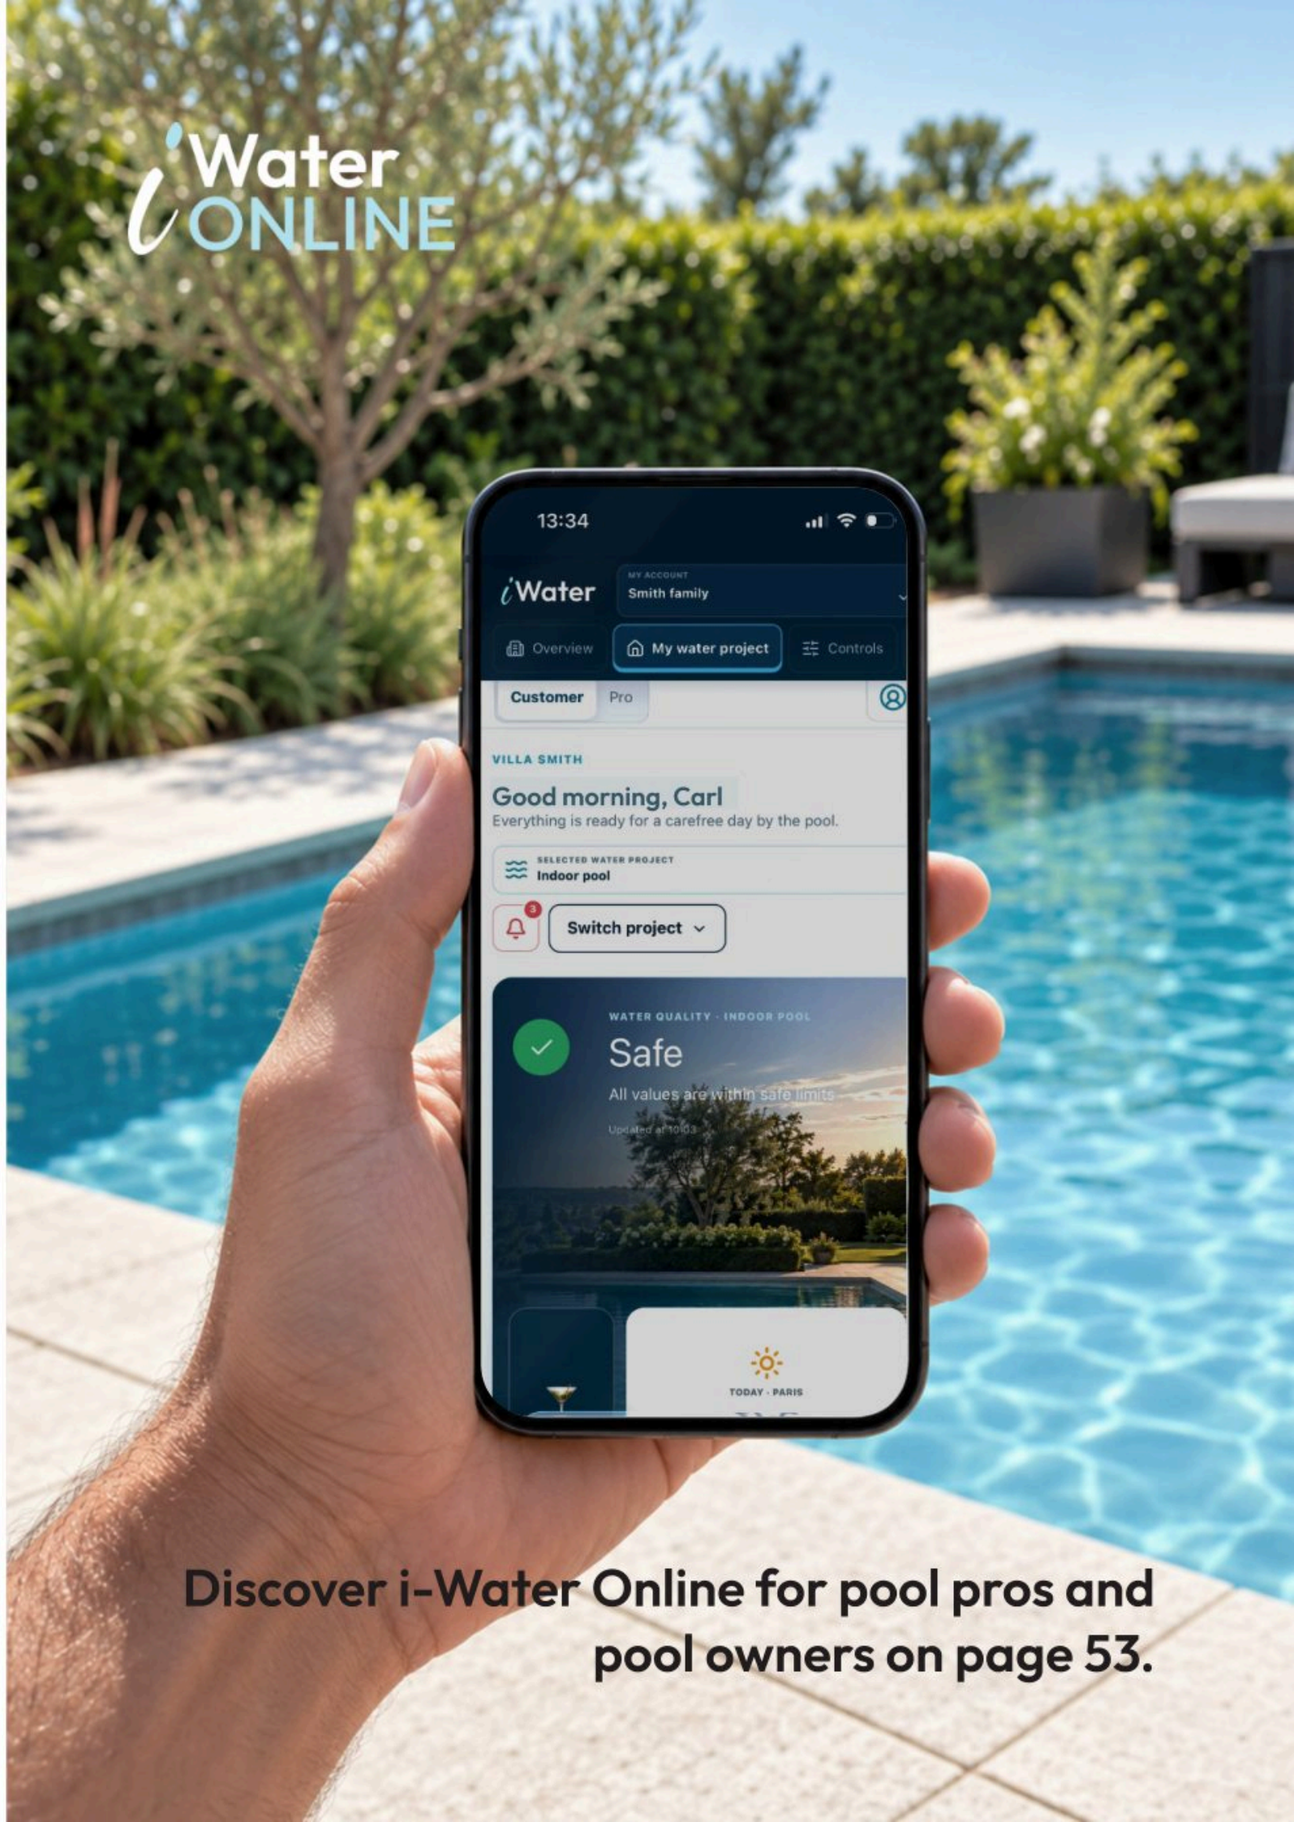

Discover i-Water Online for pool pros and pool owners on page 53.

Introduction

i-Water is a Belgian water-treatment technology company that combines intelligent sensing, automated control, precision dosing and purpose-developed treatment liquids into one integrated solution.

Rather than supplying individual chemicals or equipment, i-Water provides a coordinated water-treatment ecosystem in which sensors measure a comprehensive set of water parameters, the controllers evaluate the water condition, dosing pumps automatically deliver the required liquid treatment, and the system continues monitoring the water response.

The technology can be applied in new installations and existing plant rooms across professional swimming pools, ponds and lakes, as well as industrial and wastewater applications.

The portfolio of liquid products help solve specific water-management challenges including alkalinity stability, phosphate reduction, clarification, flocculation, TDS treatment, ion balance and biological water maintenance.

In simple terms:

i-Water turns conventional water treatment into an intelligent, monitored and automated process—giving professionals more control and confidence in the performance of their water systems.

Patent : 1WAT-001-BE-WO (Measurement of Alkalinity)

Benefits

Improved water quality

- Stabilize Alkalinity (patented).
- Reduce fluctuation of pH.
- Reduce consumption of Chlorine.
- Reduce growth of algae = clear water.
- Reduce water evaporation.
- Reduce energy for heating or cooling the pool.
- Reduce maintenance effort and costs.

Intelligent software

- More control due to intelligent analyses of water parameters
- More options to connect and integrate other pool technology (Modbus ready)
- Always connected so live monitoring of every pools' status

A comprehensive portfolio

- Hardware, software and liquids have been designed in such a way that they perfectly match
- For every pool a solution
- Valuable and unique side products like HeatCover – liquid pool cover
- Attractively priced filters

Application in various types of pools

- For pools, ponds, lakes and industrial water reservoirs
- For private, commercial and public pools

Product portfolio overview

Sensing & dosing

i-Water One Series

The i-Water One Series is a modular sensing, dosing and plant-room control platform designed to give professional water-treatment installations the level of automation they actually need.



i-Water Prime Series

i-Water Prime is a more elaborate control platform for installations that require more than water sensing and dosing.



i-Water Sensors

Form the measurement layer of the i-Water ecosystem, continuously monitoring important water-quality and system parameters, allowing monitoring of conditions and responses when adjustment is required.

i-Water Dosing pumps

The i-Water Dosing Pumps are designed to deliver accurate and consistent chemical dosing. They use stepper-motor technology, selected for precise control, long service life and easy maintenance.

i-Water Online platform

i-Water Online brings monitoring, control and system management into one connected platform. From water quality and equipment status to maintenance, covers and lighting, users can see what is happening and take action remotely.

Liquids

A comprehensive range of innovative liquid treatment solutions designed to improve water quality, maintain balanced water chemistry, and keep water clear, clean, and healthy.

At i-Water we produce in house and our products are developed to work individually or as part of a complete automated water treatment system, providing reliable performance for a wide variety of applications. By combining advanced chemistry with intelligent monitoring and dosing technology, i-Water helps ensure consistent water quality.



Filters

i-Water filters use a solid polypropylene filter vessel, designed for strength and resistance in demanding pool and water-treatment environments. Polypropylene filter tanks are widely used because they are corrosion-resistant, chemically resistant and suitable for fresh, salt and treated water applications. Reliable Filtration with Sand or Glass Media.



Filters

The Invisible Liquid Pool Cover

Reduce evaporation. Save water. Reduce energy.



Controllers

i-Water One Series

The i-Water One Series is a modular sensing, dosing and plant-room control platform designed to give private water-treatment installations the level of automation they actually need. i-Water allows the system to be selected around the actual treatment requirements.

Range overview

	Main features.	Private / Public pool project	Existing / New pool project
i-Water One	Flexible configuration. The Core + Options. Option : multiple sensing parameters (add-on boards) Option : connect external dosing pumps Modbus, wifi and bluetooth included	Private & Public pools	New or Existing (as extension of existing or replacement of old equipment)
i-Water One-D	Standard Configuration. Plug. Play. Sensing. Dosing. Control. 2 dosing pumps included Modbus, wifi and bluetooth included	Private & small public pools	New or Existing (as replacement of old equipment)
i-Water One-T	Standard Configuration. Plug. Play. Sensing. Dosing. Control. 3 dosing pumps included Modbus, wifi and bluetooth included	Private & small public pools	New or Existing (as replacement of old equipment)

The Core (main PCB) : Besides sensing and dosing, all three systems share the same intelligent control concept that can manage : pump and backwash, water level, water-meter monitoring, temperature monitoring, turnover, flow rate, control of water flows, pressure sensors and overflow.

The modular approach makes the range suitable for both existing installations and new plant rooms.

Benefits

AI INTELLIGENCE
AI intelligence and water-saving technology

INTEGRATION OPTIONS
Modbus

FLEXIBLE CONNECTIVITY
Wifi and Bluetooth connections

COMPATIBLE WITH EXISTING PLANTROOM EQUIPMENT
can be used to extend and integrate with existing equipment

ONE CENTRAL CONTROLLER
To manage pump and backwash control, level control, water-meter monitoring, temperature monitoring and overflow control.

i-Water One

i-Water One is our flexible standalone system for water quality monitoring and process control, suitable for New and existing pools and large public swimming facilities. Multiple modules can be combined within a single cabinet to match the needs of each installation.

Its versatility makes i-Water One easy to integrate into a wide range of installations. With the right modules and connections in place, it can manage everything from measurement and dosing to pumps, lighting and other automated processes.



Customised System
Advanced Installation

- retrofit (installations where dosing pumps are already present in the plant room)
- pumps being separately positioned next to the control box
- customization (it allows for multiple sensing or multiple pool projects to be integrated to the unit)


i-Water One is our flexible standalone system for water quality monitoring and process control, suitable for New and existing pools and large public swimming facilities. Multiple modules can be combined within a single cabinet to match the needs of each installation.

Its versatility makes i-Water One easy to integrate into a wide range of installations. With the right modules and connections in place, it can manage everything from measurement and dosing to pumps, lighting and other automated processes.





i-Water One-D



Standard System
Easy Installation

The “D” in i-Water One-D stands for Dual Dosing. One-D incorporates two dosing pumps directly into the control box, creating a standard configuration which is easy to use (plug & play).

The system is available in five fixed configurations, identified by colour according to the required disinfection treatment. This allows the client or system designer to select the One-D version according to the two parameters or treatment functions required for the project. For example, an installation requiring pH and free-chlorine control would use the green configuration, while a system requiring pH and alkalinity control would use the blue configuration.

- Blue : pH / Alka+
- Yellow : pH / ORP
- Green : pH / Free Chlorine
- Purple : pH / H_2O_2
- Red : pH / Bromine



Blue — pH / Alka+ (patented)

The blue configuration combines pH management with i-Water alkalinity control, helping maintain stable water chemistry and reducing fluctuations in pH.

Controls: pH / Alka+

Ideal for: installations where maintaining stable alkalinity is an important part of the treatment strategy.



Green — pH / Free Chlorine

The green configuration combines pH monitoring with Free Chlorine (FCL) measurement, giving the controller direct information about the concentration of available chlorine in the water.

Controls: pH / Free Chlorine

Ideal for: installations requiring direct monitoring and automatic control of free-chlorine levels.



Red — pH / Bromine

The red configuration combines automatic pH management with bromine treatment control.

Controls: pH / Bromine

Ideal for: swimming pools and other water systems using bromine as their selected disinfectant.



Yellow — pH / ORP

The orange configuration monitors pH and ORP/Redox. ORP indicates the oxidizing/disinfection condition of the water and allows the system to control the associated disinfectant treatment accordingly.

Controls: pH / ORP / Redox

Ideal for: conventional automated disinfection systems where treatment is controlled according to the measured ORP value.




Purple — pH / H_2O_2

The purple configuration is designed for systems using hydrogen peroxide (H_2O_2) as part of the water-treatment programme.

Controls: pH / H_2O_2

Ideal for: water-treatment installations based on hydrogen-peroxide dosing.

i-Water One-T



Standard System
Easy Installation

The “T” in i-Water One-T stands for Triple Dosing. One-T incorporates three dosing pumps directly into the control box, creating a standard configuration which is easy to use (plug & play).

The system is available in five fixed configurations, identified by colour according to the required disinfection treatment. This allows the client or system designer to select the One-T version according to the three parameters or treatment functions required for the project. For example, an installation requiring pH, free-chlorine and i-Floc control would use the green configuration, while a system requiring pH+, pH- and alkalinity control would use the blue configuration.

- Blue : pH+ / pH− / Alka+
- Yellow : pH / ORP / i-Floc
- Green : pH / Free Chlorine / i-Floc
- Purple : pH / H_2O_2 / i-Floc
- Red : pH / Bromine / i-Floc



Blue — pH+ / pH− / Alka+

The blue One-T provides separate dosing for increasing pH, decreasing pH and correcting alkalinity, creating a comprehensive water-balance configuration.

Configuration: pH+ / pH− / Alka+

Ideal for: installations requiring precise control of both directions of pH adjustment together with automatic adjustment and control of Alkalinity



Green — pH / Free Chlorine / Alka+

The green One-T combines pH management, Free Chlorine monitoring/ control and correcting alkalinity, creating a comprehensive water-balance configuration.

Configuration: pH / Free Chlorine / Alka+

Ideal for: installations requiring direct control of free-chlorine concentration together with automatic adjustment and control of Alkalinity



Red — pH / Free Chlorine / i-Floc

The red One-T combines pH management, bromine treatment and i-Floc dosing within one integrated controller.

Configuration: pH / Bromine / i-Floc

Ideal for: automated disinfection systems that use Free Chlorine as the control parameter while also benefiting from continuous flocculant dosing to support filtration and water clarity.



Yellow — pH / ORP / Alka+

The orange One-T combines pH control, ORP/Redox-based disinfection control and correcting alkalinity, creating a comprehensive water-balance configuration.

Configuration: pH / ORP / i-Floc

Ideal for: automated disinfection systems that use ORP as the control parameter while also benefiting from continuous flocculant dosing to support filtration and water clarity.



Purple — pH / ORP / i-Floc

The purple One-T is configured for systems using hydrogen peroxide (H_2O_2) as part of the water-treatment programme, combined with pH control and i-Floc dosing.

Configuration: pH / ORP / i-Floc

Ideal for: automated disinfection systems that use ORP as the control parameter while also benefiting from continuous flocculant dosing to support filtration and water clarity.

i-Water Prime Series

i-Water Prime is the more elaborate control platform for private and commercial (public) installations that require more elaborate and advanced sensing, dosing and control tools.

The i-Water Prime series add an extended control board with additional inputs, outputs and power connections. This allows to manage not only water quality, but also pool equipment, covers, lighting and advanced disinfection technologies.

Range overview

	Main features	Private / Public pool project	Existing / New pool project
i-Water Prime Pro	Flexible configuration. The Core + Options.	Private & Public	New or Existing (as replacement of old equipment)
i-Water Prime Pro Plus	Flexible configuration. The Core + Options + Electric control cabinet The Core : see description below, including Modbus, wifi and bluetooth included Options : 1) 1 or 2 extension boards (per board 12 x relays normally open, + 4 x relays normally open/closed), 2) 2 – 4 integrated dosing pumps Electric control cabinet : integrated relay switches	Private	New or Existing (as replacement of old equipment)
i-Water Prime Advance	Standard configuration The Core + Roller cover control + Electrolysis and Hydrolysis control + Light control and 8 NO/NC output, 8 inputs, 4 x 4 - 20 mA input, safety input, storm sensor, key switch, level safety.	Private & Small public	New or Existing (as extension of existing or replacement of old equipment)
i-Water Prime Advance Plus	Standard configuration The Core + Roller cover control + Electrolysis and Hydrolysis control + Light control and 8 NO/NC output, 8 inputs, 4 x 4 - 20 mA input, safety input, storm sensor, key switch, level safety. + Electric control cabinet (integrated relays switches)	Private & Small public	New or Existing (as extension of existing or replacement of old equipment)

Benefits

ONE CENTRAL CONTROLLER
Water treatment and pool equipment work together.

EXPANDED AUTOMATION
More inputs, outputs and controllable equipment.

SMART COVER CONTROL
Integrate the roller cover, motor and safety inputs.

LIGHTING CONTROL
Manage up to four independent lighting groups.

ADVANCED DISINFECTION
Integrate hydrolysis and salt-water chlorination technologies.

FLOW PROTECTION
Protect connected treatment equipment when circulation is not confirmed.

MODBUS CONNECTIVITY
Communicate with compatible intelligent plant-room equipment.

BUILT FOR COMPLEX PROJECTS
Suitable where a standard controller no longer provides enough control capacity.

i-Water Prime Series Controllers



i-Water Prime Pro



i-Water Prime Pro Plus



i-Water Prime Advance



i-Water Prime Advance Plus

i-Water Prime Pro


Flexible configuration.

The Core + Options.

- The Core : see description below , including Modbus, wifi and bluetooth included
- Options : 1) 1 or 2 extension boards (per board 12 x relays normally open, + 4 x relays normally open/closed), 2) 2 – 4 integrated dosing pumps
- No integrated dosing pumps , instead it connects to compatible external i-Water dosing pumps. Pumps can be selected according to the required treatment. Ideal when dosing equipment is already installed.



- Suitable for retrofit and advanced custom installations.
- Additional treatment functions can be added as the project develops.

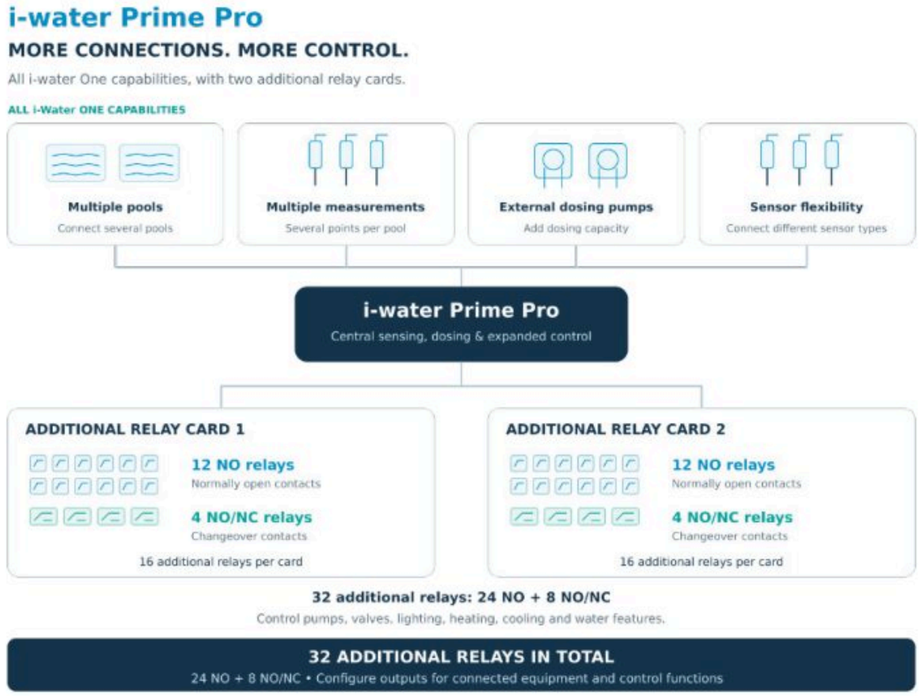

i-Water Prime Pro Plus

Flexible configuration.

The Core + Options.

- The Core : see description below , including Modbus, wifi and bluetooth included
- Options : 1) 1 or 2 extension boards (per board 12 x relays normally open, + 4 x relays normally open/closed), 2) 2 – 4 integrated dosing pumps
- No integrated dosing pumps , instead it connects to compatible external i-Water dosing pumps. Pumps can be selected according to the required treatment. Ideal when dosing equipment is already installed.
- Suitable for retrofit and advanced custom installations.
- Additional treatment functions can be added as the project develops.



Functional overview — typical electrical protection configuration


i-Water Prime Advance

Professional Control — Triple Dosing

Prime-T adds three integrated dosing pumps, providing greater treatment flexibility directly from one controller.

- 3 integrated dosing pumps
- Flexible dosing : each dosing pump can be assigned to the required treatment
- No predefined color-coded treatment combination
- Configured specifically for the requirements of the water installation
- Additional compatible dosing equipment can be integrated where required

Designed for more complex and demanding water-treatment projects

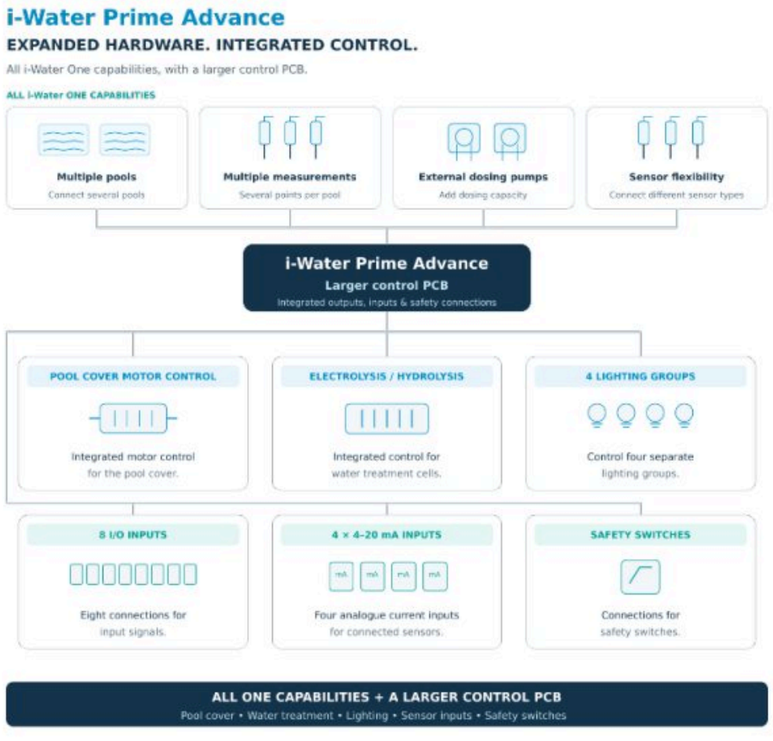


i-Water Prime Advance Plus

Professional Control

Prime-T adds three integrated dosing pumps, providing greater treatment flexibility directly from one controller.

- Option for 3 – 4 integrated dosing pumps
- Flexible dosing : each dosing pump can be assigned to the required treatment
- No predefined color-coded treatment combination
- Configured specifically for the requirements of the water installation
- Additional compatible dosing equipment can be integrated where required

Designed for more complex and demanding water-treatment projects

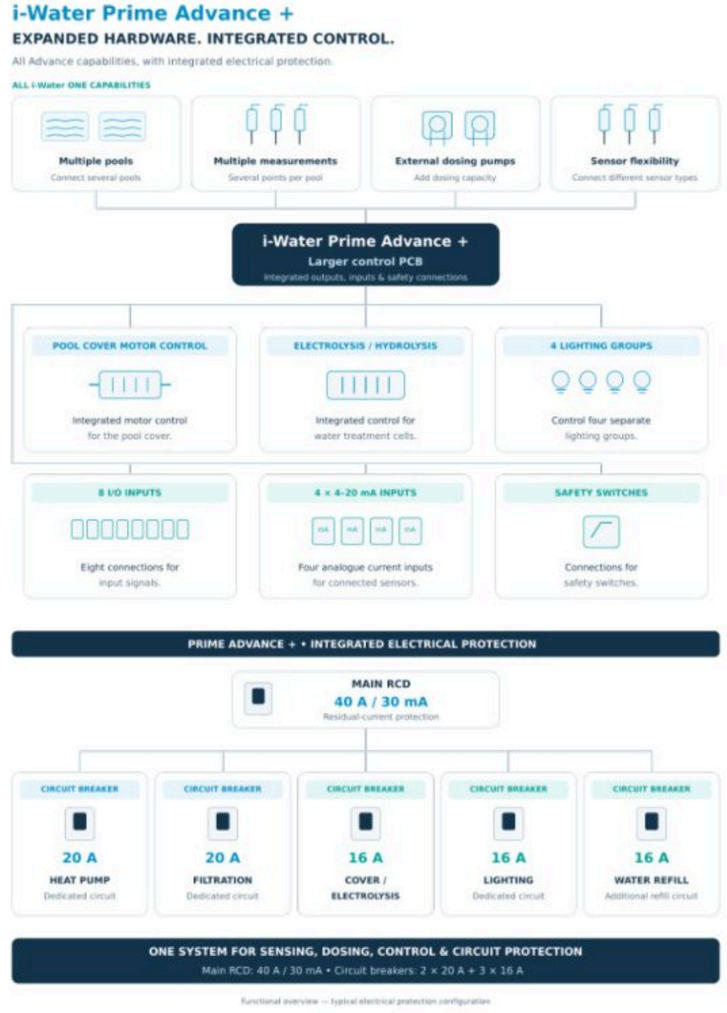


Functional overview — typical electrical protection configuration

Modbus & Equipment Communication

Prime provides dedicated Modbus RTU/RS485 communication channels for compatible equipment, including speed-control applications. The PCB architecture also includes dedicated variable-speed pump control modules.

Modbus RTU is an established industrial communication protocol designed to exchange operating data and commands between control devices, and RS485 is one of the most common physical communication interfaces used for Modbus serial networks.

Prime does not only switch equipment ON and OFF — it can communicate with compatible intelligent equipment and integrate it into the wider i-Water control system.

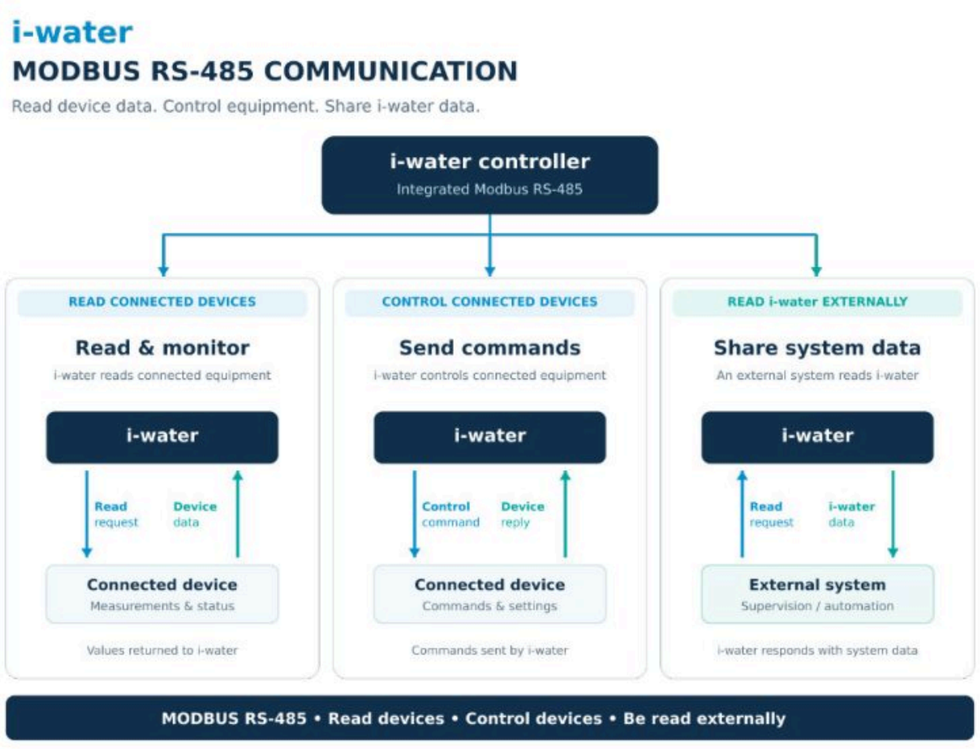


Flow Protection

Protecting equipment when water stops flowing

Prime and all One series includes dedicated flow-protection inputs, allowing a flow sensor or flow switch to become part of the safety logic of the system.

This is particularly important for treatment equipment such as electrolysis and hydrolysis cells, which depend on water circulating through the cell during operation.

Flow detected → Treatment can operate
No flow detected → Treatment equipment can be protected

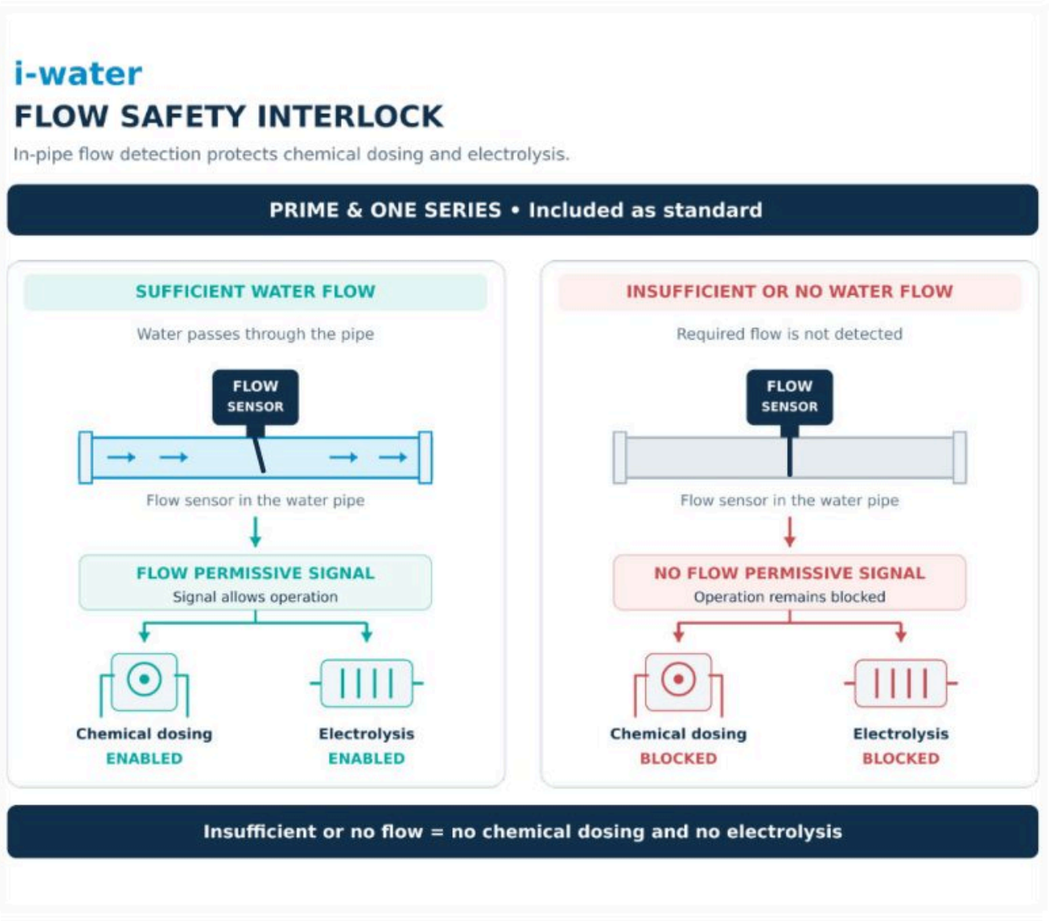

i-Water Pool Cover Control

Your pool cover, integrated into i-Water.


Prime can integrate a motorized roller cover directly into the pool-control system.

The i-Water documentation includes connection layouts for roller cover systems such as CoverEase and others, including the cover motor, RS485 communication, level sensing and emergency-stop connections. This allows the cover to become another intelligent part of the installation rather than a completely separate control system.

Open • Close • Monitor • Protect
When combined with i-Water Online, the connected cover can also form part of the remote pool-management experience.

Integrated control can include

- Centralized control through the i-Water system
- Visibility on App if opened/closed
- Standard 8 Auxiliaries to control water features and flows
- Expandable until 48 auxiliaries
- Roller-cover motor connection
- Open / Stop / Close commands
- Level-sensor integration
- Emergency-stop connection
- RS485 communication

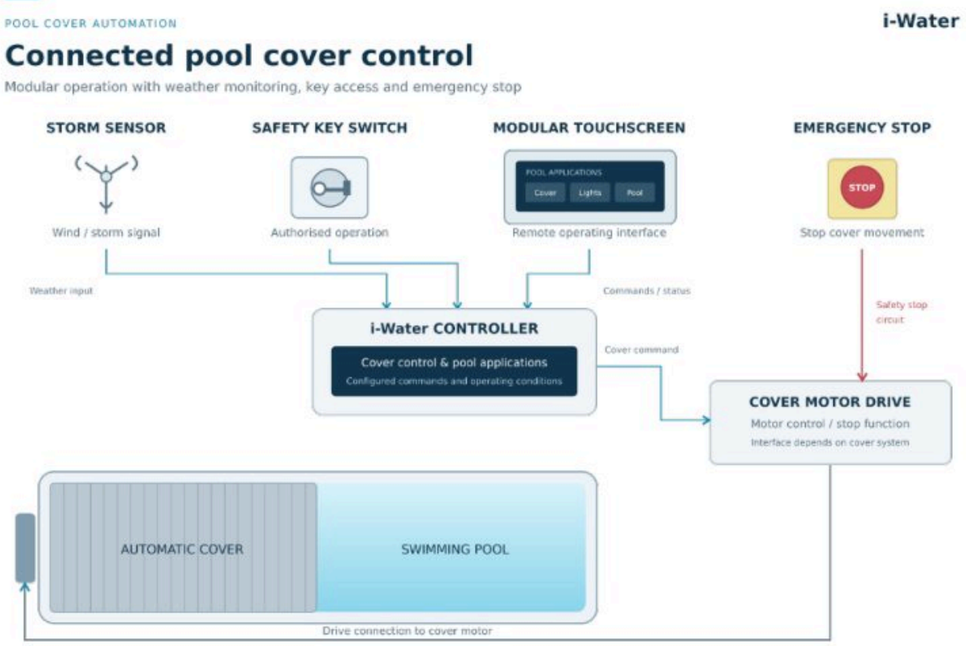

i-Water Touch

Control your pool from a compact touchscreen, neatly integrated inside your pool house or Home.

The screen provides convenient access to connected pool functions, including the automatic pool cover, lighting, fountains and other water features. Through its connection to the i-Water controller, you can operate the applications configured for your installation from one dedicated interface.

Your pool controls, conveniently within reach.



Intelligent Lighting Control

Complete control beyond water treatment.

i-Water Prime can directly manage up to four groups of pool or water-feature lights.

A single group can operate together, while installations with two or more groups can control each group independently. The documented lighting connections support 12 V or 24 V AC / DC power, with individual fuse protection.


This gives users one connected environment for both:

Water Treatment + Pool Experience

Control options

- Integration into the wider i-Water control system
- RGB can be changed pulse control
- DMX control is possible as well
- 1–4 lighting groups
- Independent group control
- 12 V / 24 V supply support
- Individual circuit protection

Water treatment and pool functionality can therefore be managed through one intelligent control architecture.

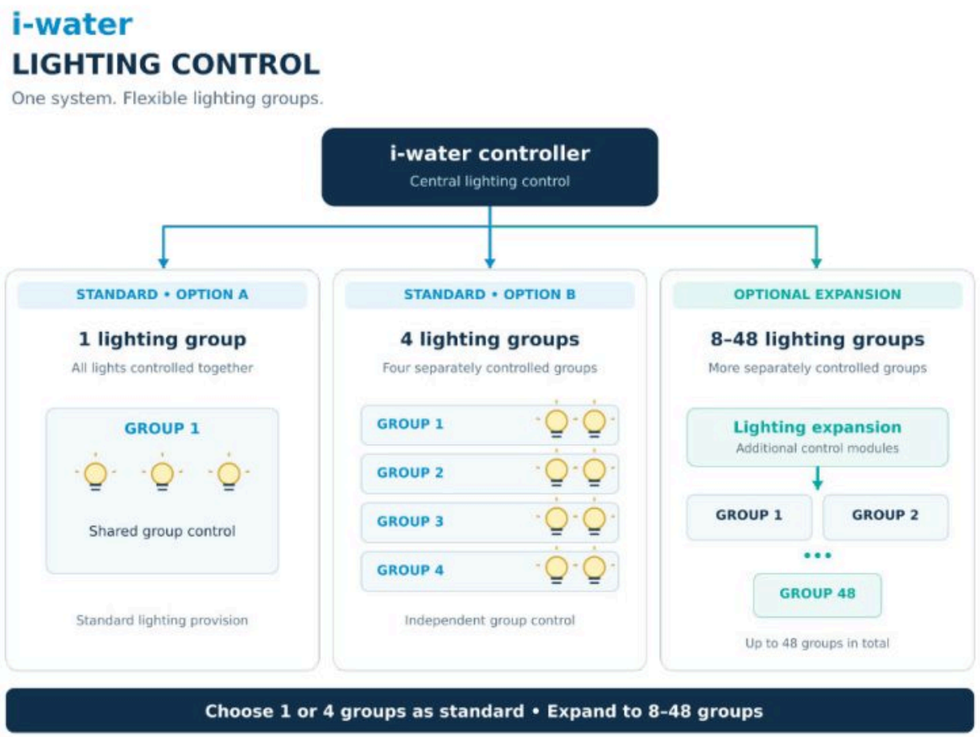

Hydrolysis Control

Advanced oxidation through the water itself

Prime can also form the control layer for a connected hydrolysis treatment cell.

In modern pool-treatment systems, electrochemical hydrolysis uses electrically energised electrodes to generate short-lived oxidising species from water, including reactive oxygen species such as hydroxyl radicals. These highly reactive species can help oxidise microorganisms and organic contaminants close to the treatment cell. Electrochemical advanced-oxidation research confirms that hydroxyl radicals and other reactive species can be generated through electrode-based water-treatment processes. In combination with LOW salt concentration the minimum on Chlorine level can be provided.

Salt-Water Chlorination / Electrolysis Cell

Generate disinfectant directly from salt water

Prime can control a connected electrolysis or salt-chlorination cell as part of the complete treatment system.

Salt-water chlorination works by circulating lightly salted pool water through an electrolytic cell. An electrical current acts on the dissolved chloride ions and generates chlorine, which then forms hypochlorous acid—the active disinfecting form of chlorine in pool water. The CDC describes this as the fundamental operating principle of saline pool chlorination systems.

In combined systems, the two processes can complement one another: rapid electrochemical oxidation plus residual disinfection.



i-Water —Coated Cells for Salt Water Treatment

i-Water cells feature an catalytic coating and are designed for operation at salt concentrations of 1–3 g/L. The coating provides an active surface for the electrochemical reactions used in water treatment. Its composition and quality play an essential role in electrode performance, resistance to degradation and long-term durability.

During operation, an electrical current establishes positive and negative electrode surfaces, enabling the treatment process. When combined with a compatible polarity-reversing controller, the electrodes periodically exchange their positive and negative roles. This helps loosen calcium deposits, keeps the active surfaces cleaner and reduces the need for manual cleaning. The reversal interval should be matched to water hardness and the electrode specification, since unnecessarily frequent reversal can accelerate coating wear.

The electrode plates have a design lifespan of 10,000 operating hours under the specified operating conditions. These hours refer to the time the cell is actively energised. Actual service life depends on operating current, salt concentration, water chemistry, temperature, polarity-reversal settings and cleaning practices.

Maintaining balanced water chemistry and using the correct cell settings helps preserve the catalytic coating and supports reliable performance throughout the cell's service life.

Proposed model	Target pool volume*	Target chlorine production**	Salt concentration	Stated electrode lifespan	Salt required at 2 g/L***
i-Water Cell 40	Up to 40 m³	10 g Cl_2/hour	1–3 g/L	10,000 operating hours	80 kg
i-Water Cell 80	Up to 80 m³	20 g Cl_2/hour	1–3 g/L	10,000 operating hours	160 kg
i-Water Cell 120	Up to 120 m³	30 g Cl_2/hour	1–3 g/L	10,000 operating hours	240 kg
i-Water Cell 200	Up to 200 m³	50 g Cl_2/hour	1–3 g/L	10,000 operating hours	400 kg
i-Water Cell 300	Up to 300 m³	75 g Cl_2/hour	1–3 g/L	10,000 operating hours	600 kg


i-Water Energy Meter — Smart Energy Management

The i-Water energy meter monitors the electricity flowing to and from the grid, identifying when surplus energy from solar panels or wind generation is available.

Using this information, i-Water intelligently manages connected pool equipment to make better use of your own renewable energy. By adapting energy consumption to available surplus power, the system helps reduce grid electricity demand, improve efficiency and lower operating costs—while maintaining the pool's essential functions.

Make the most of your energy. Take control with i-Water.



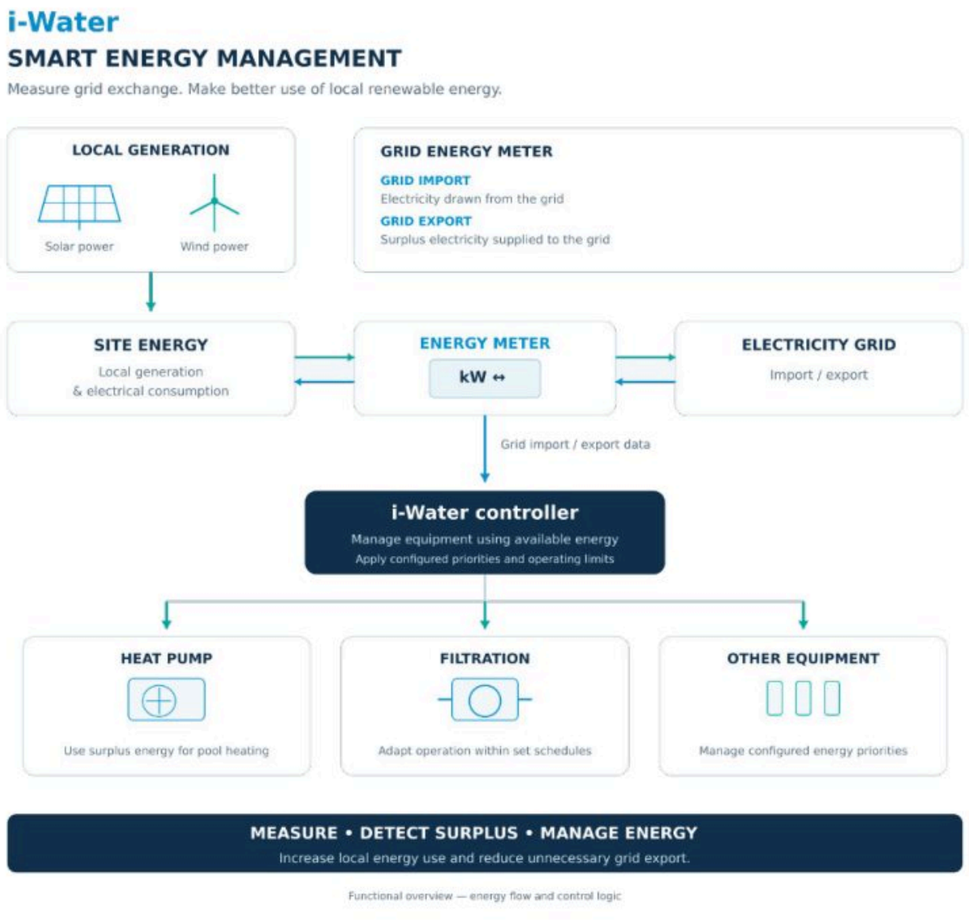

Functional overview — energy flow and control logic

Modular Control Boards


The i-Water One and Prime systems are built around compact, modular circuit boards (add-on modules). Each module adds a dedicated measurement or control function, allowing the system to match the technical requirements of the project at hand.

From pH and free chlorine measurement to variable-speed pump control, stepper motor drivers for dosing pumps, and DMX lighting control, i-Water modules bring a wide range of functions together within one system.

This modular approach makes it easy to combine functions and expand as requirements evolve.


i-pH add-on module

Dedicated to pH and temperature monitoring and control. It supports the pH sensor through either a wired connection or BNC connector, includes a PT1000 temperature-sensor input, and provides suction-lance level monitoring so the system can detect the liquid level in the connected treatment container.

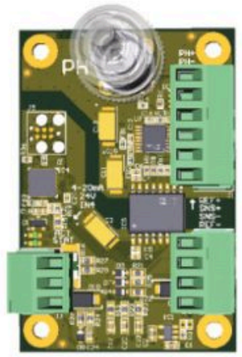


i-pH + Alka+ add-on module

Combines pH and temperature control with Alka+ treatment management. In addition to the pH sensor and PT1000 temperature input, the module supports multiple suction-lance level inputs (L1, L2 and L3 with common GND), allowing the controller to supervise the treatment-liquid containers connected to the system.

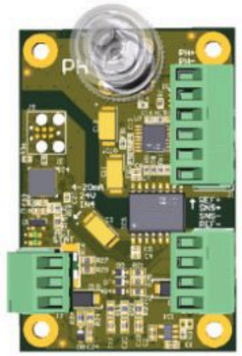

i-pH + FCL add-on module

Measuring Free Chlorine and pH and temperature. It includes the pH connection, PT1000 temperature measurement, dedicated disinfection-sensor input for FCL, and suction-lance level monitoring for the connected chemical containers.

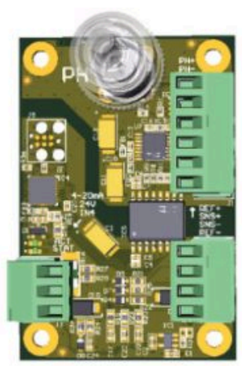


i-pH + Alka+ + FCL add-on module

The most complete configuration of the pH/Disinfection module, combining pH, Alka+, Free Chlorine (FCL) and temperature. It includes the pH connection, PT1000 temperature measurement, dedicated disinfection-sensor input for FCL, and suction-lance level monitoring for the connected chemical containers.




i-ORP add-on module

Dedicated to ORP measurement and temperature monitoring. The ORP sensor can be connected through either a wired connection or BNC connector, while a separate PT1000 temperature-sensor input is provided on the same module.




i-Stepper add-on module

Designed to control the i-Water stepper dosing pumps. The module operates on 24 V power and contains two independent stepper-driver connections — Stepper Driver 1 and Stepper Driver 2 — allowing two dosing pumps to be controlled from one module




i-Speed add-on module

Designed for control of variable-speed filtration and circulation pumps. One module can control two pumps — Speed Pump 1 and Speed Pump 2 — with individual Common, On/Off, Speed 1, Speed 2 and Speed 3 connections for each pump.



i-DMX & Modbus RTU add-on module

This i-Water module enables DMX lighting control and provides a Modbus RTU connection for reading data from your i-Water unit. It combines lighting control with access to system information, supporting integration with external monitoring and automation systems.



Sensors

i-Water pH & Alkalinity Sensor

The i-Water pH, Temperature & Alkalinity Sensor combines three essential water quality parameters in one monitoring solution, helping the i-Water system manage balanced water conditions.

Our Sensor is a unique Patent multi sensing sensor. Alkalinity monitoring provides insight into the water's buffering capacity—its ability to resist changes in pH, and optimise water quality and helps reduce the use of disinfection liquids.

Together, these parameters support informed dosing decisions and more stable water chemistry. Only possible with our patent designed measurement cell.

Key benefits:

- Combined pH, temperature and alkalinity monitoring
- High-quality glass membrane for pH measurement
- Temperature compensation of pH readings
- Insight into the water's buffering capacity
- Supports automatic pH and alkalinity management
- Helps maintain balanced water conditions



i-Water ORP Sensor

Continuous disinfection potential monitoring

The i-Water ORP Sensor measures the water's oxidation-reduction potential, expressed in millivolts (mV). Instead of directly measuring the concentration of one specific chemical, ORP indicates the overall tendency of the water to perform oxidation or reduction reactions. The sensor uses a platinum measuring surface together with a stable reference electrode. Electron activity in the water creates a measurable electrical potential between the two, which is converted into the ORP value.
How it works
A higher ORP generally corresponds to stronger oxidizing conditions, while a falling ORP can indicate reduced oxidation capability. Importantly, ORP is not the same as a direct chlorine concentration measurement; it is an overall electrochemical indicator and is influenced by the complete water chemistry.

Key benefits:

- continuous ORP monitoring
- high qualtity Glass cell
- real-time insight into disinfection condition
- supports automatic sanitizer control
- helps avoid unnecessary over- or under-dosing
- improves water-treatment consistency



i-Water Chlorine Sensor

Continuous free chlorine monitoring

- Measures: Free chlorine from common chlorine treatments and electrolytically generated chlorine.
- Used for: Swimming pools, drinking water and other disinfected water systems, depending on the selected sensor model.
- Benefit: Provides continuous chlorine measurement to support accurate disinfection control and automatic dosing.
- Why it matters: Helps avoid both under-dosing and unnecessary over-dosing of chlorine



i-Water Chlorine Dioxide Sensor

Precise ClO_2 monitoring

- Measures: Chlorine dioxide concentration directly in the water.
- Used for: Fresh water, drinking-water treatment, process water and other chlorine-dioxide disinfection systems.
- Benefit: Provides continuous feedback on the active disinfectant level.
- Why it matters: Helps maintain a consistent chlorine-dioxide treatment level instead of relying only on manual testing.



i-Water Bromine Sensor

Reliable bromine control

- Measures: Free bromine, including hypobromous acid (HOBr) and supported bromine treatment systems.
- Used for: Swimming pools, wellness installations, industrial water, process water and other brominated systems.
- Benefit: Continuously monitors the active bromine level.
- Why it matters: Allows the treatment system to respond when bromine concentration requires adjustment.



i-Water Chlorite Sensor

Monitoring chlorite in water treatment

- Measures: Chlorite concentration in water.
- Used for: Fresh-water installations and treatment processes involving chlorine-dioxide/chlorite chemistry.
- Benefit: Provides dedicated monitoring of chlorite rather than relying on indirect measurements.
- Why it matters: Helps operators keep better control of water-treatment conditions where chlorite must be monitored.



i-Water Ozone Sensor

Dissolved ozone monitoring

- Measures: Dissolved ozone present in the water.
- Used for: Fresh water and, depending on the sensor configuration, tap water, demineralised water, RO water and seawater.
- Benefit: Provides continuous feedback on ozone treatment performance.
- Why it matters: Helps ensure that the required ozone level is being maintained during treatment.



i-Water Hydrogen Peroxide Sensor

H_2O_2 treatment control

- Measures: Hydrogen peroxide concentration.
- Used for: Water-treatment applications using H_2O_2 as part of the treatment or oxidation process.
- Benefit: Continuously monitors peroxide concentration and supports controlled treatment.
- Why it matters: Helps maintain the required H_2O_2 level instead of depending only on periodic manual measurements.
- Available sensor versions include automatic temperature compensation.



i-Water Peracetic Acid Sensor

Continuous PAA Monitoring

- Measures: Peracetic acid concentration.
- Used for: Fresh water and a wide range of professional water-treatment and disinfection applications.
- Benefit: Provides continuous measurement of peracetic-acid treatment.
- Why it matters: Supports precise control of applications where PAA is used as a disinfectant or oxidising agent.



i-Water Conductivity Monitoring

The i-Water conductivity sensor enables monitoring of electrical conductivity. Conductivity reflects the presence of dissolved ions, helping identify changes in water composition. Once configured, i-Water can use the measured conductivity to monitor trends and trigger ale when predefined limits are exceeded.

Key features:

- Continuous conductivity monitoring
- Measuring range: 0.04–1000 and 100 - 15.000 µS/c
- G½ threaded process connection
- Supports trend monitoring and configured alerts



i-Water Turbidity Sensor — Water Clarity Monitoring

The i-Water turbidity sensor continuously monitors water cloudiness by measuring how suspended particles scatte light (indicator of increased particle levels or a need to investigate filtration performance). Turbidity monitoring complements other water-quality measurements, provi additional insight.

Key benefits.

- Continuous monitoring of water cloudiness
- Early detection of changes in water clarity
- Supports filtration monitoring and configured alerts




i-Water Measurement cell

i-Water measurement cell — Developed In-House, Designed for Our Sensors

The i-Water Measurement cell is a custom- in-house designed measurement cell for all our i-Water sensors. Its dedicated design brings the sensors together in one compact assembly, allowing the treated water to flow past them for continuous water quality monitoring.

Type	Measurement	Standard Alka functions
iW-MC-01	pH / Temp / Alka +	• Alka Measurement cell
iW-MC-02	pH / Temp / Alka + / ORP	• Alka Measurement pumps
iW-MC-03	pH / Temp / Alka + / FCL	• Alka Measurement valves
iW-MC-04	pH / Temp / Alka + / FCL / ORP	**Standard Measurement functions**
iW-MC-05	pH / Temp / ORP	• Flow switch
iW-MC-06	pH / Temp / FCL	• Flow Valve
iW-MC-07	pH / Temp / FCL / ORP	• Micro filter

Extra available Options		
iW-MC-01	Flow rate sensor	add a mini Flow rate meter to the measurement cell to ensure the flow is calibrated and controlled.
iW-MC-02	Liquid injection points	Add disinfection point directly into the measurement cell so you don't have to add separate injection points
iW-MC-03	Flow mini circulation pump	Ensure the flow is correct and distress flow from the circulation pump

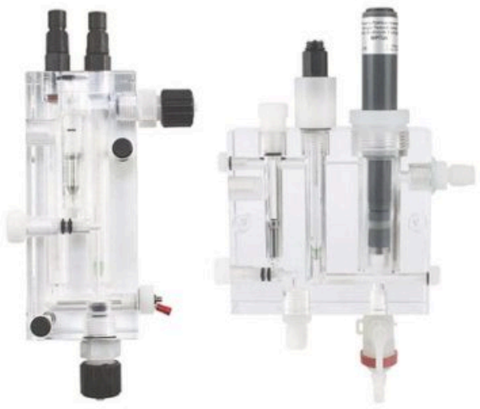

Pressure Sensor — Filter / tubing

For intelligent filter monitoring.




A pressure sensor allows the control system to continuously monitor the operating pressure of the filtration circuit. As dirt accumulates inside a filter, the restriction to water flow increases and this change can be detected through pressure measurement.

For true filter-condition monitoring, pressure can be measured before and after the filter or on top of the filter

Filter Inlet Pressure → Filter → Filter Outlet Pressure

The difference between these two readings is known as differential pressure. As the filter becomes more blocked, this differential pressure increases, providing a clear indication that the filter may require cleaning or backwashing.

Combined with our i-Water intelligence we are able to manage backwash automatically accordingly pressure

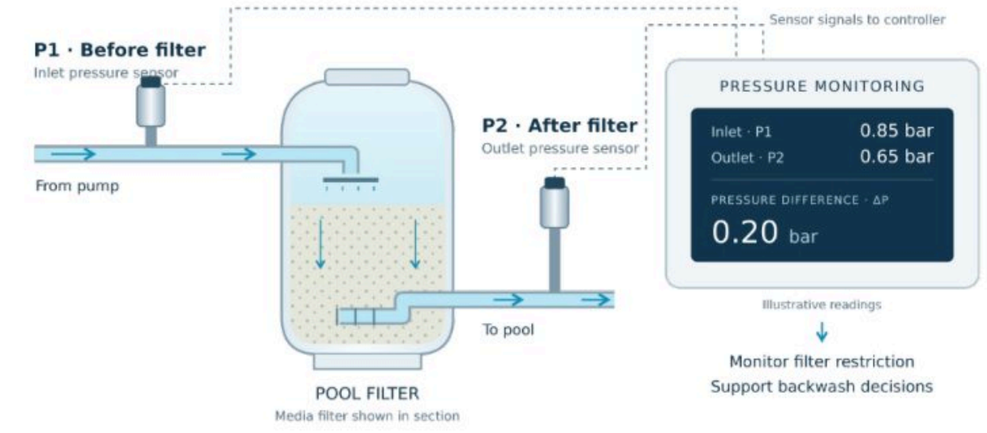

Level Sensors

i-Water automatic water level control

i-Water offers automatic water level controllers for swimming pools, skimmers and buffer tanks. With three sensing technologies, our range supports both simple level detection and continuous water level measurement.

- Float Switch Level Control
- Electrode Level Control
- Hydrostatic Level Control

Combined Pool and Buffer Tank Management

The skimmer electrode block and the separate buffer-tank electrodes can be combined within one i-Water system. Each maintains its own level measurement, allowing the swimming pool and buffer tank to be monitored and managed simultaneously through coordinated control logic. Through the waterflows our i-Water controller can manage the flows of water from and to the Buffertank. Therefore has to be automatic valves built into the system.

Float Switch


Installed in a skimmer or water tank, the float switch detects the water level and provides a signal when the water reaches or drops below a defined level. It can be used for level control, automatic filling and low-water protection.



AUTOMATIC LEVEL CONTROL / FLOAT SWITCH

Float switch level control

i-Water offers three sensing technologies for automatic water-level control in pools, skimmers and buffer tanks.

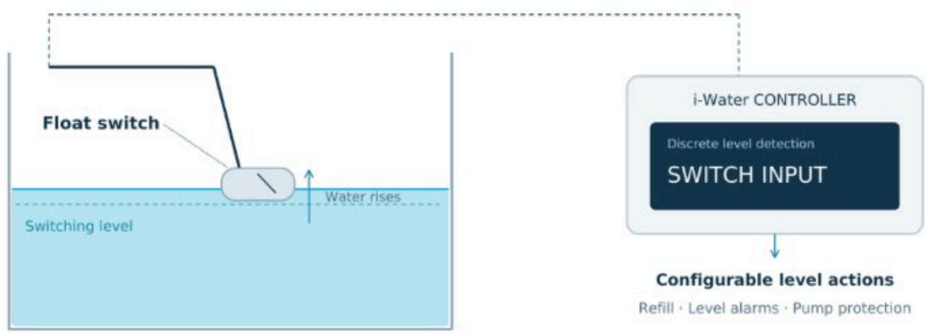

Electrode Sensor

Our second range uses Titanium electrode sensors, available with 1 or 4 sensing zones plus a common reference electrode (GND). Water contact between a sensing electrode and the reference electrode allows the controller to detect the corresponding level.

For skimmer installations, the electrodes are integrated into a compact block. For buffer tanks, separate electrodes allow the sensing points to be positioned at the required heights. This provides flexibility for refilling, level alarms and pump protection, according to the selected configuration.

Tank electrode




Skimmer electrode



One system. Pool and tank control.

Combine skimmer level detection with buffer-tank monitoring to manage both water levels simultaneously through i-Water.

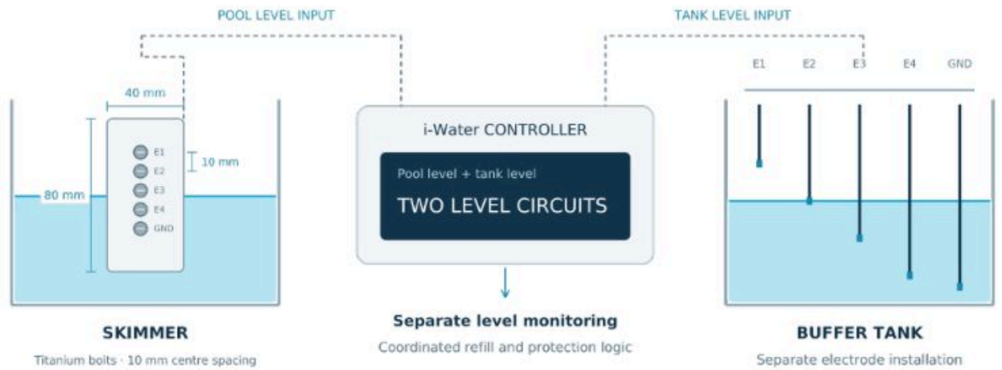

Manage the pool and its buffer tank together.

The skimmer and buffer tank remain separate measurement circuits. i-Water combines their signals in the configured control logic, allowing each water level to be monitored and managed within one system.

Hydrostatic Pressure Sensor — Tank

For continuous water-level measurement.

submersible hydrostatic pressure sensor. The visible PS3 marking corresponds with ifm's PS3 family of submersible pressure/level transmitters.

Instead of using a mechanical float, the sensor is lowered into the and measures the pressure generated by the water above it.



The principle is simple:

More water above the sensor → Higher pressure
Less water above the sensor → Lower pressure

Because the density of the liquid is known, the measured pressure be converted into the height of the water column, giving continuo level information rather than only a simple "full/empty" signal. Hydrostatic level measurement is based on the relationship betwe liquid density, gravity and liquid height.


ifm specifically describes its PS hydrostatic sensors as being dropped directly into the tank, using a two-wire transmitter and an internally vented cable for atmospheric-pressure compensation.

Simple explanation:
Measures water pressure at the bottom of the tank → Converts pressure into water depth → Provides continuous tank-level monitoring.

WATER LEVEL MONITORING

Hydrostatic pressure sensing

Continuous level measurement for pool balance tanks

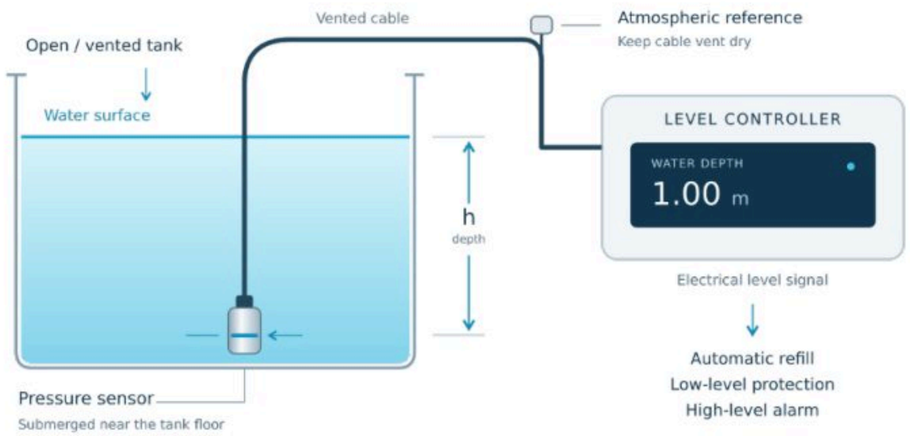

Higher water level. Higher pressure.

The sensor measures the weight of the water column above its diaphragm.
The controller converts this pressure into a continuous water-level reading.

1 m water ≈ 98.1 mbar

Depth measured above the sensor diaphragm
Schematic illustration · Not to scale

Flow and Flow Rate Monitoring

i-Water offers solutions for both flow detection and flow rate measurement, helping monitor water circulation throughout the installation.

Flow Switch

Installed in the pipework, typically after the circulation pump, the flow switch confirms whether water is flowing through the system. It provides a simple flow / no-flow signal that can be used for monitoring and equipment protection, and enable the dosing of chemicals or processes.



i-Water Measurement Cell Flow Switch

The i-Water measurement cell features an integrated flow switch. Sufficient water flow lifts the cylinder to the activation position, sending a flow confirmation signal to the i-Water controller.

When flow stops or becomes insufficient, the cylinder drops and the signal is deactivated, allowing measurement and dosing functions to respond according to the configured settings.




FLOW CONFIRMATION

i-Water

Measurement cell flow switch

Water flow lifts a pointed metal cylinder to the switch activation position

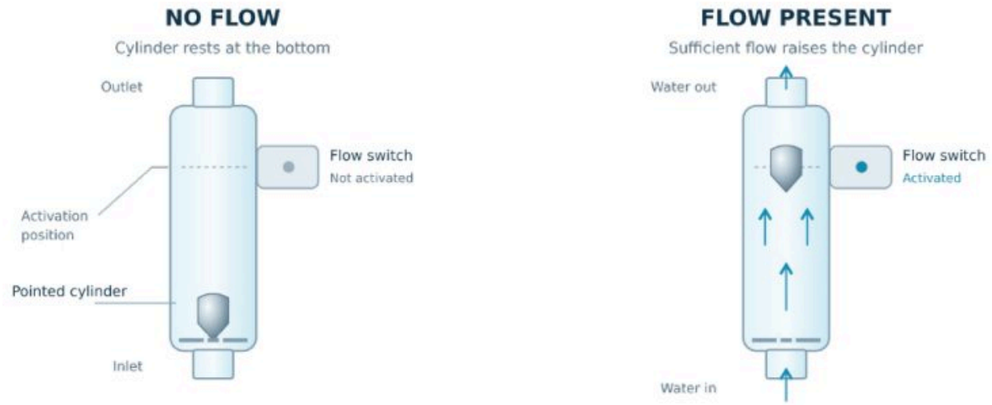

No flow confirmation signal

Flow confirmation to i-Water

A simple indication that water is circulating through the cell.

When flow stops or becomes insufficient, the cylinder drops and flow confirmation is lost.
The controller uses this signal in the configured measurement and dosing logic.

i-Water Flow Rate Sensor

Real-Time flow monitoring for smarter filtration

The i-Water flow rate sensor is installed directly in the water pipe to continuously measure the speed and flow of water through the system.

Inside the sensor is a small paddlewheel rotor. As water passes through the pipe, the rotor turns; the transmitter converts this movement into a measurable flow signal. The device is designed for solid-free liquids, making it suitable for connection to control and monitoring systems.

When the circulation pump is operating under the same conditions:

- Normal / High Flow → filter is allowing water to pass efficiently
- Reduced Flow → resistance through the filtration system is increasing
- Low Flow → can indicate that the filter is becoming dirty and that backwashing may be required
- Protection for chemical dosing under ... % of flow. (public pools)



Key Benefits

- Continuous flow-rate monitoring
- Helps identify reduced filtration performance
- Can support smarter backwash decisions
- Provides early indication of restricted water flow
- Suitable for different pipe sizes
- Easy integration into automated water-treatment system.
- Available as part of the i-Water product range

Technical Highlights

- Pipe sizes: DN15 to DN600
- Flow range: 0.15 to 8 m/s
- Protection: IP5

The i-Water Flow Rate Measurement Sensor
i-Water provides the option to install a flowrate sensor on the measurmement cell to ensure the values are taking place under a optimized flow volume, besides this our mini flow rate sensor gives a second option to be used as a flow sensor.



i-Water Temperature Sensor

Extend your i-water system with an additional temperature sensor to control heating or cooling in extra zone(s), or to measure ambient air temperature.

The i-water Core supports up to three additional temperature zones, each with its own configured actions. These can include heating, cooling and frost protection, allowing the system to respond to the temperature measured in each zone.

Flexible temperature monitoring and control, managed centrally through i-water.



i-Water Pool Grounding & Bonding Kit

The i-water grounding probe provides an electrical connection between the pool water and the installation's equipotential bonding system. When correctly installed, it helps reduce unwanted voltage differences between the water and connected conductive components, contributing to electrical safety around the pool.

This is particularly relevant for installations equipped with electrolysis or hydrolysis systems, jetstreams, circulation pumps, heaters and underwater lighting, where electrical equipment operates in or near the water. Proper bonding helps limit touch voltages between accessible metal parts and the pool water.

The stainless-steel probe features a standard 1/2" threaded connection and a 10 mm² yellow-green bonding conductor, secured to the probe with a crimped cable lug.

The kit forms part of the pool's electrical protection system. It must be connected to the appropriate bonding network and complements the required earthing and residual-current protection; it does not replace them.



i-Water Mini Flow Pump

The i-Water Mini Flow Pump provides a steady flow of sample water through the measurement cell, helping maintain consistent conditions around the sensors for stable, reliable readings.

Designed to circulate water through the measurement circuit without increasing pressure in the main pipework or placing additional strain on the existing hydraulic system, it supports consistent sampling and accurate measurement and dosing control.

Its compact design makes it easy to integrate into



i-Water Water Consumption Monitoring

The i-Water water meter measures the volume of water added to your pool, pond or water project during refilling. It gives you a clear overview of total consumption from the start, as well as water usage over selected periods.

By tracking refill volumes over time, you can identify changes in demand and assess consumption alongside ambient temperature and operating conditions. This helps you understand how much water your project uses and manage replenishment more efficiently, and you are able to detect leackages.

Measure precisely. Know exactly how much water you add.



i-Water Leak Detection Sensor

The i-Water Leak Detection Sensor detects water on the floor of a technical room, providing an early warning of a possible leak.

When connected to a configured i-Water system, the sensor can trigger an alert to notify the owner that water has been detected. This enables a prompt response to investigate the cause and help limit water damage.

Its compact design allows installation near pumps, filters, pipework and other equipment where leaks may occur.

Key benefits:

- Early detection of water leaks
- Owner notification through the i-Water system
- Compact design for technical rooms
- Helps reduce the risk of unnoticed water damage



Suction Lance

Installed directly inside a chemical jerry can, the suction lance draws treatment liquid from the container and supplies it to the dosing pump. The version on the linked product page also incorporates level monitoring so the pump can stop when the container is empty.



Wind sensor

Installed directly inside a chemical jerry can, the suction lance draws treatment liquid from the container and supplies it to the dosing pump. The version on the linked product page also incorporates level monitoring so the pump can stop when the container is empty.



Dosing Pumps

Precision Dosing. Controlled by i-Water.

The i-Water dosing pumps are designed to deliver accurate and consistent chemical dosing as part of the complete i-Water treatment system. They use stepper-motor technology, selected for precise control, long service life and easy maintenance.

The pumps can be supplied integrated into an i-Water control panel or as standalone units, making them suitable for both new installations and existing plant rooms.

Benefits


- Precise Stepper-Motor Control: Controlled motor movement enables accurate and repeatable liquid dosing. All systems are standard provided with these pumps.
- 6,000-Hour Motor Life: Both documented pump models are specified with a 6,000-hour motor lifetime.
- Integrated or Standalone: Use the pumps inside an i-Water control panel or separately in the plant room.
- Easy Maintenance: The pump has been developed around long service life and simplified maintenance.
- Designed for the i-Water Ecosystem: The dosing technology integrates directly with i-Water sensing and control equipment.
- Two Capacity Options: Choose precision lower-volume dosing or higher-volume delivery according to the treatment requirement.

How It Works

1. Controller calculates the treatment requirement : The i-Water system determines when and how much treatment is required.
2. Pulse-controlled dosing : The controller sends controlled pulses to the pump's stepper-motor driver.
3. Precise chemical delivery : Because the pump movement is linked to the pulse frequency, the system can calculate the quantity of liquid being delivered.
4. Continuous system control : The dosing pump works together with the i-Water sensors and controller as part of the automated treatment process.

Dosing pump model A



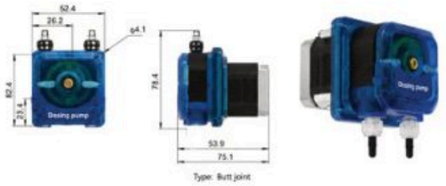

Items		Technical parameter
Basic Parameters	Motor type	Stepper motor
	Flow range	65 ml/min
	Power	20 W
	Control method	i-Water Stepper driver
	Weight	+/- 365 g
	Rated Voltage	24V
	Motor life	6000 h
Pump tech details	Inner diamter	2.4 mm
	Outer diameter	5.6 mm
	Rotating speed	300 rpm
	Reference noice value	Under the ambient noise of 35 dB, at the measured distance of 50 cm is less than 60 dB

Dosing pump model B






Items		Technical parameter
Basic Parameters	Motor type	Stepper motor
	Flow range	3200 ml/min
	Power	40 W
	Control method	i-Water Stepper driver
	Weight	+/- 890 g
	Rated Voltage	24V
	Motor life	6000 h
Pump tech details	Inner diamter	9.6 mm
	Outer diameter	14.6 mm
	Rotating speed	300 rpm
	Reference noice value	Under the ambient noise of 35 dB, at the measured distance of 50 cm is less than 68 dB

i-Water Online

i-Water Online

Welcome to i-Water Online, a connected ecosystem that brings your water installations together in one online platform. Whether you manage one pool or multiple projects across different locations, i-Water Online grows with your needs.

- Connect, monitor, control and adjust your systems from anywhere. From a private swimming pool to a hotel, wellness centre, pond or lagoon, i-Water gives you a clear overview and control over every stage of water management.
- Organised by location, project, unit and water project, i-Water Online keeps even complex installations easy to manage. Monitor water quality, adjust settings and coordinate sensing, dosing, filtration and temperature control—all within one connected environment.
- Depending on the connected control device, end users (pool owner) and maintenance companies have ample options to monitor and adjust water values.

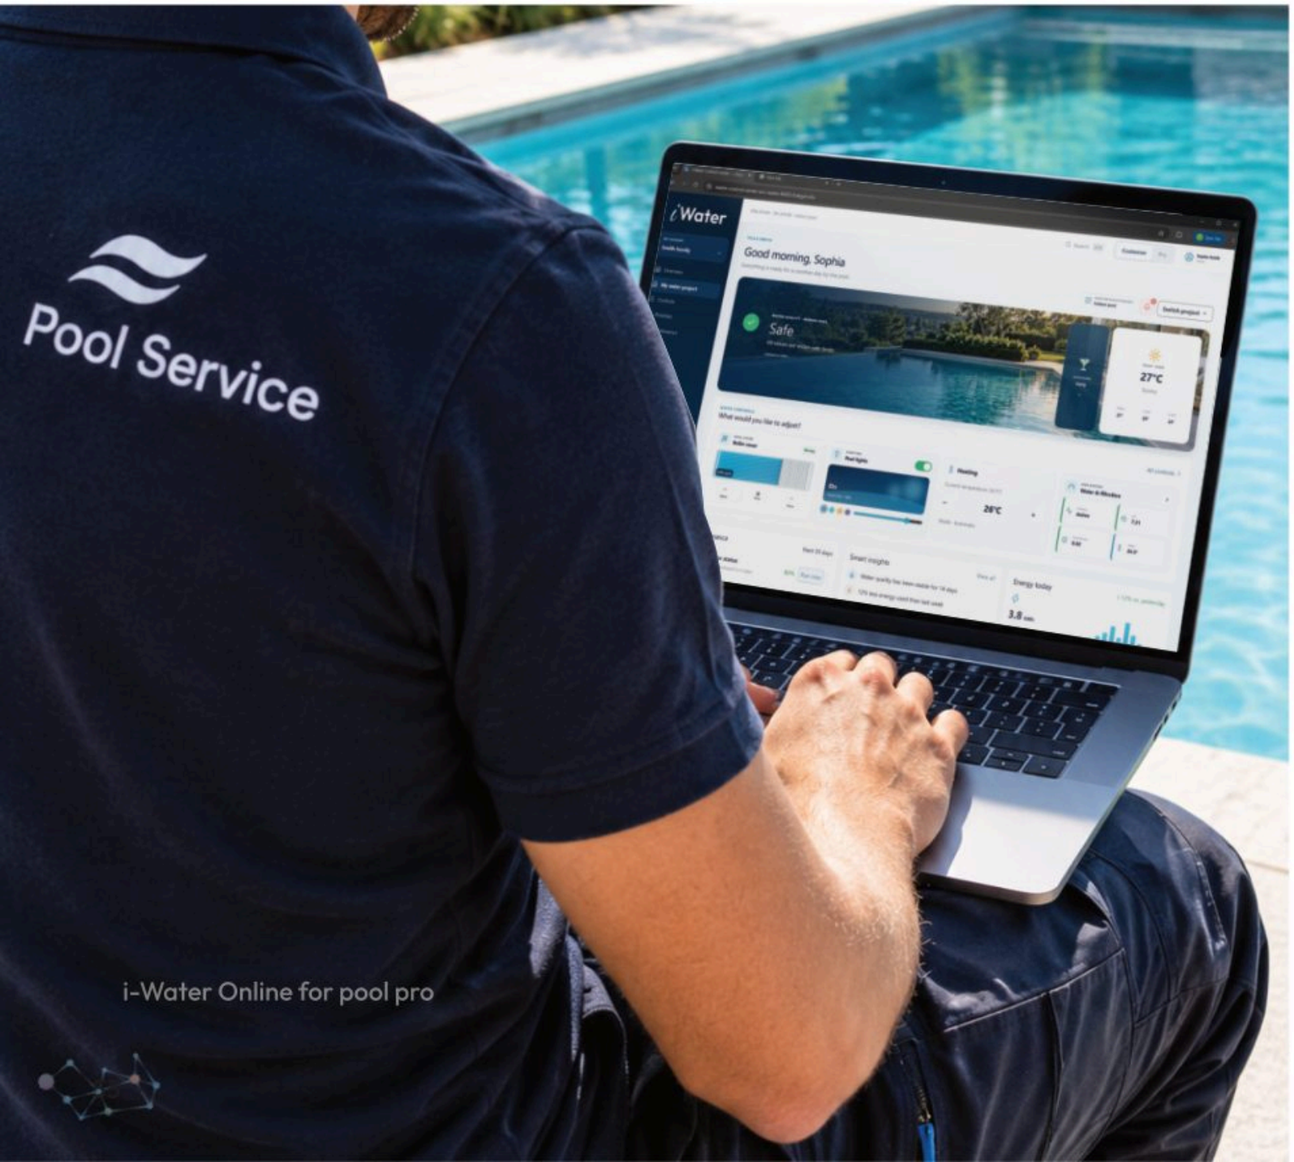


i-Water Online for pool pro

How it works for the pool pro :

- **Manage multiple locations from one platform**
  Monitor different properties, facilities or customer sites without switching between separate systems.
- **Keep every project organized**
  Each location can contain several projects, making large portfolios easier to structure and manage.
- **Control multiple water installations**
  Pools, wellness pools, ponds, lagoons and other water projects can all be connected within the same i-Water environment.
- **One project, multiple units**
  Use multiple i-Water measuring and control units within the same project when the installation requires more sensing, dosing or control capacity.
- **One controller can manage multiple independent systems**
  For example, a swimming pool and wellness pool can each have their own sensors, filtration and dosing while being supervised through the same central i-Water controller.
- **See exactly where attention is needed**
  Move from the complete portfolio down to a specific location → project → unit → water system to quickly identify where a warning, malfunction or maintenance requirement is coming from.
- **Monitor every system individually**
  View measurements, equipment status, treatment activity and performance for each connected water installation.
- **Reduce unnecessary site visits**
  Engineers and service teams can first assess the condition of a project remotely before deciding whether physical intervention is required.
- **Simplify maintenance planning**
  Instead of maintaining installations separately, teams can see which projects require attention and prioritize work more efficiently.
- **Better control for installers and project managers**
  One system provides an overview of multiple customers and installations while still allowing detailed access to each individual project.
- **Scales with the customer**
  Start with one installation and expand to additional pools, projects or locations without losing the central overview.

The i-Water App

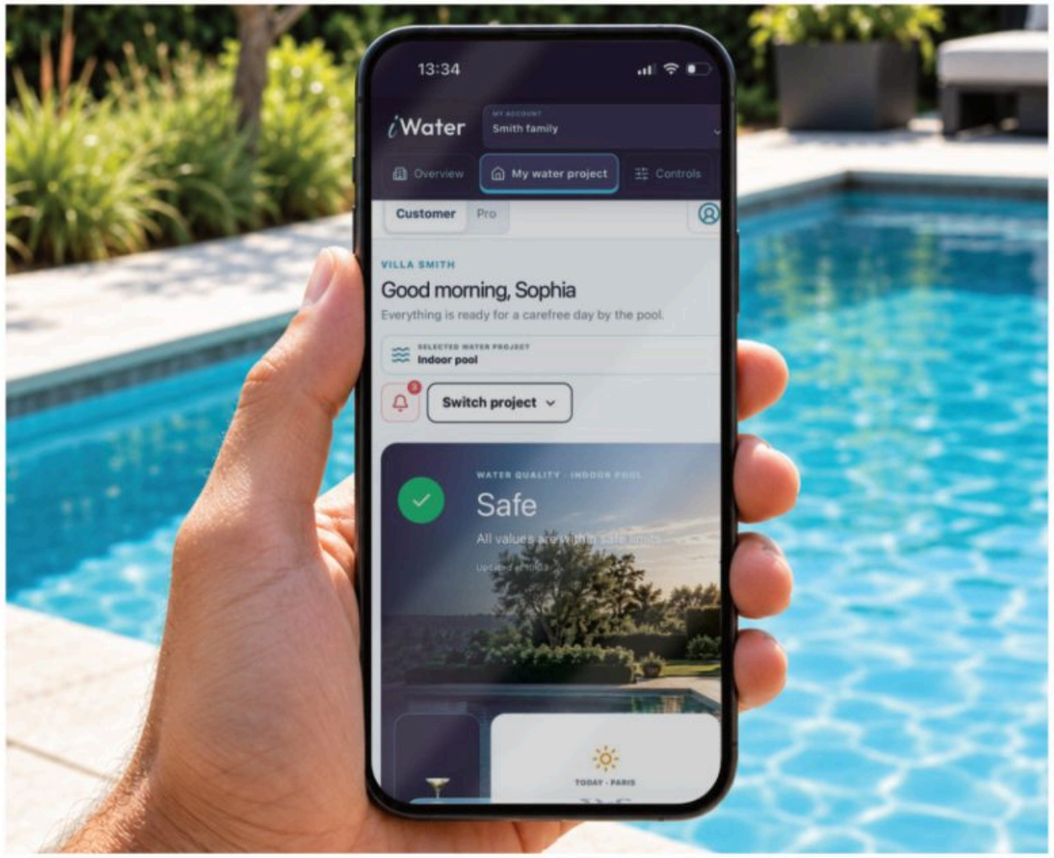

Your complete water system. Connected anywhere.

i-Water Online brings monitoring, control and system management into one connected platform. From water quality and equipment status to maintenance, covers and lighting, users can see what is happening and take action remotely.

Monitor in real time

- See the current condition of your pool, pond or water-treatment project wherever you are.
- Live water-quality readings
- Equipment and system status
- Treatment and dosing information
- Water level, temperature, flow and other connected parameters

Your complete water system
Connected anywhere

Monitor, control and manage your pool, pond or water-treatment installation. Anytime, anywhere. I-Water online connects water quality. equipment, maintenance and pool functions in one intuitive platform for pool professionals and pool owners.

Real-time monitoring

Track water quality, temperature, flow, water levels, dosing and equipment status remotely.

One clear overview

Manage multiple installations, adjust settings and treatment parameters, and monitor results from one platform.

Smarter maintenance

Identify abnormal performance, anticipate maintenance needs and reduce unnecessary site visits.

Instant alerts

Receive notifications about equipment faults, water-quality issues, flow or pressure problems, treatment alarms and pool leaks.

Flexible system control

Configure sensors, dosing, treatment and accessories. Operate connected pool covers and control pool or water-feature lighting.

Easy product ordering

Order treatment liquids, consumables and other i-Water products directly through the platform.

Filters

Reliable Filtration. Built for Every Water System.

Reliable Filtration. Built for Every Water System.

i-Water filters use a solid polypropylene filter vessel, designed for strength and resistance in demanding pool and water-treatment environments. Polypropylene filter tanks are widely used because they are corrosion-resistant, chemically resistant and suitable for fresh, salt and treated water applications.

i-Water offers solid polypropylene filtration systems designed for durable, corrosion-resistant water treatment.

The same robust filter construction can be supplied with either sand or glass filtration media, depending on the requirements of the project.

- Sand Media — a proven and economical solution for reliable everyday filtration, capturing suspended particles as water passes through the filter bed.
- Glass Media — an alternative filtration media designed for efficient particle capture, improved water clarity and effective backwashing.



Our filter range is being developed so each type of water project can be served with our product range. Each filter features a polypropylene (PP) body and a transparent PMMA lid, providing visibility into the vessel and access for inspection and maintenance.

ISA Model Volume range — compact Filtration
The FA-based range offers a compact vessel with a shallower filter bed, making it a practical choice for installations where space and overall filter height are key considerations.

HFS Volume range — increased media Volume
The HFS-based range provides a taller vessel with additional space for filter media. Its deeper bed offers a longer filtration path while retaining a compact footprint.

Benefits

Solid polypropylene construction

Resistant to corrosion and common pool-treatment environments

Suitable for pools, wellness installations and other water projects

Available with sand or glass media

Easy cleaning through backwashing

Semi- and High bed filter

Polypropylene Filters — Semi-High Bed and True High Bed Filtration

Our polypropylene filter range offers three filterbed heights: 800, 1000, and 1200 mm. Each model features a PP body and a transparent PMMA lid and is available with either standard water backwashing or air-assisted backwashing.

800 mm — Semi-High Bed: Compact and Practical

The 800 mm version offers the lowest overall installation height and smallest media requirement in the range. It combines a substantial filterbed depth with a compact design, making it a practical choice for technical rooms with limited vertical space.

1000 mm — Semi-High Bed: Additional Filtration Depth

The 1000 mm version provides a longer filtration path and 25% more nominal filterbed volume than the 800 mm version at the same internal diameter. It offers a balance between media depth, installation height and media quantity.

1200 mm — True High Bed: Greater Media Capacity

The 1200 mm version provides 50% more nominal filterbed volume than the 800 mm version at the same internal diameter. Its deeper bed creates additional space for particle retention within a correctly designed filter.

A suitable choice for installations where increased filtration depth is a priority.
Larger bed depth increases media volume and filtration-path length. It does not automatically increase the permitted flow rate, which depends on filter diameter, media selection and filtration velocity. A High Bed Filter, also known in the industry as a deep-bed filter, uses a significantly deeper layer of filtration media than a conventional pool filter. Instead of collecting contamination mainly near the upper surface, the deeper media bed allows particles to be captured through a greater depth of the filter, increasing filtration capacity and improving water clarity. Commercial deep-bed filters commonly use media depths around 0.8–1.2 m, depending on the design.




Air-assisted backwashing

A more effective way to clean the filter media

Traditional filters normally rely primarily on reverse water flow to clean the media. With air-assisted cleaning, compressed air is introduced from underneath the filtration bed, creating strong agitation between the media particles.

Why add air?

- More aggressive cleaning of the filter media
- Helps release contamination trapped deeper inside the bed
- Reduces reliance on water alone for media agitation
- Saves water
- Can improve backwash efficiency
- Can help reduce the amount of water required for cleaning, depending on system design
- Helps maintain filtration performance over time

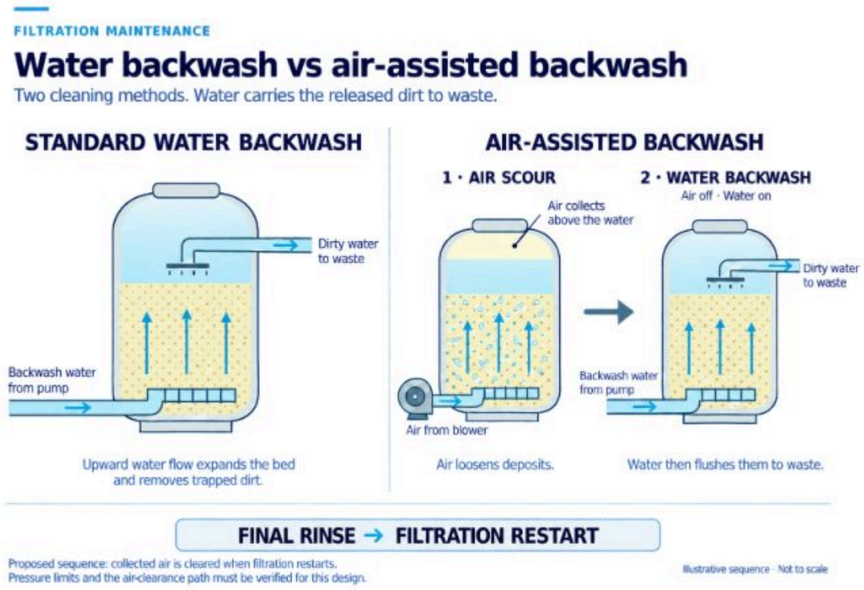



Our selected compressor is quiet, with a oil-free operation and compact design make it a practical addition to a pool's technical room. The oil-free pump requires no lubricating oil, simplifying routine maintenance.

Equipped with a 0.6 HP (0.45 kW) motor, a 6-litre air tank and a maximum pressure of 8 bar, the compressor provides a free air delivery of 48 l/min. It is intended for intermittent operation, with suitability depending on the pressure and airflow requirements of the backwash system.

ISA Model

800 mm Filter Bed

ISA Model Volume Range — Compact Filtration
The FA-based range offers a compact vessel with a shallower filter bed, making it a practical choice for installations where space and overall filter height are key considerations.

Type	Diameter	Totale hoogte	Filter m²	Filterbed volume[1]
ISA-1	520	800	2"	0,20 m²
ISA-2	640	830	2"	0,30 m²
ISA-3	720	930	2"	0,40 m²
ISA-4	840	950	2"	0,52 m²
ISA-5	960	1040[3]	2"	0,70 m²
ISA-6	1160	1150	2"	1.01 m²

Type	Zand media	Glas media	Pomp debiet[2]	Zwembad volume / 4 H
ISA-1	70–90 L	105 kg	6 m³/h	24 m³
ISA-2	105–135 L	168 kg	9 m³/h	36 m³
ISA-3	140–180 L	252 kg	12 m³/h	48 m³
ISA-4	182–234 L	336 kg	15,6 m³/h	62,4 m³
ISA-5	245–315 L	504 kg	21 m³/h	84 m³
ISA-6	354-455	735 kg	30 m³/h	120 m³

HFS Volume range

1000 mm Filter Bed

Type	Binnendiameter (mm)	Totale hoogte[1] (mm)	In/uit	Filteroppervlak (m²)	Filterbedvolume (L)
HFS-1000-1	1000	1950	DN80	0,785	790
HFS -1000-1.2	1200	2050	DN100	1,131	1130
HFS-1000-1.3	1300	2100	DN100	1,327	1330
HFS-1000-1.4	1400	2200	DN100	1,539	1540
HFS-1000-1.6	1600	2300	DN125	2,011	2010
HFS-1000-1.8	1800	2350	DN125	2,545	2540
HFS-1000-2.	2000	2450	DN150	3,142	3140
HFS-1000-2.2	2200	2550	DN200	3,801	3800
HFS-1000-2.4	2400	2550	DN200	4,524	4520
HFS-1000-2.5	2500	2650	DN200	4,909	4910
HFS-1000-2.8	2800	2850	DN250	6,158	6160
HFS-1000-3	3000	2850	DN250	7,069	7070

Type	Zand ≈[2] (kg)	AFM-glas ≈[2] (kg)	Pompdebiet[3] (m³/h)	Zwembadvolume[3] (m³)
HFS-1000-1	1100	900	23,6	94
HFS -1000-1.2	1650	1400	33,9	136
HFS-1000-1.3	1900	1600	39,8	159
HFS-1000-1.4	2300	1900	46,2	185
HFS-1000-1.6	2900	2400	60,3	241
HFS-1000-1.8	3800	3150	76,3	305
HFS-1000-2.	4550	3850	94,2	377
HFS-1000-2.2	5450	4600	114,0	456
HFS-1000-2.4	6500	5450	135,7	543
HFS-1000-2.5	7100	5950	147,3	589
HFS-1000-2.8	8650	7200	184,7	739
HFS-1000-3	9850	8250	212,1	848

HFS Volume range

1200 mm Filter Bed

Type	Binnendiameter (mm)	Totale hoogte[1] (mm)	In/uit	Filteroppervlak (m²)	Filterbedvolume (L)
HFS-1000-1	1000	1950	DN80	0,785	790
HFS -1000-1.2	1200	2050	DN100	1,131	1130
HFS-1000-1.3	1300	2100	DN100	1,327	1330
HFS-1000-1.4	1400	2200	DN100	1,539	1540
HFS-1000-1.6	1600	2300	DN125	2,011	2010
HFS-1000-1.8	1800	2350	DN125	2,545	2540
HFS-1000-2.	2000	2450	DN150	3,142	3140
HFS-1000-2.2	2200	2550	DN200	3,801	3800
HFS-1000-2.4	2400	2550	DN200	4,524	4520
HFS-1000-2.5	2500	2650	DN200	4,909	4910
HFS-1000-2.8	2800	2850	DN250	6,158	6160
HFS-1000-3	3000	2850	DN250	7,069	7070

Type	Zand ≈[2] (kg)	AFM-glas ≈[2] (kg)	Pompdebiet[3] (m³/h)	Zwembadvolume[3] (m³)
HFS-1000-1	1100	900	23,6	94
HFS -1000-1.2	1650	1400	33,9	136
HFS-1000-1.3	1900	1600	39,8	159
HFS-1000-1.4	2300	1900	46,2	185
HFS-1000-1.6	2900	2400	60,3	241
HFS-1000-1.8	3800	3150	76,3	305
HFS-1000-2.	4550	3850	94,2	377
HFS-1000-2.2	5450	4600	114,0	456
HFS-1000-2.4	6500	5450	135,7	543
HFS-1000-2.5	7100	5950	147,3	589
HFS-1000-2.8	8650	7200	184,7	739
HFS-1000-3	9850	8250	212,1	848

Advanced glass filter media

i-Water × Nature Works

High-performance filtration. Lower water use. Built for long-term efficiency.

i-Water is partnering with the manufacturer Nature Works to offer advanced glass filtration media for swimming pools, commercial facilities and specialized water-treatment applications.



Nature Works Glass Filter Media

Maximum Filtration Performance

Nature Works is a premium white/pure glass filter media made from controlled virgin glass, designed to replace conventional silica sand in standard filtration systems. It combines carefully calibrated grains with Anti-Compaction Technology® to maintain open water channels through the filter bed and provide stable filtration with low pressure loss.

Why Nature Works?

- 99.64% filtration performance — tested by IFTS laboratories.
- NSF/ANSI/CAN 50 & 61 certified — including applications requiring drinking-water treatment standards.
- Anti-Compaction Technology® — helps keep the filter bed open and reduces clogging.
- Reduced pressure loss — allowing the circulation pump to operate more efficiently.
- Fewer backwashes — Nature Works reports up to 60% water savings in pool applications through reduced backwashing requirements.
- Single-layer installation — no multiple grain layers are required under standard installation conditions.
- Around 20% less media by weight compared with the quantity of silica sand specified for the filter.
- Reusable & recyclable filtration media.
- Smooth, micro-ground grains for safer handling.

NW40 Glass Filter Media

Controlled Recycled Glass. High-Calibrated Filtration.

NW40 is Nature Works' green glass filter media manufactured from recycled glass of controlled origin. Its High Calibration Technology provides high particle-retention capacity while helping maintain open microchannels and low-pressure loss through the filter bed.

Before use, the recycled glass undergoes a dual disinfection process using ozone and UV radiation, providing a clean and highly controlled filtration media.

Why NW40?

- NSF/ANSI/CAN 50 certified
- Controlled-source recycled green glass
- Dual Ozone + UV disinfection process
- High Calibration Technology
- High solids and particle-retention capacity
- Filtration down to 1 µm, according to Nature Works' technical specifications.
- Low pressure loss for more efficient circulation
- Reduced backwashing requirements, helping save water and energy
- Single-layer filtration
- Requires approximately 20% less media by weight than silica sand



i-Water Floc Mixer (WMF)

i-Water floc mixer – integrated mixing and i-Floc injection

The i-WMF mixer features a polypropylene (PP) mixing insert housed inside a transparent tube, allowing visual inspection of the mixer and the water passing through it.

Our in house designed shaped fins redirect the flowing water to distribute the injected i-Floc throughout the water stream before filtration. A dedicated i-Floc injection point introduces the product directly into the mixing section.

The specially designed housing also incorporates a grounding connection for integration into the installation's bonding system.

Combining mixing, i-Floc injection and a grounding connection in one assembly, the i-Water WMF mixer provides a compact solution for pool water treatment systems.

			Pressure loss		
Type	Connector	Length	By 0,2 bar	By 0,3 bar	By 0,5 bar
WFM DN40	1½" SK	187	9,8 m³/h	11 m³/h	14,9 m³/h
WFM DN50	2" SK	225	15 m³/h	18 m³/h	23,7 m³/h
WFM DN65	2½" SK	268	21 m³/h	26 m³/h	33 m³/h
WFM DN80	3" flens	323	30 m³/h	37 m³/h	48 m³/h
WFM DN100	4" flens	395	45 m³/h	55 m³/h	72 m³/h
WFM DN125	5" flens	503	74 m³/h	90 m³/h	117 m³/h
WFM DN150	6" flens	575	96 m³/h	118 m³/h	152 m³/h
WFM DN200	8" flens	810	191 m³/h	234 m³/h	302 m³/h
WFM DN250	10" flens	1000	296 m³/h	362 m³/h	468 m³/h
WFM DN300	12" flens	1136	375 m³/h	459 m³/h	593 m³/h



Water Treatment Liquids

Water treatment liquids

At i-Water, we offer a comprehensive range of innovative liquid treatment solutions designed to improve water quality, maintain balanced water chemistry, and keep water clear, clean, and healthy.

All products are produced in house and work individually or as part of a complete automated water treatment system. By combining advanced chemistry with intelligent monitoring and dosing technology, i-Water helps ensure consistent water quality while reducing maintenance and optimizing system efficiency in a wide range of applications.



Product range :

- **Alkalinity Dose and Measurement solution** – Maintain stable alkalinity levels for balanced water chemistry and improved pH stability.
- **Phosphate Remover** – Effectively reduces naturally phosphate levels to help prevent algae growth and improve overall water quality.
- **TDS Reducer** – Lowers Total Dissolved Solids (TDS) to enhance water quality and support optimal system performance.
- **Natural Clarifier** – Improves water clarity naturally by binding fine suspended particles, leaving the water crystal clear.
- **Flocculation** – Promotes the formation of larger particles that can be easily removed by the filtration system.
- **Natural Bacterial Liquids** – A blend of beneficial bacteria that naturally break down organic contaminants, helping to maintain a clean and biologically balanced water system.
- **HeatCover** – The liquid pool cover, reducing water evaporation and energy loss

Water Condition / Requirement	i-Water Liquid	What It Does
Alkalinity is too low or requires rapid correction	Alka+ High Dose	Highly concentrated alkalinity treatment designed to quickly increase and stabilise alkalinity, particularly in systems with higher demand.
Alkalinity requires small, continuous adjustments	Alka+ Low Dose	Provides controlled alkalinity correction while helping maintain stable water chemistry and pH without overcorrection.
Accurate alkalinity measurement is required	Alka Solution	Dedicated measurement solution used with the i-Water Alkalinity Sensor to support reliable and stable alkalinity readings. It is a measurement consumable, not a correction liquid.
High phosphate levels / increased algae risk	i-Phos	Reduces phosphate levels, limiting nutrients available to algae while supporting clearer water and improved filtration performance.
TDS-focused industrial or wastewater treatment is required	i-TDS	Uses selected coagulants and flocculants to improve contaminant separation and support TDS reduction, wastewater treatment and water-reuse applications.
Water contains fine suspended particles or organic impurities	i-Clarifier	Chitosan-based natural clarification treatment that binds fine particles so they can be removed more effectively by the filtration system.
Cloudy water / particles are too fine for normal filtration	i-Floc	Combines fine particles, oils and suspended contaminants into larger flocs that can be removed through filtration, settling or vacuum cleaning.
Ion levels need to be maintained in electrolysis or hydrolysis systems	i-Ion	Restores and maintains the ionic concentration required for stable and efficient electrolysis and hydrolysis treatment.
Organic waste / biological imbalance in the water	i-Bact+	Beneficial bacterial treatment that helps break down organic waste and supports biological balance in ponds, pools, lakes and other aquatic environments.

i-Alka+

Alka+ – stable alkalinity control.

Alka+ is specially developed to maintain the alkalinity of water within the optimal range of 80–120 mg/L. Keeping alkalinity stable helps maintain consistent water quality and supports reliable pH control.

Combined with the i-Water Alkalinity Sensor and i-Water Controller, i-Water provides automatic monitoring and dosing. The controller continuously measures the alkalinity level and activates the dosing system whenever adjustment is required, ensuring the desired range is maintained.

For a complete solution, Alka+ can be dosed using i-Water Dosing Pumps, providing accurate, reliable, and fully automated chemical dosing for efficient water treatment.

Alka+ is available in High Dose and Low Dose formulations, allowing you to select the most suitable product for your application and dosing requirements.

The product is environmentally friendly and is supplied in 5L, 20 L, 400 L, and 800 L containers to meet both small- and large-scale installation needs.

For optimal storage, Alka+ should be kept at temperatures between 0°C and 50°C. The formulation remains stable during storage, and no mixer or agitation is required, making handling and maintenance simple and cost-effective.

Benefits

- Maintains alkalinity between 80–120 mg/L
- Supports stable water chemistry and improved pH control
- Compatible with the i-Water Alkalinity Sensor
- Fully automated with the i-Water Controller
- Accurate dosing with i-Water Dosing Pumps
- Available in High Dose and Low Dose formulations
- Environmentally friendly formulation
- Available in 5L 20 L, 400 L, and 800 L containers
- Storage temperature: 0°C to 50°C
- No mixer or agitation required during storage
- Reliable and easy-to-integrate solution for water treatment systems

Alka+ High Dose

- Highly concentrated alkalinity correction solution
- Rapidly increases and stabilizes alkalinity levels
- Maintains the recommended alkalinity range of 80–120 mg/L
- Ideal for systems with high alkalinity demand
- Compatible with i-Water Alkalinity Sensor and i-Water Controller
- Accurate dosing with i-Water Dosing Pumps
- Environmentally friendly formulation
- No mixer or agitation required during storage
- Storage temperature: 0°C to 50°C
- Available in 20 L, 400 L and 800 L containers



Alka+ Low Dose

- Optimized for low and continuous alkalinity correction
- Maintains stable alkalinity without overcorrection
- Supports consistent water chemistry and pH stability
- Maintains the recommended alkalinity range of 80–120 mg/L
- Designed for precise dosing applications
- Compatible with i-Water Alkalinity Sensor and i-Water Controller
- Suitable for automatic dosing with i-Water Dosing Pumps
- Environmentally friendly formulation
- No mixer or agitation required during storage
- Storage temperature: 0°C to 50°C
- Available in 5L, 20 L, 400 L and 800 L containers



Alka+ Solution

- Specially developed for accurate alkalinity measurement
- Used in combination with the i-Water Alkalinity Sensor
- Ensures reliable and stable sensor readings
- Supports accurate alkalinity monitoring and control
- Ready-to-use formulation
- Long-term stable composition
- Easy to handle and store (temperature: 0°C to 50°C)
- Available in 5 L containers (bigger volumes on demand)



i-Phos – Advanced Phosphate Control

i-Phos is i-Water's advanced phosphate removal solution, developed to effectively reduce phosphate levels and support clear, healthy water.

Based on a formulation with performance comparable to leading phosphate removal products on the market, i-Phos helps limit algae growth by reducing the nutrients algae depend on. This contributes to improved water quality, enhanced filtration efficiency, and reduced maintenance requirements.

The recommended dosing rate is comparable to other high performance phosphate removers, making i-Phos easy to integrate into existing water treatment programs.

For reliable and accurate dosing, i-Phos can be used with i-Water Dosing Pumps, providing consistent and automated phosphate control.



Benefits

- Effectively removes phosphates from water
- Helps prevent algae growth
- Improves water clarity and overall water quality
- Supports efficient filtration
- Suitable for automated dosing with i-Water Dosing Pumps
- Environmentally responsible formulation
- Available in 5L, 20 L, 400 L, and 800 L containers
- Dosing recommendations comparable to leading phosphate removal products

i-TDS – Advanced TDS Reduction

i-TDS is an advanced water treatment solution specifically developed to reduce Total Dissolved Solids (TDS) in water. The product combines carefully selected coagulants and flocculants to improve the removal of dissolved and suspended contaminants, resulting in more efficient water treatment.

Primarily designed for industrial water treatment and wastewater reduction, where lowering TDS levels can improve process efficiency, reduce discharge loads, and support water reuse applications.

The synergistic combination of coagulants and flocculants promotes the formation of larger, denser particles that can be more easily separated through filtration, clarification, or other treatment processes.



Benefits

- Reduces Total Dissolved Solids (TDS)
- Advanced blend of coagulants and flocculants
- Designed for industrial water treatment and wastewater applications
- Improves the efficiency of solid-liquid separation
- Supports water reuse and wastewater reduction
- Suitable for automated dosing with i-Water Dosing Pumps
- Easy to integrate into existing treatment systems
- Available in 5L, 20 L, 400 L, and 800 L containers

i-Clarifier – Natural Water Clarification

i-Clarifier is a natural water clarification solution based on chitosan, a naturally derived active ingredient known for its excellent binding and clarification properties. Designed to deliver crystal-clear water, i-Clarifier works by binding fine suspended particles and organic impurities, allowing them to be more effectively removed by the filtration system. The result is improved water clarity, cleaner water, and reduced maintenance requirements.

Thanks to its natural formulation, i-Clarifier is suitable for a wide range of applications, including systems where aquatic life is present. The product can be safely used in water environments with fish, making it an ideal solution for ponds, natural water systems, and other applications requiring gentle yet effective clarification.



Benefits

- Natural clarification solution based on chitosan
- Produces crystal-clear water
- Binds fine suspended particles and organic contaminants
- Improves filtration efficiency
- Suitable for use in water systems containing fish
- Gentle and environmentally responsible formulation
- Suitable for automatic dosing with i-Water Dosing Pumps
- Easy integration into existing water treatment systems
- Comparable dosing to professional chitosan-based clarifier solutions
- Available in 5L, 20 L, 400 L, and 800 L containers

i-Floc – Advanced Pool Flocculation Solution

i-Floc is a professional flocculation solution designed to improve water clarity in swimming pools and water treatment systems. The product helps bind fine suspended particles that are too small to be effectively removed by standard filtration, allowing them to form larger particles that can be easily removed.

When added to the water, i-Floc combines fine impurities, oils, and suspended contaminants into larger flocs. These particles can then settle to the bottom of the pool, where they can be efficiently removed by vacuum cleaning or filtration.

i-Floc is an effective solution for restoring water clarity and improving the performance of the filtration system, especially when dealing with cloudy water caused by fine suspended particles.

For optimal results, i-Floc can be integrated into a complete i-Water water treatment program and combined with i-Water Dosing Pumps for accurate and controlled dosing.



Benefits

- Improves water clarity in swimming pools
- Effectively removes fine suspended particles
- Creates larger flocs for easier removal
- Allows settled dirt to be vacuumed from the pool floor
- Enhances filtration efficiency
- Helps restore crystal-clear water
- Suitable for professional and automated dosing systems
- Compatible with i-Water Dosing Pumps
- Easy integration into existing water treatment programs
- Available in 5 L, 20 L, 400 L, and 800 L containers

i-Ion – Balancing Solution for Electrolysis & Hydrolysis Systems

i-Ion is a specially developed ion solution designed to maintain the required ion concentration in electrolysis and hydrolysis water treatment systems. By supplying essential ions, i-Ion supports the efficiency, stability, and long term performance of these advanced water treatment technologies.

Electrolysis and hydrolysis systems rely on the correct ionic balance in the water to operate effectively. Over time, ion concentrations can decrease due to water replacement, dilution, or normal system operation.



i-Ion helps restore and maintain the optimal ion level, ensuring consistent performance of the treatment process.

Used as part of a complete i-Water water treatment solution, i-Ion supports reliable operation, improved system stability, and optimized treatment efficiency.

For accurate and controlled dosing, i-Ion can be combined with i-Water Dosing Pumps, allowing automatic maintenance of the required ion concentration.

Benefits

- Maintains optimal ion concentration for electrolysis and hydrolysis systems
- Supports stable and efficient water treatment performance
- Helps maintain consistent operation of ion-based treatment technologies
- Reduces performance fluctuations caused by ion depletion
- Suitable for automated dosing with i-Water Dosing Pumps
- Easy integration into existing electrolysis and hydrolysis installations
- Supports reliable long-term system operation
- Available in 5L, 20 L, 400 L, and 800 L container

i-Bact+ – Natural Bacterial Water Treatment Solution

i-Bact+ is a versatile natural bacterial culture developed to support the biological balance and maintenance of a wide range of water systems, including natural ponds, swimming pools, lakes, and other aquatic environments.

The specially selected beneficial bacteria in i-Bact+ help naturally break down organic waste, reduce the accumulation of unwanted contaminants, and support a cleaner and healthier water environment. By improving the biological balance of the water, i-Bact+ contributes to better water quality, reduced maintenance, and improved ecosystem stability.

i-Bact+ works in harmony with natural processes, making it suitable for applications where maintaining a balanced aquatic environment is essential. It can be used as part of a complete i-Water water treatment program to support long-term water quality management.

For consistent and accurate application, i-Bact+ can be dosed using i-Water Dosing Pumps, ensuring optimal distribution and controlled treatment.



Benefits

- Natural bacterial culture for water maintenance
- Supports biological balance in aquatic environments
- Helps break down organic waste and impurities
- Improves water quality and clarity
- Suitable for natural ponds, swimming pools, lakes, and water features
- Supports healthier aquatic ecosystems
- Reduces maintenance requirements
- Environmentally responsible water treatment solution
- Suitable for automated dosing with i-Water Dosing Pumps
- Easy integration into existing water treatment programs
- Available in 20 L containers

HeatCover

The Invisible Liquid Pool Cover. Reduce evaporation. Save water. Reduce energy.

HeatCover is a biodegradable liquid evaporation-control solution that forms an extremely thin, invisible layer on the pool surface. Because the liquid has a lower density than water, it naturally rises to the surface and creates a barrier that helps slow down evaporation.

Why HeatCover?

- Up to 50% less water evaporation
- Energy reduction (required for pool heating)
- 100% invisible
- Fully automatic : once installed and programmed, the dosing system operates automatically every day.
- Easy to Integrate : suitable for both new installations and existing plant rooms.



How it works

1. Automatic dosing : HeatCover is dosed into the pool circulation system automatically.
2. Distributed through the pool : The circulation system spreads the liquid throughout the water.
3. Rises to the surface : The liquid naturally moves to the water surface.
4. Invisible barrier forms : A microscopic surface layer helps reduce water evaporation.
5. Repeated automatically : The system doses the required amount once per day — no manual application required.

HeatCover products

HeatCover Liquid

The evaporation-control liquid that forms the invisible barrier on the water surface.

Available volumes:
5 L · 20 L · 400 L · 800 L



Suction Lance

Installed directly into the HeatCover container and connected to the dosing pump. Purpose: Draws the liquid cleanly and consistently from the container into the dosing system.

Drip Tray

Placed underneath the HeatCover container.

Dosing Pump Basic

Designed for smaller pools and lower dosing requirements.

- Automatic daily dosing
- Peristaltic pump
- Suitable for smaller residential projects



Dosing Pump Pro

Designed for larger pools and more demanding installations.


- Membrane pump
- Suitable for larger and professional projects



Pricing and ordering

i-Water products are priced as attractively as possible due to the direct distribution method for ordering. End customers (pool owner) order with i-Water partners, i-Water partners order directly. This allows for healthy dealer margin and attractive prices for pool owners.

The i-Water price lists are supplied as separate attachments alongside the product catalogue. The price lists show the recommended end-customer prices. I-Water partners are registered and receive confirmation of their purchase discount. Always up-to-date pricelists can be accessed through the i-Water webshop (for partner with an account).

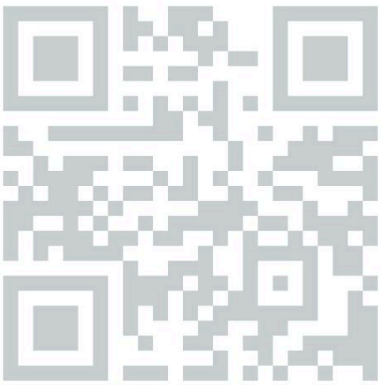

Become an i-Water partner and gain immediate access to a highly attractive product portfolio that offers direct benefits for installers, maintenance providers, and owners alike. Partners purchase directly from i-Water, ensuring consistently attractive pricing.

How do you become an i-Water partner? Register your account at www.i-water.be.