



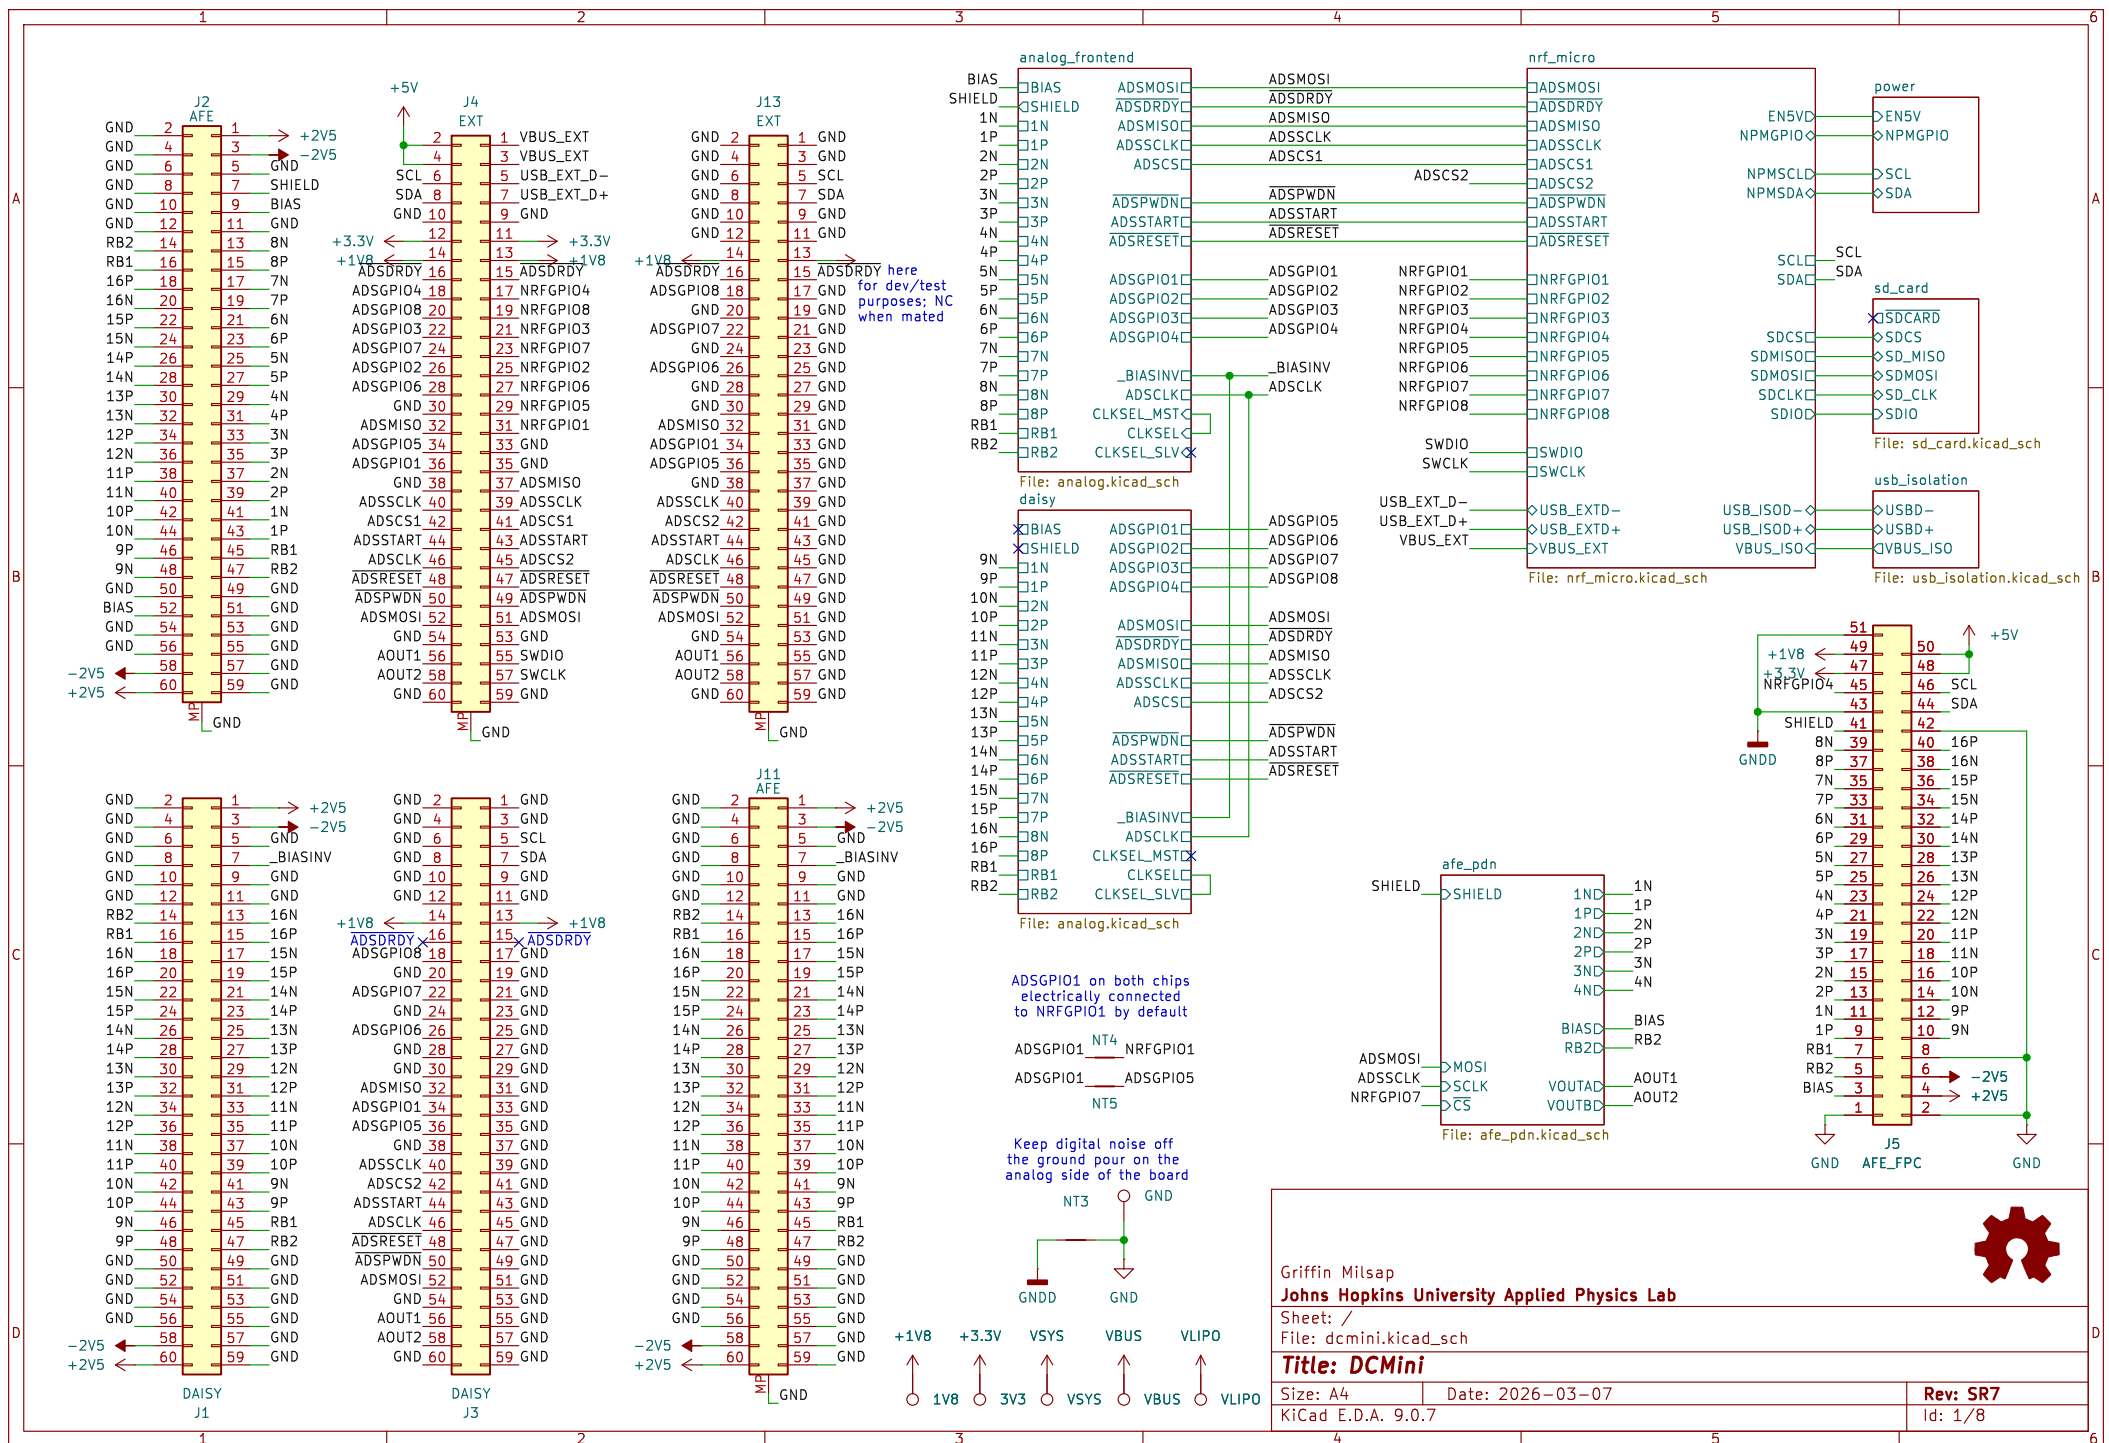


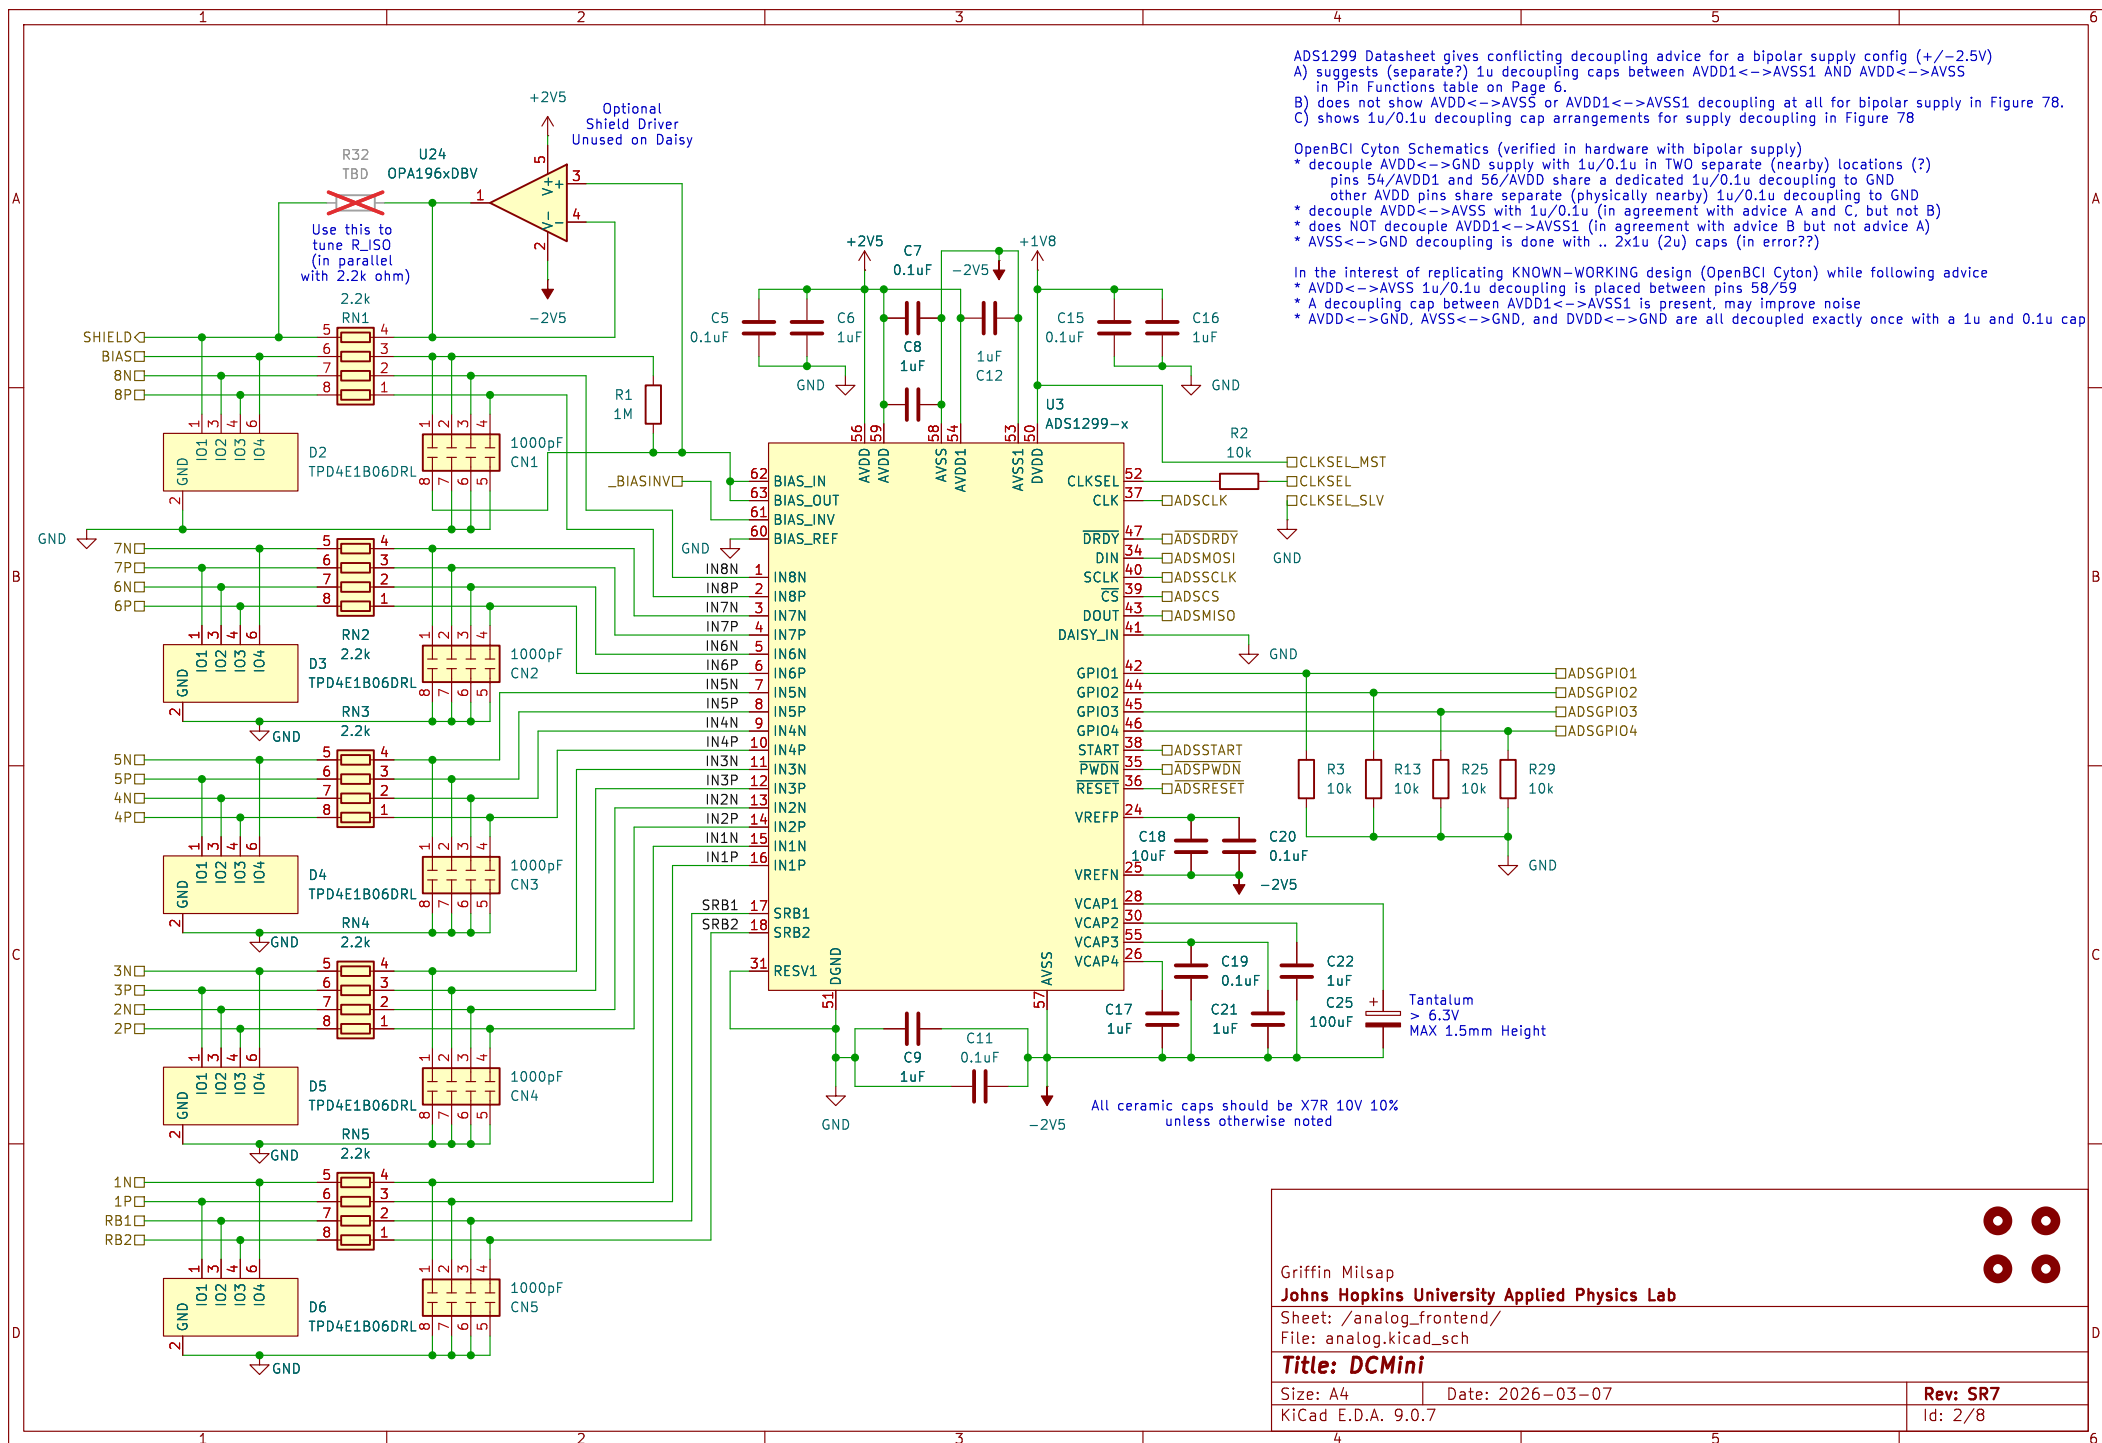

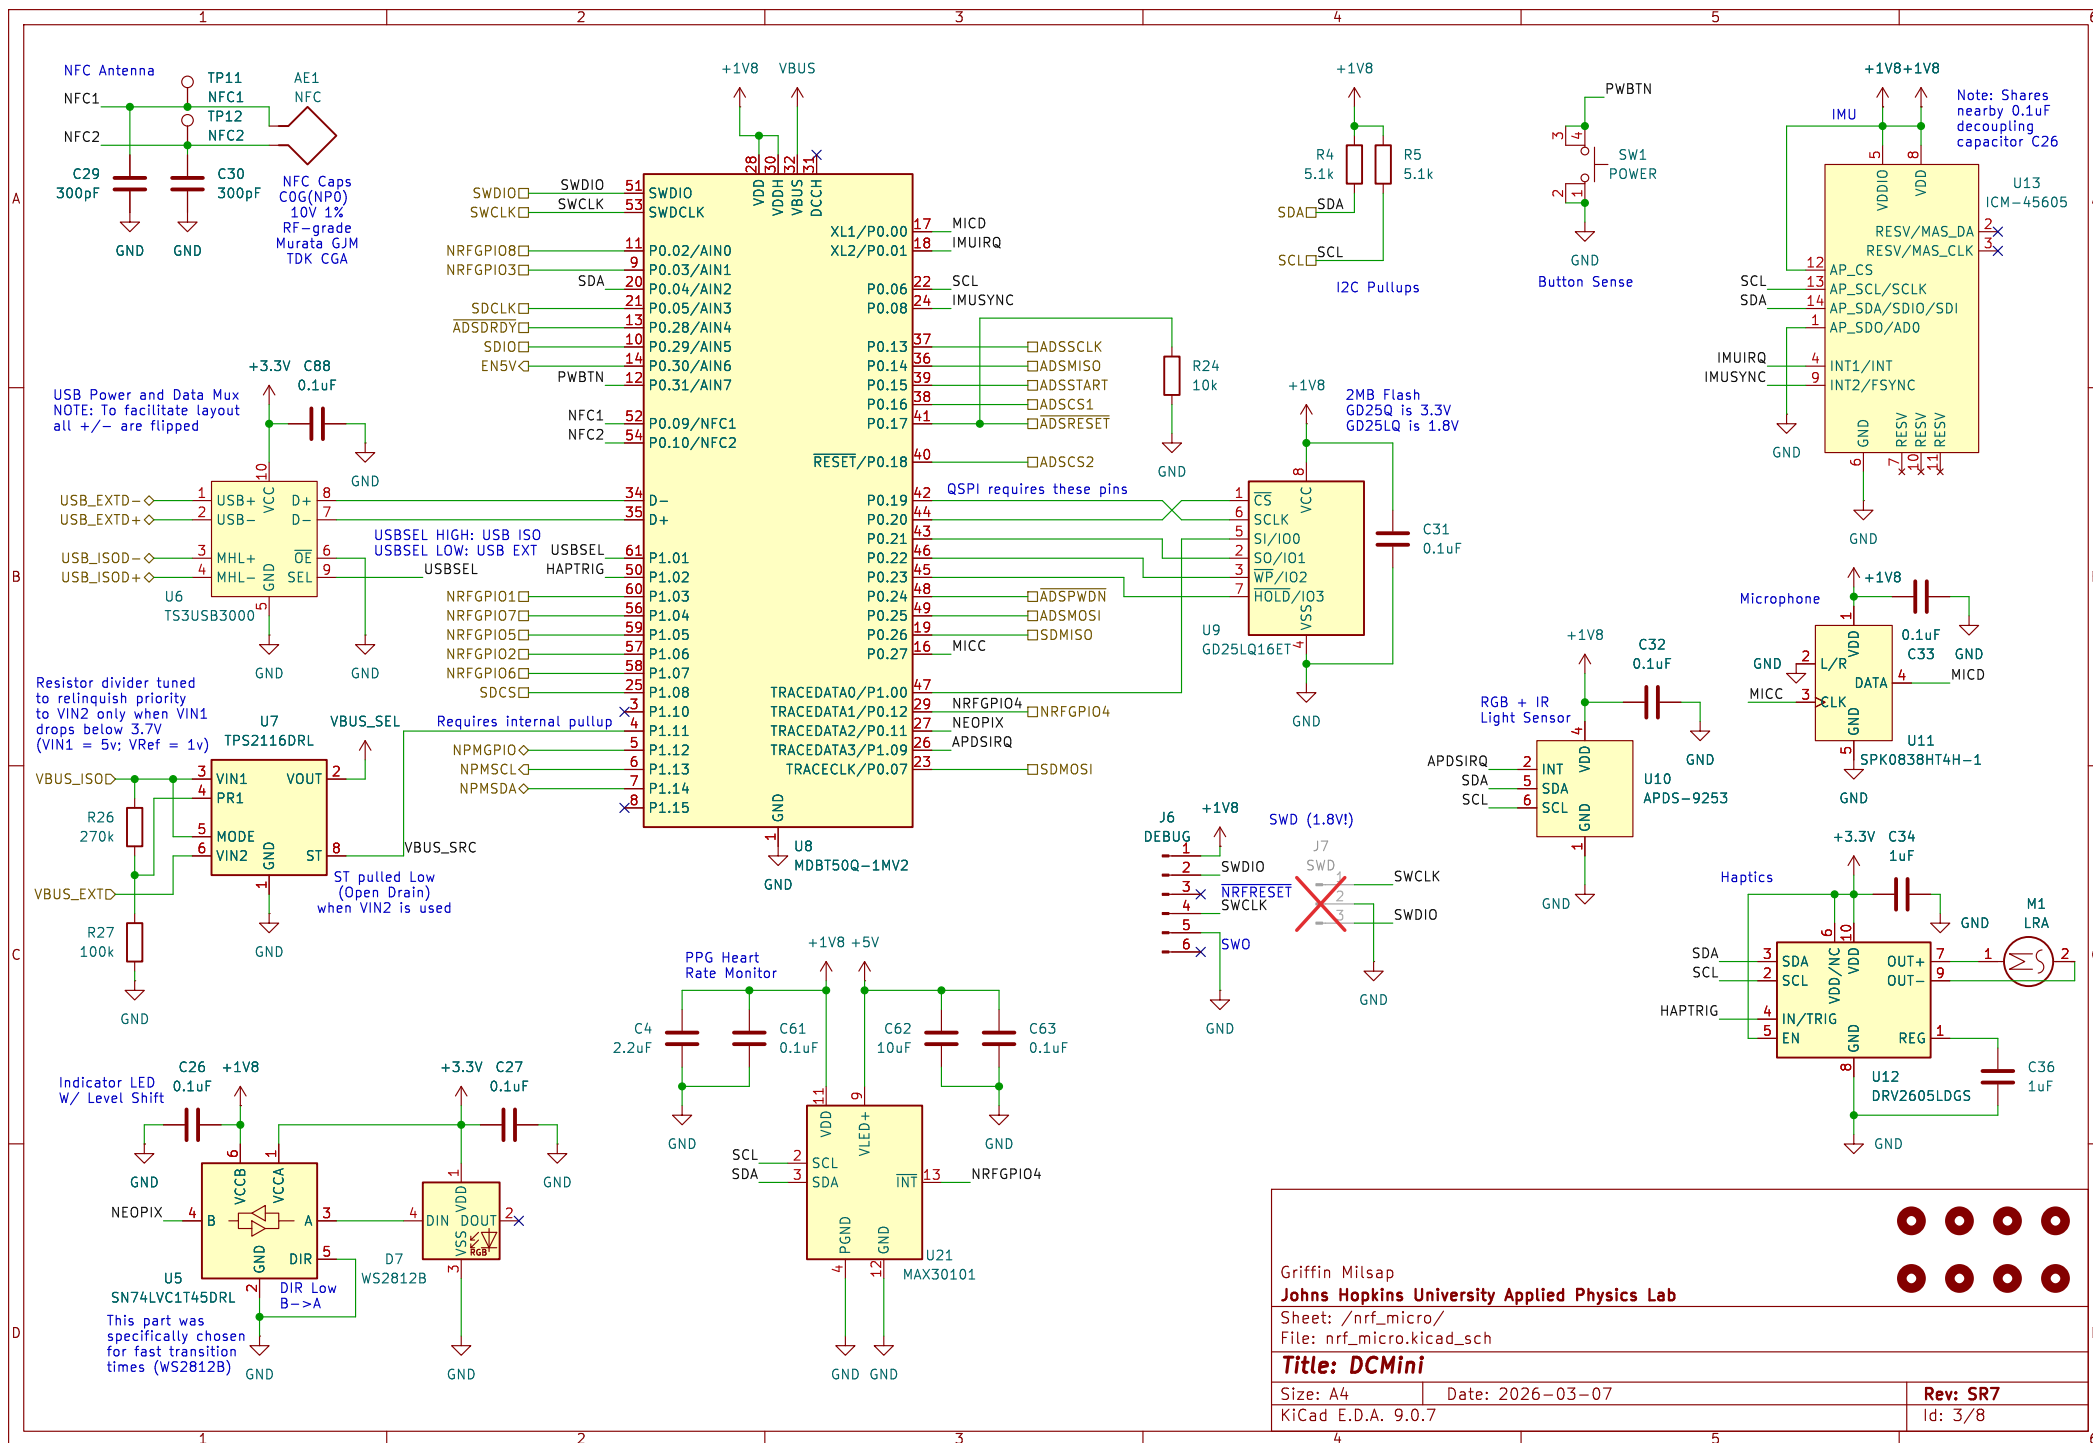

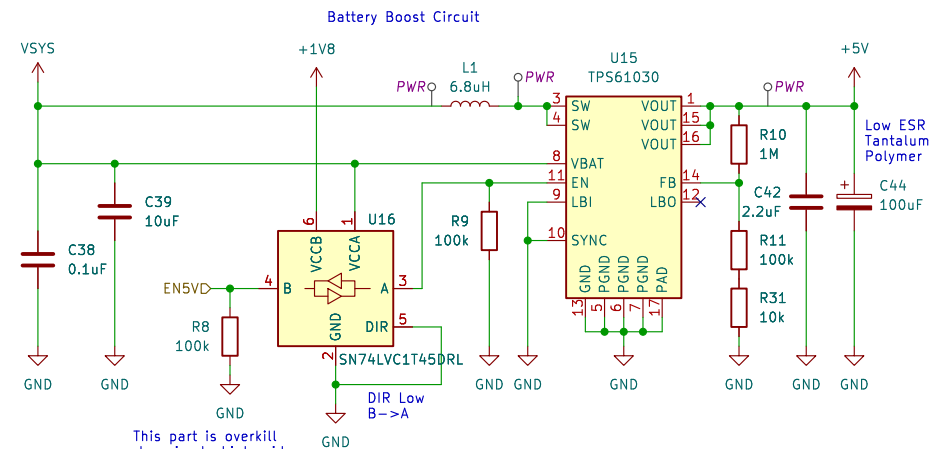

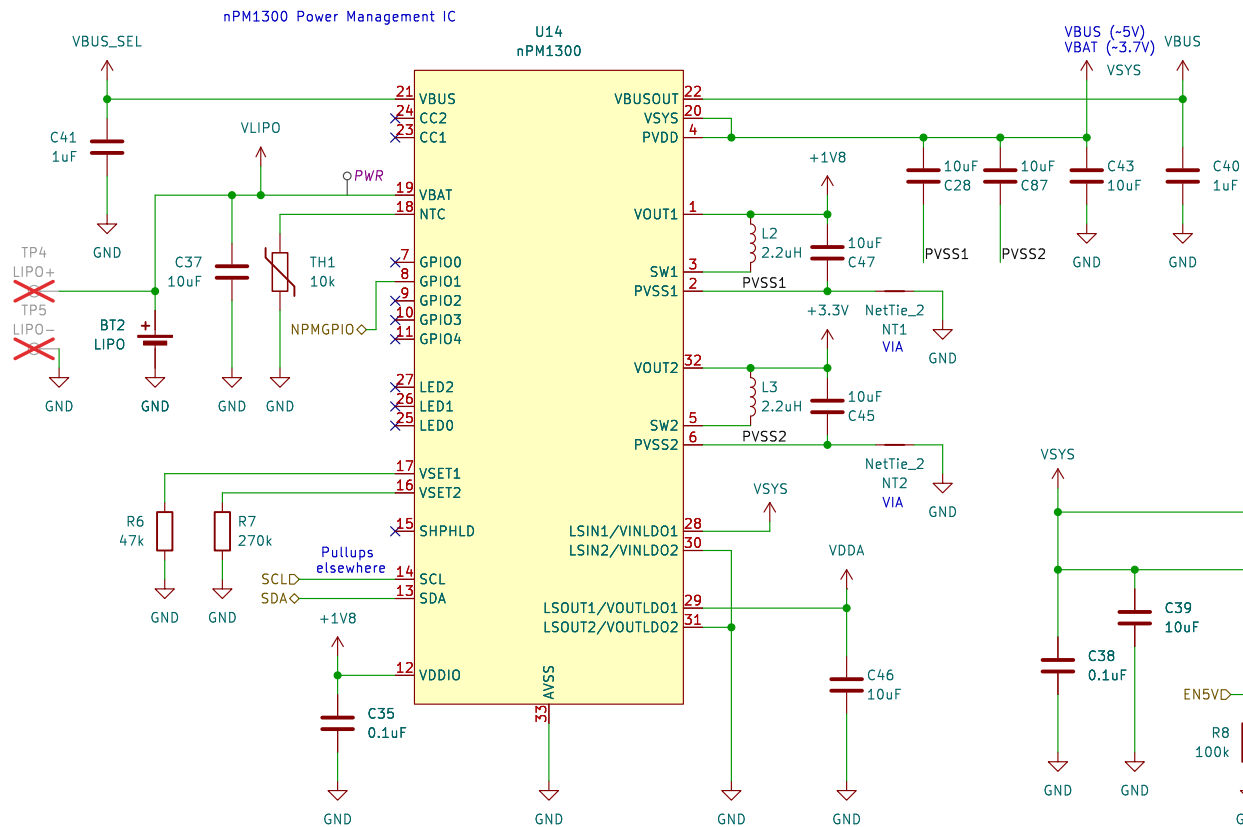

This part is overkill
and a simple high-side
switch would do the trick.
This was done in the name
of BOM optimization.

Griffin Milsap
Johns Hopkins University Applied Physics Lab

Sheet: /power/
File: power.kicad_sch


Title: DCMini

Size: A4 Date: 2026-03-07

KiCad E.D.A. 9.0.7

Rev: SR7

Id: 4/8

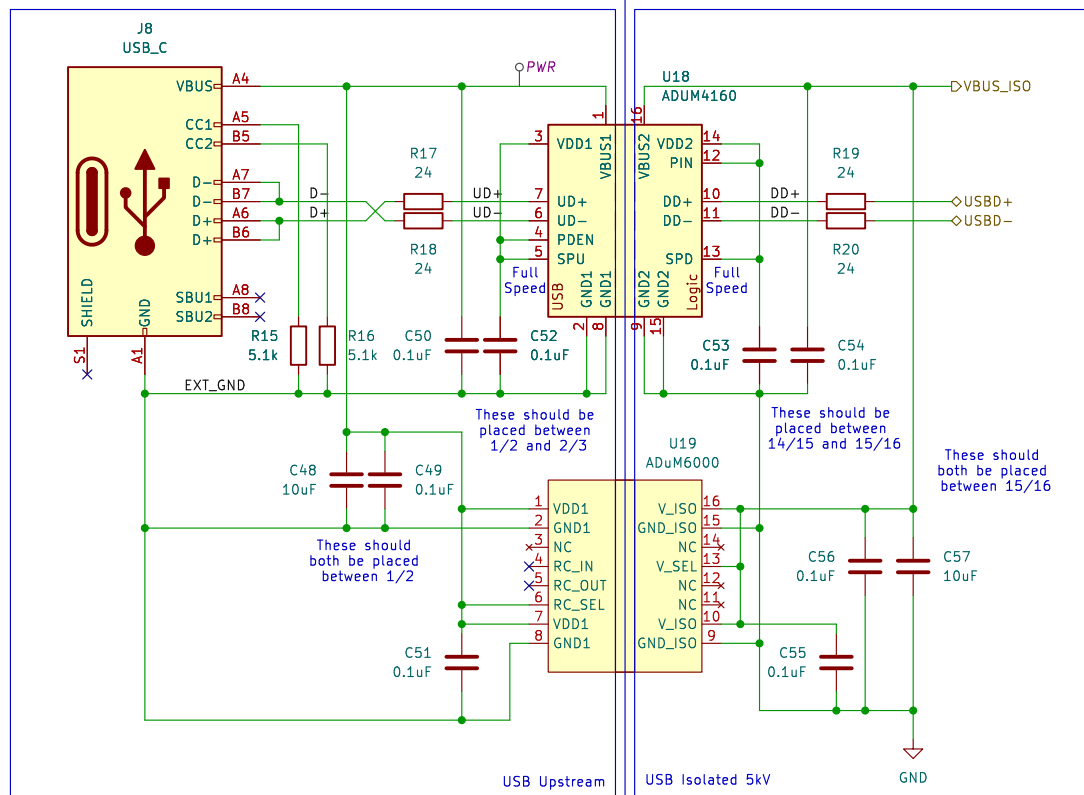

Schematic based on Adafruit USB Isolator
<https://github.com/adafruit/Adafruit-USB-Isolator-PCB>
 Substituted ADUM6000 in place of ADUM5000
 ADUM6000 provides 80mA/5kV isolation instead of 100mA/2.5kV
 Limited to USB Full-Speed (12 Mbps)
 Limited to 80mA supply current to VBUS

Johns Hopkins University Applied Physics Lab

Sheet: /usb_isolation/
 File: usb_isolation.kicad_sch


Title: DCMini

Size: A4 Date: 2026-03-07

KiCad E.D.A. 9.0.7

Rev: SR7

Id: 5/8

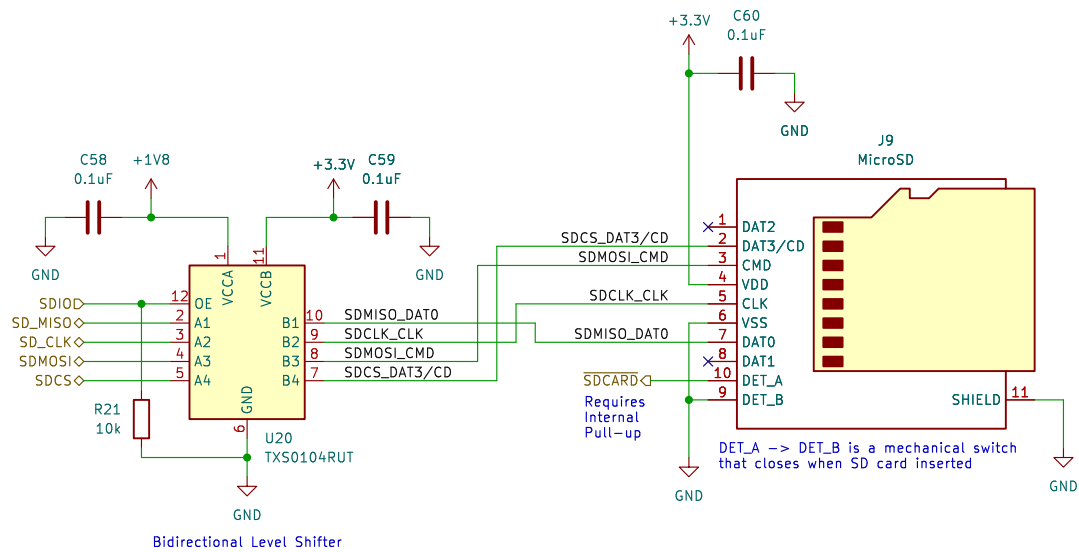

Griffin Milsap
Johns Hopkins University Applied Physics Lab

Sheet: /sd_card/
 File: sd_card.kicad_sch


Title: DCMini



Size: A4 Date: 2026-03-07

KiCad E.D.A. 9.0.7

Rev: SR7

Id: 6/8

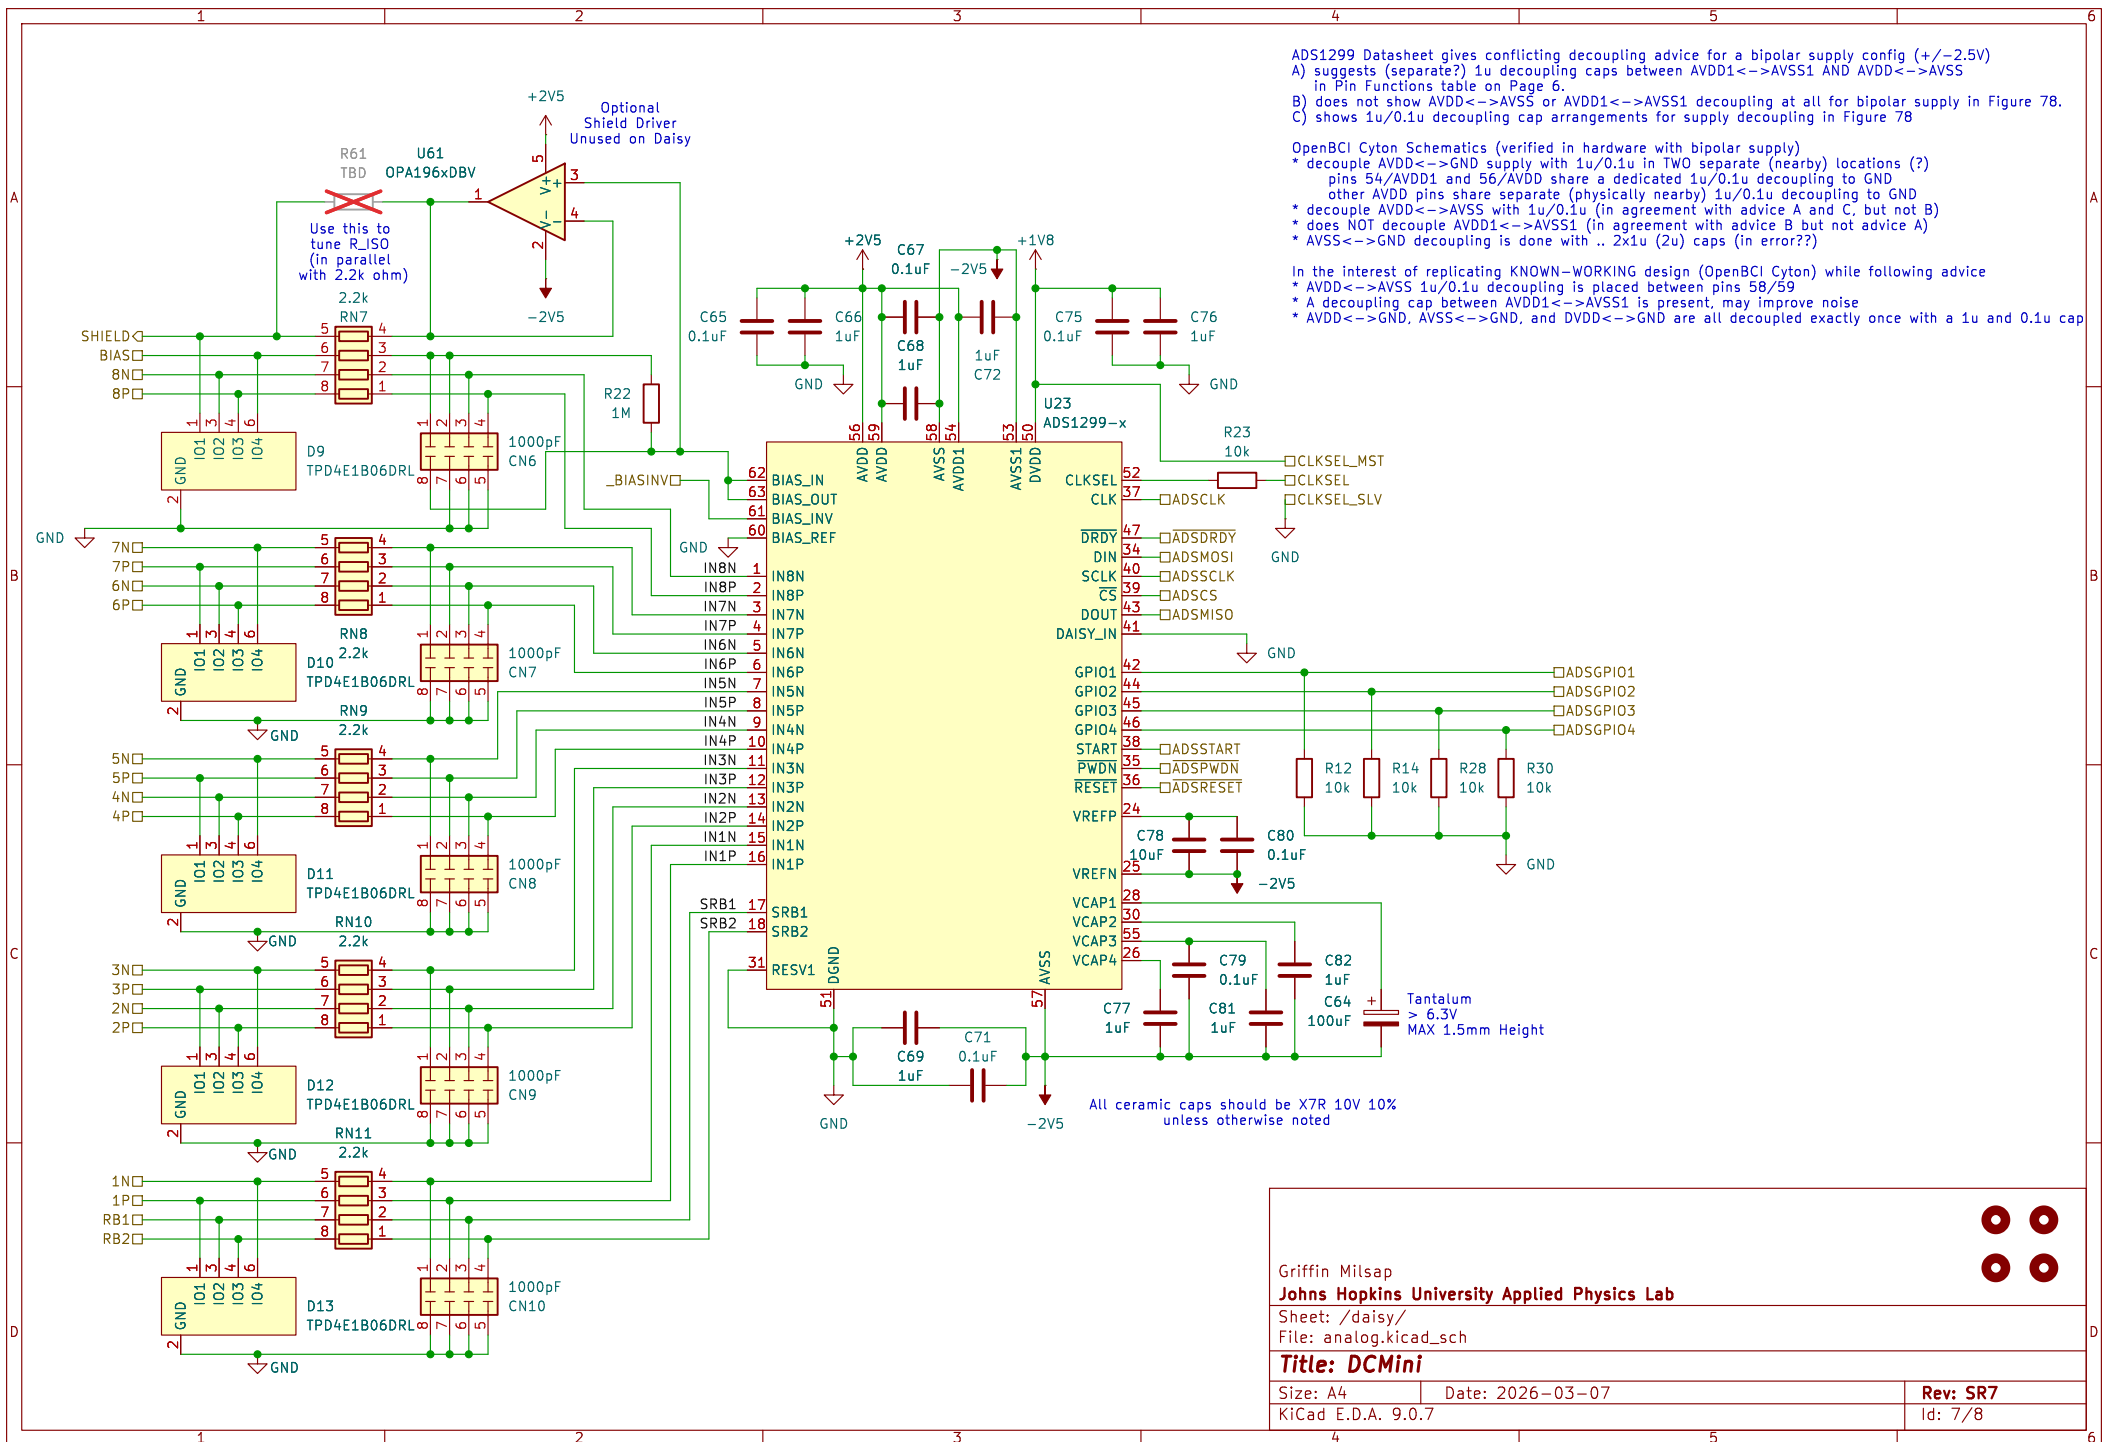

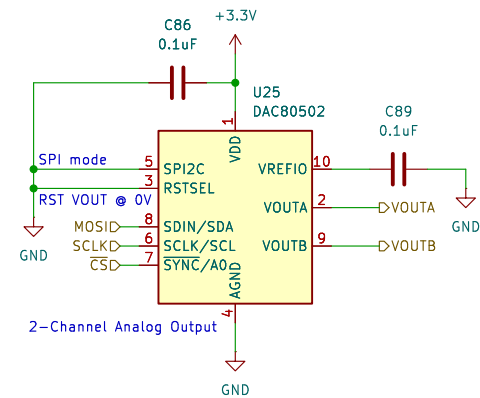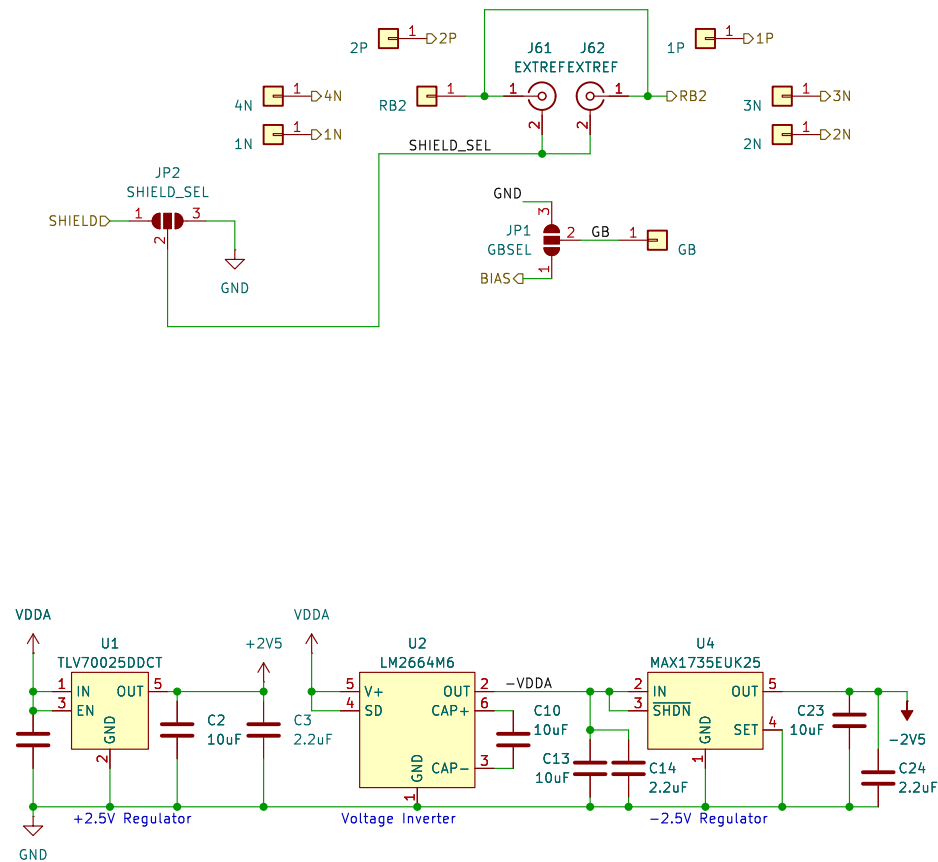

Griffin Milsap
Johns Hopkins University Applied Physics Lab

Sheet: /afe_pdn/
 File: afe_pdn.kicad_sch

Title: DCMini

Size: A4 Date: 2026-03-07

KiCad E.D.A. 9.0.7

Rev: SR7

Id: 8/8