

Name grading key

Homework Assignment #5
due in class Friday, October 7

Cover sheet : Staple this page in front of your solutions.

Write the *answers* (without calculations) on this page;
write the detailed *solutions* on your own paper.

[21] Problem 3.4.**

Answer: Suppose $M_{\text{cart}} = 3 m_{\text{hobo}}$. Then the ratio $v_{\text{final}}(b) / v_{\text{final}}(a)$ is ...
 $(M_c + 1.5 m_h) / (M_c + m_h) = 9/8$

[22] Problem 3.5.** ***(There is no answer to report here.)***

[23] Problem 3.6.* ***Answer: the thrust, in tons, is***
4170

[24] Problem 3.10.* ***Answer: the mass when p is maximum is ...***
 $0.368 m_0$


[25] Problem 3.12.**
Answer: the final speed for the two-stage rocket is ...
 $1.050 v_{\text{ex}}$

[26] Problem 3.13.** ***The height at $t = 120$ s is ...***
39.9 km

Homework Assignment #5

Problem 3.4

Two hobos on a hand cart ...

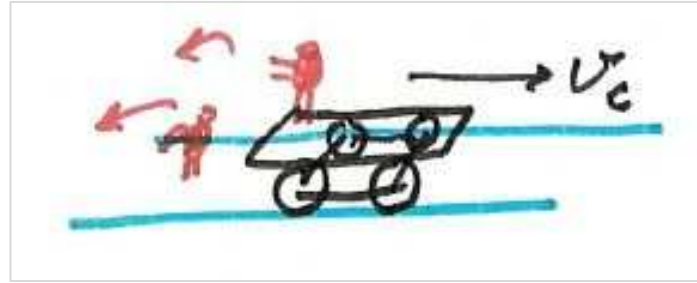

(a) If they jump simultaneously then

momentum is conserved $\Rightarrow M_c v_c + 2m_h (v_c - u) = 0$

thus

$$v_c = \frac{2m_h u}{M_c + 2m_h} = \frac{m_h u}{M_c + 2m_h} [2]$$

(b) If they jump one after the other then

$$1. \text{ first jump } \Rightarrow (M_c + m_h) v_1 + m_h (v_1 - u) = 0$$

$$2. \text{ second jump } \Rightarrow M_c v_2 + m_h (v_2 - u) = (M_c + m_h) v_1$$

These are two equations for two unknowns (v_1 and v_2).

We want the final speed of the car = v_2 .

After a bit of algebra, the answer is

$$v_2 = \frac{m_h u}{M_c + 2m_h} \left[\frac{2M_c + 3m_h}{M_c + m_h} \right]$$

- The second procedure gives greater speed to the car.

Problem 3.5


An elastic collision with equal masses ...

Equal masses, and one particle is initially at rest.

Before the collision:



After the collision:



Conservation laws

Momentum $m \mathbf{v}_1 = m \mathbf{v}_1' + m \mathbf{v}_2' \Rightarrow \mathbf{v}_1 = \mathbf{v}_1' + \mathbf{v}_2' \quad (1)$

Kinetic energy $\frac{1}{2} m v_1^2 = \frac{1}{2} m v_1'^2 + \frac{1}{2} m v_2'^2$
 $\Rightarrow v_1^2 = v_1'^2 + v_2'^2 \quad (2)$

By eq. (1)

$$v_1^2 = (\mathbf{v}_1' + \mathbf{v}_2')^2 = v_1'^2 + v_2'^2 + 2 \mathbf{v}_1' \cdot \mathbf{v}_2'$$

Comparison to eq. (2) implies $\mathbf{v}_1' \cdot \mathbf{v}_2' = 0$.

That is, *the final velocities must be perpendicular.*

Problem 3.6

The Saturn V rocket ...



The rocket equations are

$$dm/dt = -K \quad \text{and} \quad v = v_{\text{ex}} \ln (m_0 / m).$$

We have these parameters:

$$K = 15 \times 10^3 \text{ kg/s}; \quad v_{\text{ex}} = 2500 \text{ m/s}.$$

The calculation :::

$$\text{Thrust} = m dv/dt = K v_{\text{ex}} = 37.5 \times 10^6 \text{ N} \quad \text{x(1 ton / } 9 \times 10^3 \text{ N)}$$

$$= 4170 \text{ tons of force.}$$

Compare that to the initial weight = 3000 tons.

Problem 3.10

A rocket in deep space ...

A rocket accelerates from rest in deep space.

Calculate the *maximum momentum* of the rocket.

The rocket equation (there is no external force) is

$$v(t) = v_{\text{ex}} \ln [m_0 / m(t)].$$

The momentum at time t is $p(t) = m(t) v(t)$, so

$$p = m v_{\text{ex}} \ln [m_0 / m].$$

To find the maximum momentum, set $dp / dm = 0$.

$$\frac{dp}{dm} = v_{\text{ex}} \ln \left(\frac{m_0}{m} \right) - v_{\text{ex}}$$


Therefore $dp/dm = 0$ implies

$$\ln \left(\frac{m_0}{m} \right) = 1$$

That is, $m = m_0 / e = 0.368 m_0$.

The maximum momentum is

$$\begin{aligned} p_{\text{max}} &= (m_0 / e) v_{\text{ex}} \ln [m_0 / (m_0 / e)] \\ &= m_0 v_{\text{ex}} / e \\ &= 0.368 m_0 v_{\text{ex}} . \end{aligned}$$

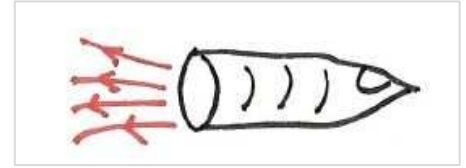

Problem 3.12

A two - stage rocket ...

(a) First, consider a single-stage rocket;

$$\begin{aligned} v_{\text{final}} &= v_{\text{ex}} \ln (m_0 / m_{\text{final}}) = v_{\text{ex}} \ln [m_0 / (0.4 m_0)] \\ &= v_{\text{ex}} \ln (5/2) \end{aligned} \quad = 0.916 v_{\text{ex}}$$

(b) Now, two stages;

1. the first stage ($m_0 \rightarrow m_1 = 0.7 m_0$)

$$v_1 = v_{\text{ex}} \ln (m_0 / m_1) = v_{\text{ex}} \ln [m_0 / (0.7 m_0)] = v_{\text{ex}} \ln (10/7)$$


2. the second stage ($m_1' \rightarrow m_2 = 0.3 m_0$) [where $m_1' = m_1 - 0.1 m_0$]

$$\begin{aligned} v_2 &= v_1 + v_{\text{ex}} \ln [(m_1 - 0.1 m_0) / (m_1 - 0.1 m_0 - 0.3 m_0)] \\ &= v_{\text{ex}} \{ \ln(10/7) + \ln(6/3) \} = v_{\text{ex}} \ln (20/7) \end{aligned} \quad = 1.050 v_{\text{ex}}$$

- The two-stage rocket reaches a larger final speed.

Problem 3.13

A rocket taking off in Earth's gravity ...

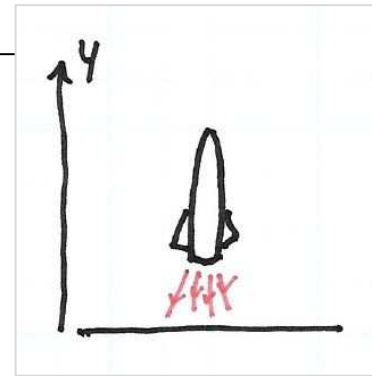

The velocity of a rocket accelerating upward in Earth's gravity (near the Earth's surface and starting from rest) is

$$v(t) = v_{\text{ex}} \ln [m_0 / (m_0 - K t)] - g t.$$

The height at time t is

$$y(t) = \int_0^t v(t') dt' = \int_0^t \{ v_{\text{ex}} \ln (m_0) - \ln (m_0 - K t') - g t' \} dt'$$

$$\begin{aligned} y(t) &= \int_0^t v(t') dt' \\ &= \int_0^t [v_{\text{ex}} \ln m_0 - v_{\text{ex}} \ln (m_0 - K t') - g t'] dt' \\ &= v_{\text{ex}} (\ln m_0) t - \frac{1}{2} g t^2 - v_{\text{ex}} \underbrace{\int_0^t \ln (m_0 - K t') dt'}_A \end{aligned}$$

$$\begin{aligned} \text{Let } x &= m_0 - K t' \\ dx &= -K dt' \\ A &= \frac{-1}{K} \int_{m_0}^m \ln x dx = \frac{-1}{K} (x \ln x - x) \Big|_{m_0}^m \\ &= \frac{-1}{K} [m \ln m - m - m_0 \ln m_0 + m_0] \\ &\quad \text{where } m = m_0 - K t. \end{aligned}$$

$$\begin{aligned} y(t) &= -\frac{1}{2} g t^2 + v_{\text{ex}} (\ln m_0) t \\ &\quad + \frac{v_{\text{ex}}}{K} [m_0 \ln m - K t \ln m - m_0 \ln m_0 + K t] \\ &= (\text{algebra}) = -\frac{1}{2} g t^2 + v_{\text{ex}} t - \frac{m v_{\text{ex}}}{K} \ln \left(\frac{m_0}{m} \right) \end{aligned}$$

The numerical calculation for Space Shuttle parameters

$$m_0 = 2 \times 10^6 \text{ kg}; \quad K = 1 \times 10^6 \text{ kg}/(120 \text{ s}); \quad v_{\text{ex}} = 3000 \text{ m/s};$$

then the height at time $t = 120 \text{ s}$ is

$$y(120 \text{ s}) = 39.9 \text{ km}.$$