



ARO, assembly power relative to C9-47


C9-12 vs C9-47: max 2.64 %, rms 1.48 %

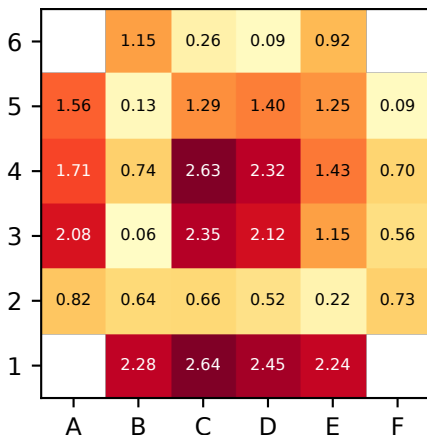


C9-34 vs C9-47: max 1.74 %, rms 0.79 %

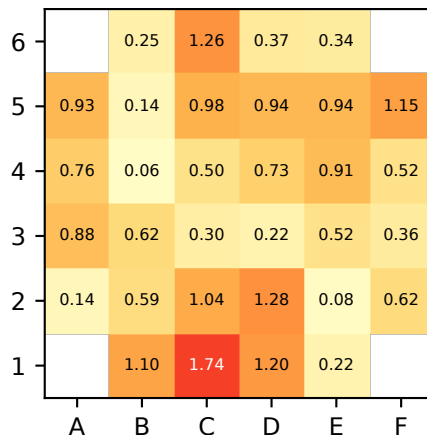


C9-35 vs C9-47: max 1.88 %, rms 0.89 %

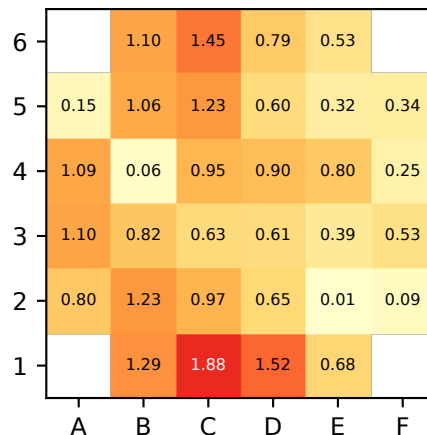


C9-40 vs C9-47: max 1.85 %, rms 1.06 %

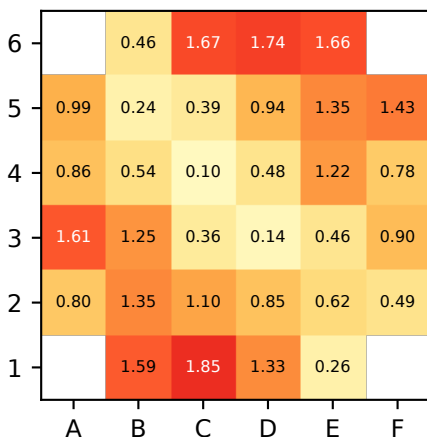

C9-44 vs C9-47: max 2.01 %, rms 0.80 %

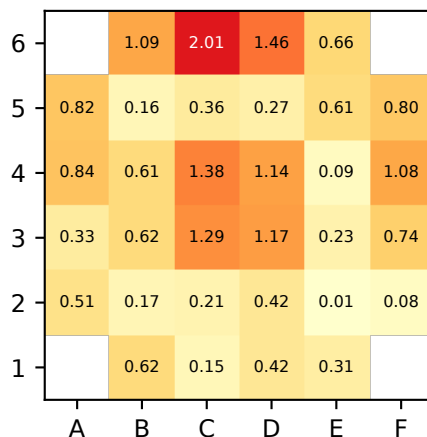

C9-58 vs C9-47: max 2.31 %, rms 1.01 %

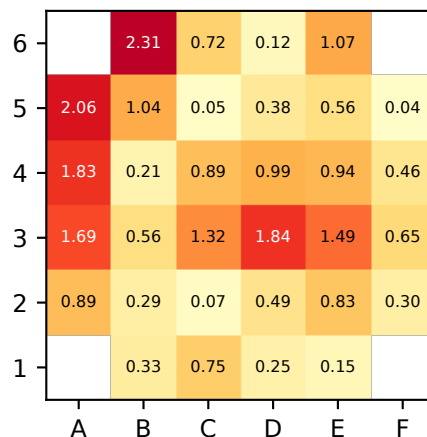

relative difference (%)

2.5

2.0

1.5

1.0

0.5

0.0