

19th Airlift Wing



Airfield Driving Training

19 OSS /OSAA

Airfield Management

Currency Date: 16 Sept 24

BLACK KNIGHTS



Overview



- Flight Line Driving
- Vehicle requirements
- Speed Limits
- Towing Operations
- Parking and Chocking Requirements
- Do not park vehicles or equipment closer than
- Operating Vehicles in the Vicinity of Aircraft
- Runway incursions
- Airfield Markings/Signs
- Restricted Area
- Operating in the CMA
- Construction
- FOD Control/Prevention
- Tower Communication
- Phonetic Alphabet
- Nighttime operation
- Airfield Lighting
- Airfield Map



Airfield Driving



PER AFI13-213 CHAPTER 2.10

A VALID AF FORM 483 (**AIRFIELD DRIVERS
LICENSE**) MUST BE IN THE DRIVER'S
POSSESSION WHEN OPERATING A VEHICLE
AND/OR NON-VEHICLE EQUIPMENT ON THE
AIRFIELD



Vehicle requirements



All vehicles operating on the airfield must contain:

- 2-way radio (If operating within the CMA)
- DAFVA 11-240, *USAF Airport Signs and Markings*
- DAFVA 13-222, *Runway/ Controlled Movement Area Procedures*
- Most up to date Airfield Diagram
- FOD Can (Foreign Object Damage)



Towing Operations



Towing speed is 5 MPH for all aircraft and two or more maintenance stands. Towing speed for one maintenance stand is 10 MPH. Towing speed for AGE such as compressors ground power units, air start carts, and similar equipment is 15 MPH.



Speed Limits



- Flight line Road: 15 MPH
- Vehicle Parking Areas: 5 MPH
- Perimeter Roads: 15 MPH
- Aircraft Parking Ramp or within 200ft of area: 15 MPH (Note: within 50 feet of any aircraft: 5 MPH)
- Taxiways: 15 MPH (within 25 feet of any aircraft: 5 MPH)
- Runway/Assault Zone: 30 MPH
- During reduced visibility, snow, or ice conditions: 10 MPH



Parking and Chocking Requirements



Do Not Park Vehicles or Equipment Closer Than:

- 1,000 feet from Runway centerline
- 200 feet from Taxiway centerline
- 125 feet from edge of Apron
- 25 feet of any aircraft, unless fueling or servicing the aircraft



Parking and Chocking Requirements



1. **NEVER** leave a vehicle unattended on the Runway, Assault Zone, or Taxiways.
2. Vehicles left unattended on the parking apron must adhere to the following:
 - Vehicles will be parked as to not interfere with aircraft being towed or taxiing.
 - Engine will be turned off and keys left in the ignition.
 - The transmission will be placed in park (automatic) or reverse (manual).
 - Parking or Emergency brake will be set. Vehicles that do not have an internal braking system will have chocks placed in front of and behind one of the rear wheels.
 - Vehicle doors will remain unlocked.



Operating Vehicles in the Vicinity of Aircraft

- Aircraft **ALWAYS** have the right of way.
- **DO NOT** drive between aircraft and the “Follow Me” vehicle.
- **DO NOT** drive on taxiway shoulders (Outside the lights).
- No vehicle will park or pass closer than 25 feet in front of or 200 feet to the rear of an aircraft that has its engines running.
- When approaching a parked aircraft always approach with the driver’s side of the vehicle towards the aircraft.
- Always drive on the right hand.
- Do not operate vehicles within 100 feet of a helicopter with rotors in motion.



Runway Incursions




Runway incursion occurs when an aircraft, vehicle or person enters the protected area of a surface designated for the landing and take-off of aircraft without approval from Air Traffic Control Tower. The leading causes of these incidents result from a failure to follow procedures, inadequate vehicle operator training, and loss of situational awareness.



Airfield Markings/Signs

- Instrument Hold Position Sign
- Instrument Hold line (ILS)

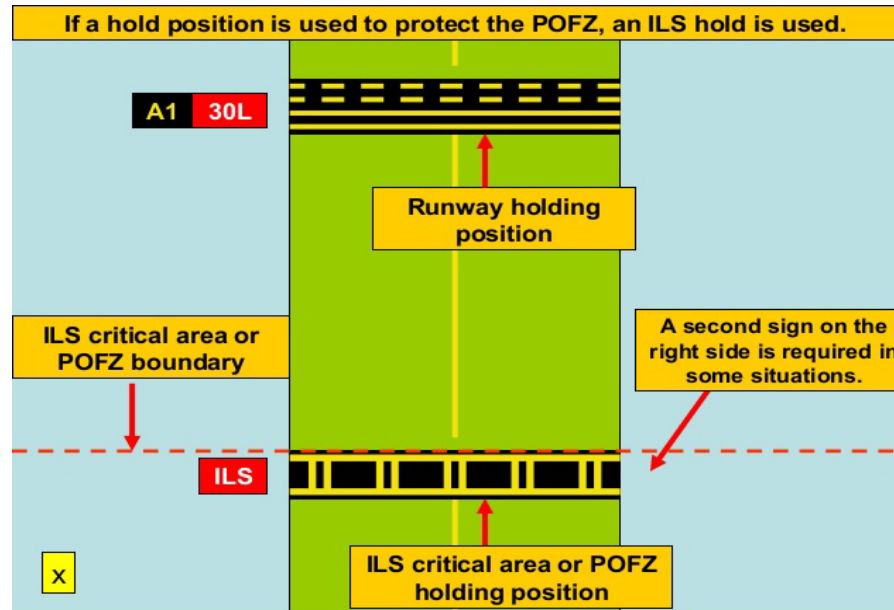

Red background with white letters "INST". These signs are located adjacent to all Runway Hold line markings. **NEVER GO PAST THESE SIGNS WITHOUT THE CONTROL TOWER APPROVAL WHEN INTERNALLY LIT AND/OR THE CONTROL TOWER HAS INSTRUCTED THAT PRECISION APPROACH CRITICAL AREA RESTRICTIONS ARE IN EFFECT.**


Two parallel yellow lines with multiple pairs of double vertical yellow stripes. The letters "INST" are co-located with this hold line. These lines are located on taxiway F & G and are used to identify/protect the runway instrument landing systems. **NEVER CROSS THESE LINES WITHOUT CONTROL TOWER APPROVAL.** CMA markings are co-located with the "INST" marking/sign.



CMA Defined



A CMA is an area of the airfield where specific permission from Air Traffic Control (ATC) is required for aircraft, vehicles, and personnel to enter or move within due to potential conflicts with aircraft operations.

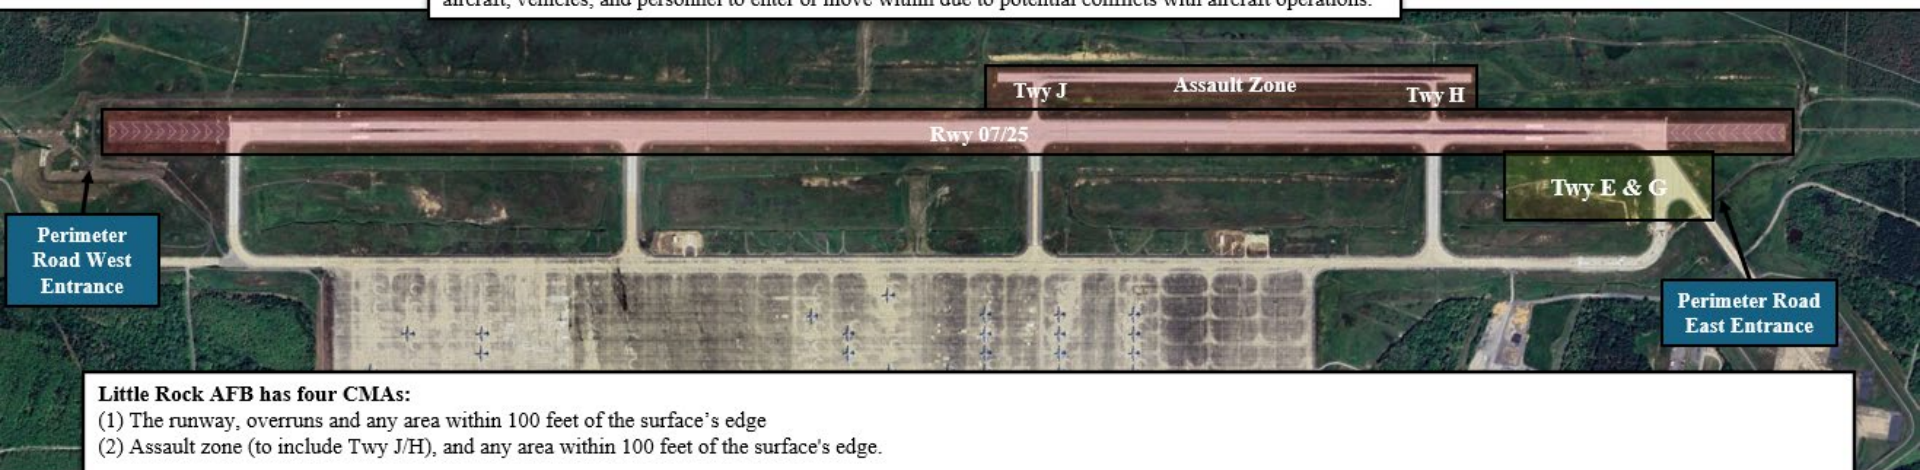

Little Rock AFB has four CMAs:

- (1) The runway, overruns and any area within 100 feet of the surface's edge
- (2) Assault zone (to include Twy J/H), and any area within 100 feet of the surface's edge.

Instrument Landing System (ILS) holding positions are considered a CMA.

- (3) Perimeter road adjacent to the overrun [a small portion intersects the localizer critical area]
- (4) Portions of Twy E/G (to include the grass infield) [glideslope critical area]



Airfield Markings



VFR Hold Line:

- Four parallel yellow stripes (two solid and two dashed) with a red mandatory sign and runway guard lights on either side of the taxiway mark the entrance to the runway/assault zone on each taxiway. **NEVER CROSS THESE LINES WITHOUT CONTROL TOWER APPROVAL.**





Airfield Markings



Instrument Hold Line:

- Two solid yellow lines, two feet apart, extending across the width of the taxiway connected by pairs of solid yellow lines ten feet apart, along with a red mandatory sign to the left of the taxiway, mark the boundaries of the ILS critical area on taxiways Golf and Echo. **NEVER CROSS THESE LINES WITHOUT CONTROL TOWER APPROVAL.**





Airfield Signs

- Taxiway Direction Sign
- Taxiway Location Sign



Taxiway direction signs have a **yellow background and black characters**, which identifies the designation or intersecting taxiways. Arrows indicate the direction of turn. Direction signs are normally located on the left side of the taxiway and prior to the intersection.

Taxiway location signs have a **black background and yellow characters**, which identifies the taxiway on which an aircraft or vehicle operator is located.



Airfield Markings

- Circle of Safety



The area surrounding the aircraft that vehicles may not normally penetrate. This area extends 10ft beyond the nose, tail, and wing of an of an aircraft. Green markings are segments that have been painted around the C-130 parking spots in the restricted area, which represents the circle of safety. Only essential vehicles may penetrate this circle.



Restricted Area



- Restricted Area Marking
- Entry Control Point (ECP)



A six inch wide red line around the C-130 parking apron used to delineate airfield restricted areas.
NEVER ENTER THESE AREAS UNLESS ESCORTED BY A AUTHORIZED INDIVIDUAL (RAB badge).



ECP markings are 6" wide by 3' long retroreflective white bars separated by 6" gaps. **ALL PERSONNEL ENTERING A RESTRICTED AREA MUST HAVE A VALID RESTRICTED AREA BADGE** (AF Form 1199) authorizing access into the area or be escorted.



Operating Within the CMA



- **NO VEHICLE OPERATOR OR PEDESTRIAN SHALL ENTER THE CMA WITHOUT SPECIFIC APPROVAL FROM ATC TOWER.**
- Vehicles must establish and maintain 2-way communication with the ATC Tower via the “Tower” net on a LMR prior to entering the CMA.

NOTE: It is prohibited from gaining approval to the CMA through a secondary agency. (Calling MOCC to call the ATC Tower to ask for permission)

- Vehicles operators on the CMA must use a distinct approved call signs coordinated by the Wing ADPM, 19 CS, and published in LRAFB I 13-213.
- Vehicles operators must use light emitting diode/rotating beacon lights and/or emergency/hazard warning flashers when driving in the CMA.



Tower Communication



- When operating vehicle on the airfield always maintain 2 way radio communication with tower at all times.
- When talking to tower use the following format: who your trying to contact, who you are, where you are, and state your intentions.
- Wait for the ATC tower to respond to your request. Read back their instructions verbatim, if you are unsure or the transmission was difficult to hear ask them to “say again”.
- When Talking to Tower over the LMR NEVER say the words “Clear”, “Cleared”, or “Clearance”.



Sample Tower Communication

VEHICLE OPERATOR:	" TOWER AIRFIELD ONE."
ATCT:	"AIRFIELD ONE, TOWER."
VEHICLE OPERATOR:	"TOWER, AIRFIELD ONE REQUEST TO CROSS (runway) AT (point/intersection)."
ATCT:	"AIRFIELD ONE, CROSS (runway) AT (point/intersection). or"
VEHICLE OPERATOR: Note: Airfield 1 visually scans the runway prior to entry, and then proceeds across the runway	"AIRFIELD ONE UNDERSTANDS APPROVED TO CROSS (runway) AT (point/intersection). WILL REPORT WHEN OFF."
VEHICLE OPERATOR:	"TOWER, AIRFIELD ONE CROSSING COMPLETE, OFF (runway) AT (location)."
ATCT:	"AIRFIELD ONE, ROGER."

Always read back instructions!



Sample Tower Communication

VEHICLE OPERATOR:	"TOWER, AIRFIELD ONE."
ATCT:	"AIRFIELD ONE, TOWER."
VEHICLE OPERATOR:	"TOWER, AIRFIELD ONE REQUEST TO CROSS (runway) AT (point/intersection)."
ATCT:	"AIRFIELD ONE, HOLD SHORT OF (runway)."
VEHICLE OPERATOR:	"AIRFIELD ONE, HOLDING SHORT OF (runway) AT (location)."
Note: Airfield 1 visually scans the runway prior to entry, and then proceeds across the runway	
VEHICLE OPERATOR:	"TOWER, AIRFIELD ONE HOLDING SHORT OF (runway) AT (location)."
ATCT:	"AIRFIELD ONE, ROGER."

If vehicle operators are issued hold short instructions, they are required read back the instructions verbatim.



Tower Communication

- Tower controls all aircraft, vehicle, and approved pedestrian traffic on the CMA by two-way radio communications or, in the event of lost communications, by light gun signals. If use of light gun signals is unsuccessful the ATC Tower will raise and lower the intensity of the white Runway edge lights. All vehicles and pedestrians MUST exit the CMA.

STEADY GREEN: CLEAR TO CROSS




STEADY RED: STOP



FLASHING RED: CLEAR THE TAXIWAY



FLASHING WHITE: RETURN TO STARTING POINT ON AIRPORT



ALTERNATING RED AND GREEN: EXERCISE EXTREME CAUTION





Phonetic Alphabet



A	ALFA	N	NOVEMBER
B	BRAVO	O	OSCAR
C	CHARLIE	P	PAPA
D	DELTA	Q	QUEBEC
E	ECHO	R	ROMEO
F	FOX-TROT	S	SIERRA
G	GOLF	T	TANGO
H	HOTEL	U	UNIFORM
I	INDIA	V	VICTOR
J	JULIET	W	WHISKEY
K	KILO	X	X-RAY
L	LIMA	Y	YANKEE
M	MIKE	Z	ZULU



Construction



When in the vicinity of a construction area stay clear of construction equipment (machines, vehicles, tools, etc.) Remain outside of the red and white barricades. If you notice any suspicious behavior or have any questions, please contact airfield operations.



FOD Control/Prevention



- FOD checks are **EVERYONES** responsibility!
- Always ensure vehicle and tires are free of FOD before entering the airfield pavement or any airfield areas.
- Make sure all vehicles have a FOD can.
- Make sure all equipment inside and outside of vehicle is safely secured and tied down before entering the airfield area.



Nighttime operation



- Vehicles operators must use light emitting diode/rotating beacon lights and/or emergency/hazard warning flashers when driving in the CMA.
- When approaching an aircraft at night, turn off the vehicle headlights and turn on the emergency flashers. Face the vehicle away from the aircraft.



BLACK KNIGHTS




Airfield Lighting



- RUNWAY EDGE LIGHTS: WHITE

WHITE LIGHTS ARE USED TO IDENTIFY
THE LATERAL LIMITS OF THE RUNWAY

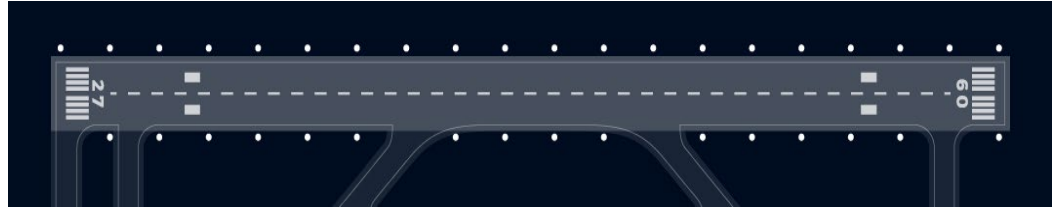

- TAXIWAY EDGE LIGHT: BLUE

BLUE LIGHTS ARE USED TO DEFINE THE WIDTH OF TAXIWAYS




- OBSTRUCTION LIGHTS: RED

SINGLE OR DOUBLE RED LIGHTS ARE USED TO IDENTIFY AIRFIELD OBSTRUCTIONS
SUCH AS BUILDINGS AND EQUIPMENT IN CLOSE PROXIMITY TO AIRCRAFT.





Airfield Diagram

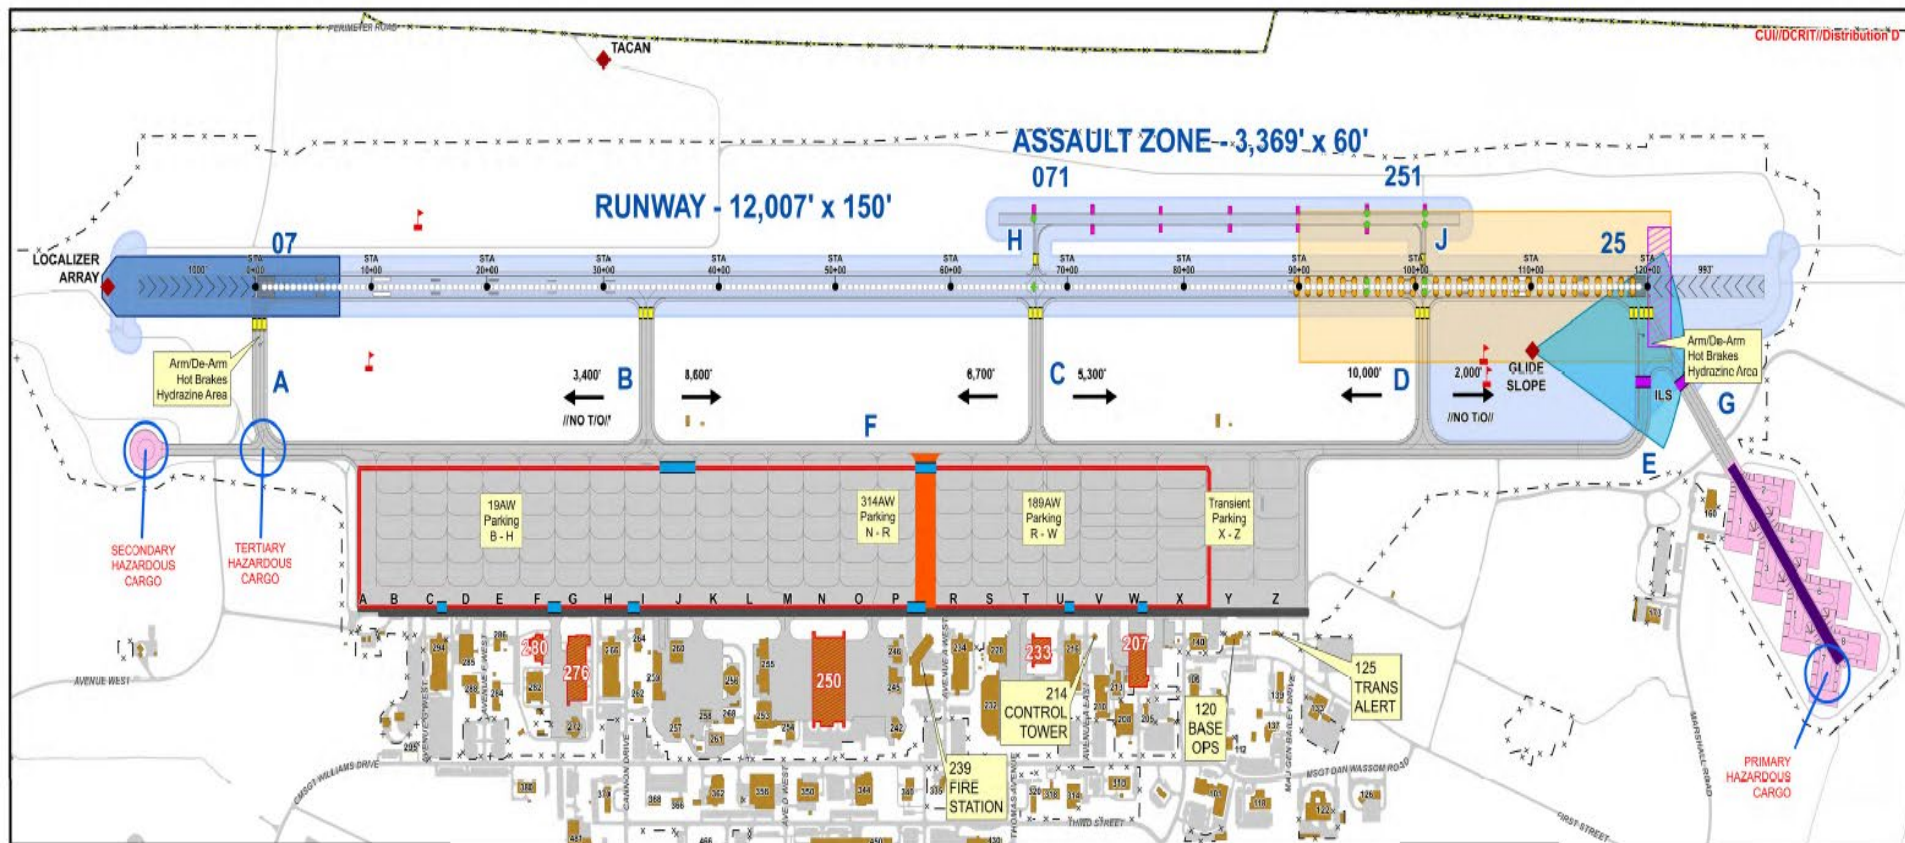

BLACK KNIGHTS

19th Airlift Wing



Contact your Unit Airfield Driving Program Managers with any questions.

Airfield Management: 501-987-6123/DSN: 731-6123

OPR: 19 OSS/OSAA

IAW: AFI 13-213

BLACK KNIGHTS