

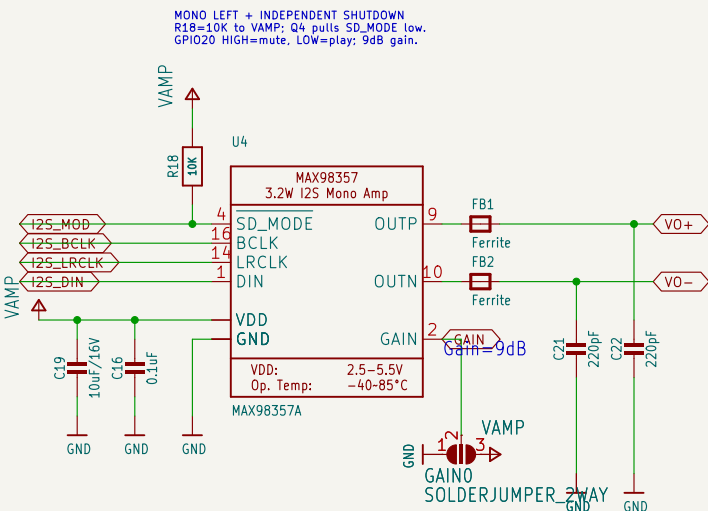
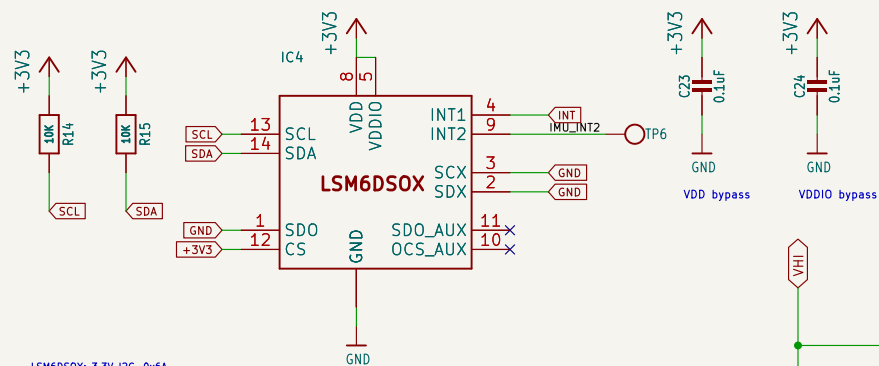
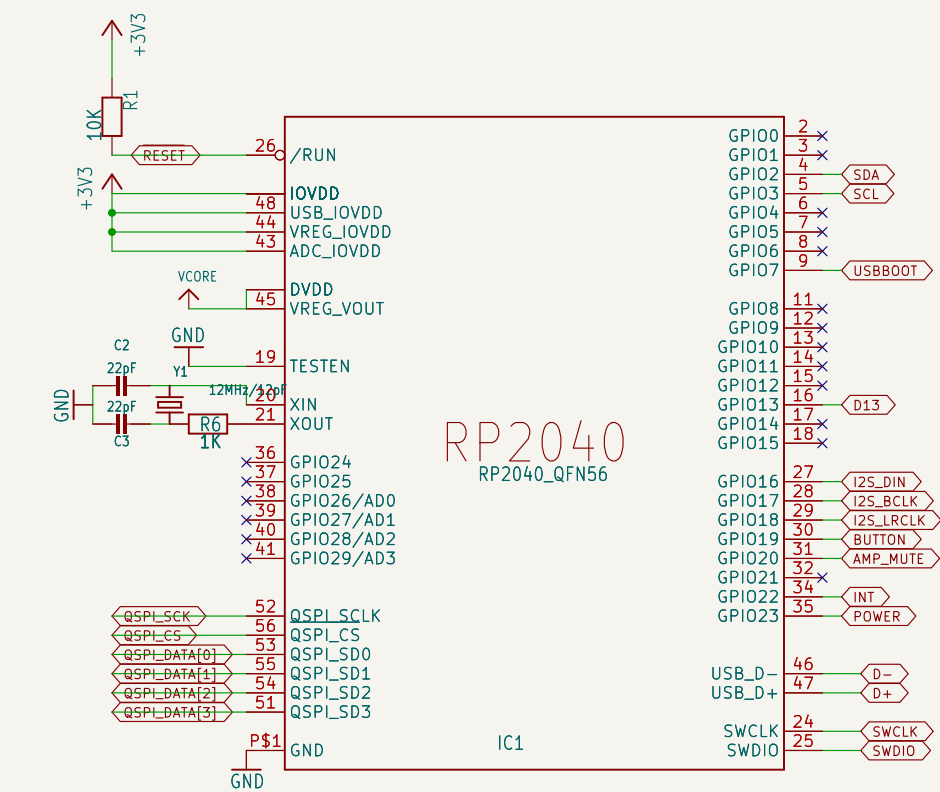
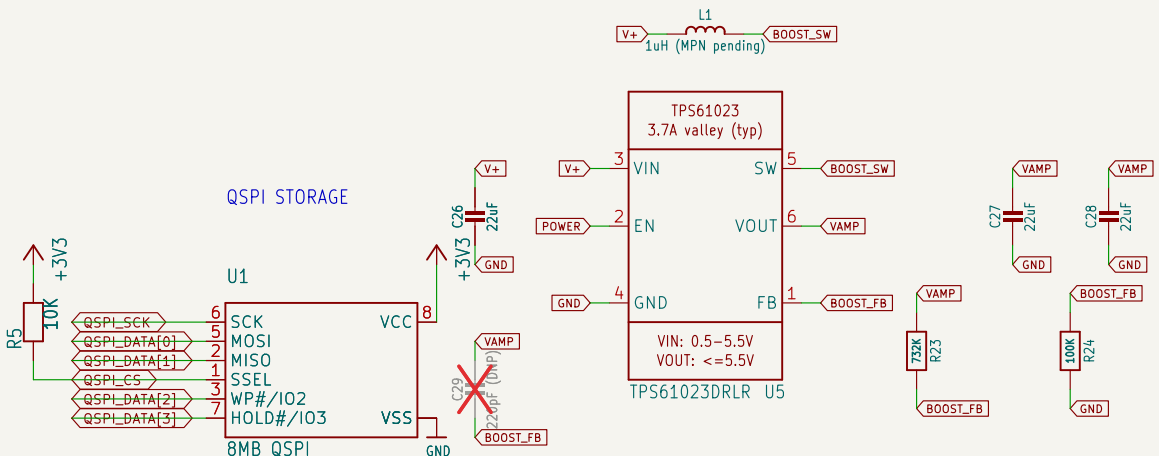
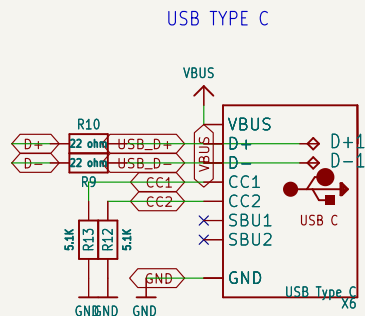



STATUS LED (GPIO13)

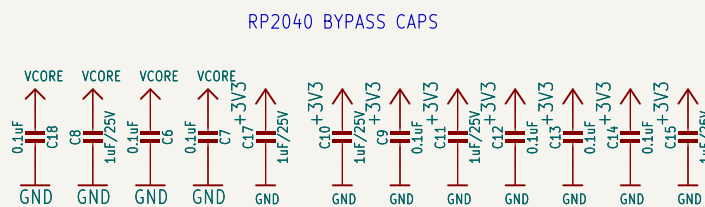

POWER DECLARATIONS (not fitted parts)
USB / return / mux / cell / switched input

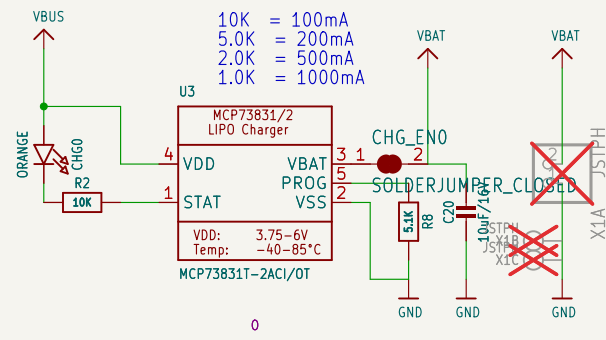

0.2 ELECTRICAL / PLACEMENT DRAFT – NOT FOR FABRICATION
Cell, charge/temperature/cutoff policy and exact power MPNs unresolved.
BTL speaker outputs: neither lead is ground. No hardware qualification.

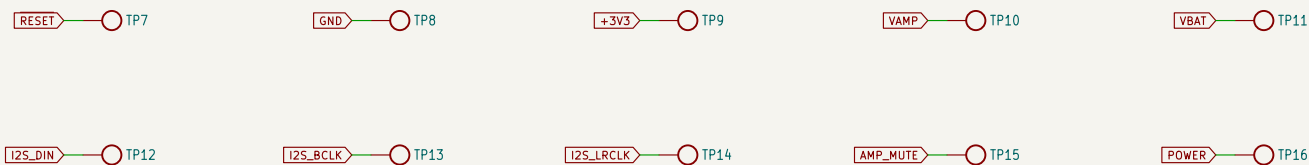

5V-CLASS AUDIO BOOST (Adafruit 4654-derived)
EN follows GPIO23 POWER; existing R17 supplies default pulldown.
R1 default-on pull-up omitted. Input remains behind Q1/Q2.
Power MPNs / effective capacitance not frozen.
C29: optional feed-forward; resolve for >40uF effective Cout.

MONO LEFT + INDEPENDENT SHUTDOWN
R18=10K to VAMP; Q4 pulls SD_MODE low
GPIO20 HIGH=mute, LOW=play; 9dB gain.

SPEAKER: isolated BTL pair, 4 ohm target
3W high-end != qualified continuous speaker power.
Molex Pico-Lock, not battery JST-PH or button JST-SH.

Q4 / GPIO20: HIGH = SHUTDOWN
4.7K pull-up dominates RP2040 reset pulldown.
Drive mute HIGH before enabling POWER.
Supply collapse/pop behavior remains a bench gate.

Not an Adafruit product. Not for fabrication or child use.
Limor Fried / Ladyada and Bryan Siepert for Adafruit Industries; modifications: dcuccia.
Adapted from Adafruit 5768 / 4438 / 4654; CC BY-SA 3.0. See [ATTRIBUTION.md](#).

Sheet: /
File: handbell.kicad_sch

Title: Handbell wing placement – battery interface NOT FROZEN

Size: User	Date: 2026-09-07
------------	------------------

KiCad E.D.A. 10.0.6	Id: 1/1
---------------------	---------

100