


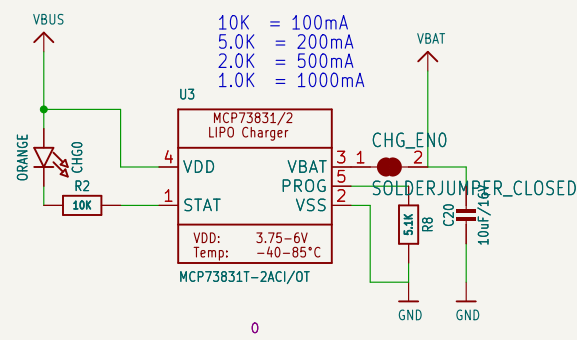
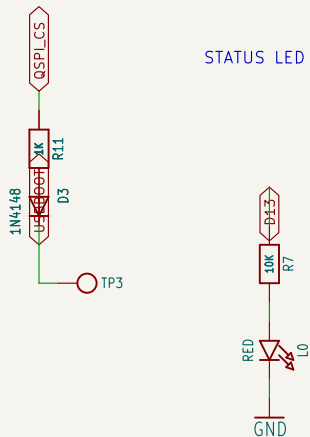
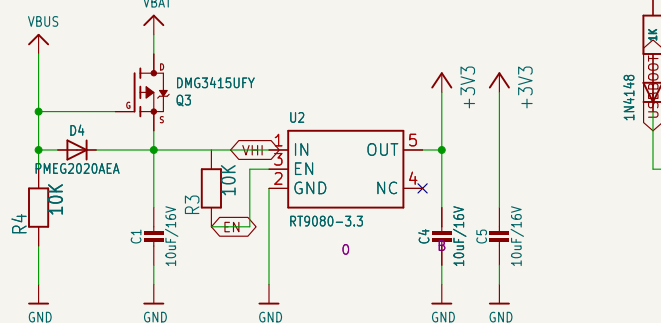



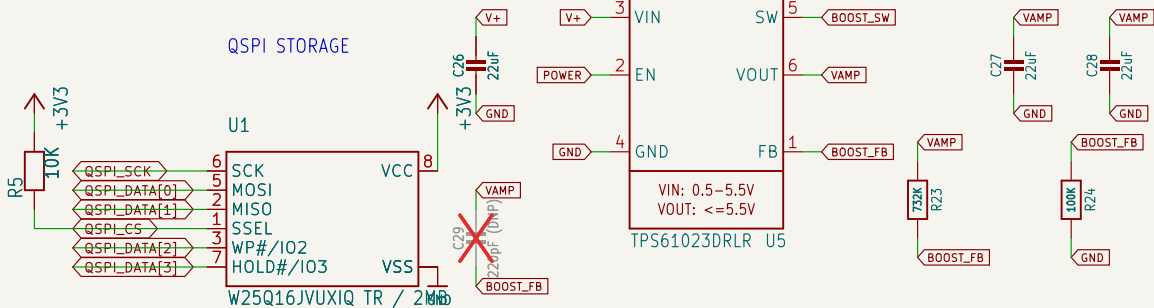
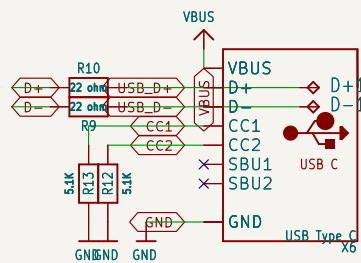
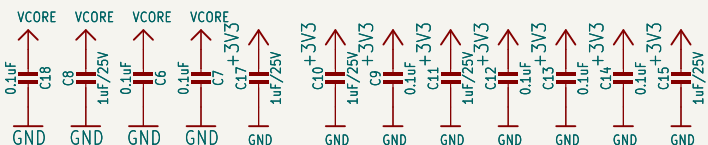






L1
V+ 1uH (MPN pending) BOOST_SW








0.2 ELECTRICAL / PLACEMENT DRAFT - NOT FOR FABRICATION
Cell, charge/temperature/cutoff policy and exact power MPNs unresolved.
BTL speaker outputs: neither lead is ground. No hardware qualification.



BQ29700 + common-drain dual N-FET + 33mR series sense: all charge/load return crosses cutoff.

No parallel JST battery inlet. BT1/BT2 are identical Keystone254revC SMT contacts.



Internal body diodes: S1(CELL_NEG) -> common D <- S2(PROT_FET_RETURN).

DOUT drives G1: blocks discharge return, COUT drives G2: blocks charge return.

NO LIVE CELL: reverse insertion, cell-temperature charging and charge-profile gates OPEN.

R8 stays 5.1k (~196mA; AC termination~14.7mA). NOT a complete BMS or safety approval.

Not an Adafruit product. Not for fabrication or child use.
 Limor Fried / Ladyada and Bryan Siepert for Adafruit Industries; modifications: dcuccia.
 Adapted from Adafruit 5768 / 4438 / 4654; CC BY-SA 3.0. See [ATTRIBUTION.md](#).
dcuccia - independent project

Sheet: /
File: handbell.kicad_sch

Title: T8 protected contact draft – NOT FOR LIVE CELL / FABRICATION

Size: User	Date: 2026-09-11
------------	------------------

Size: User	Date: 2020-09-11	Rev: 0.4-to-draft
KiCad E.D.A. 10.0.6		Id: 1/1

RIGGS E.D.A. 10.0.0		IG. 17.1	
7	8		