
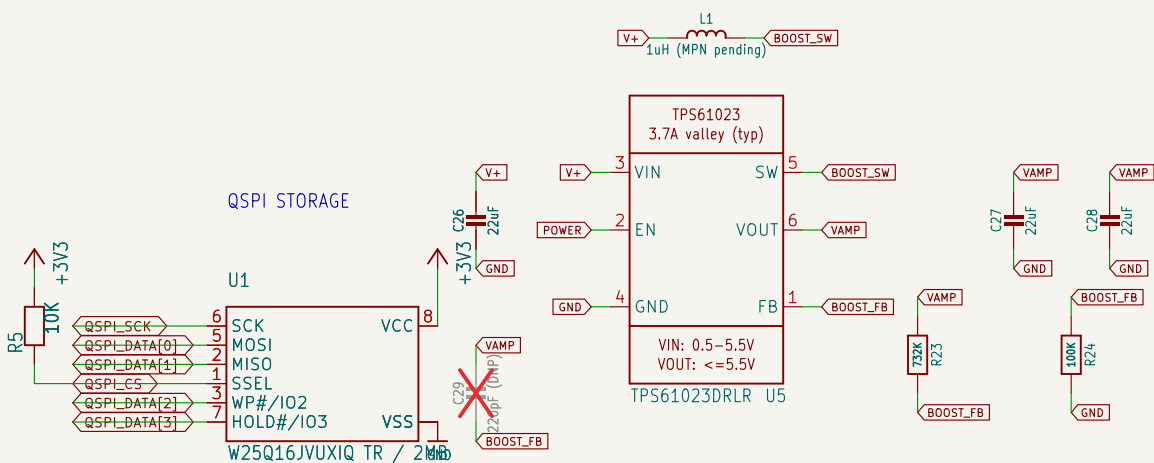
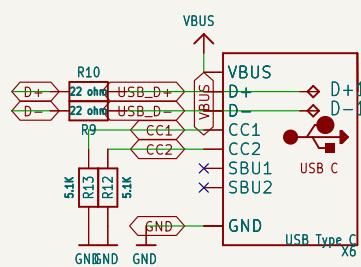
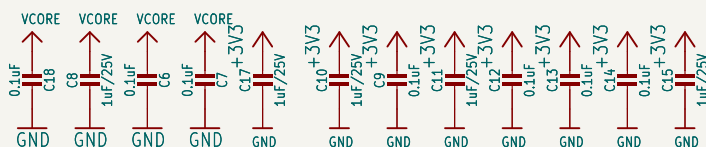
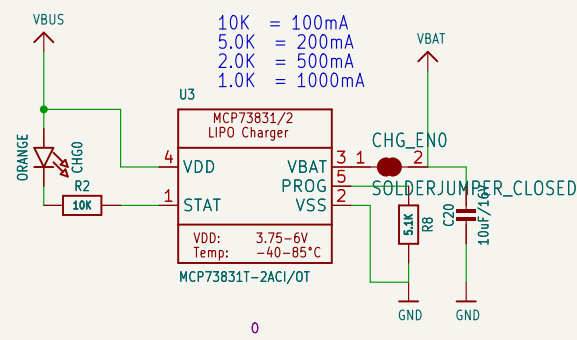
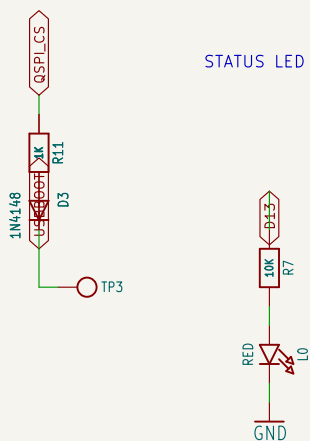
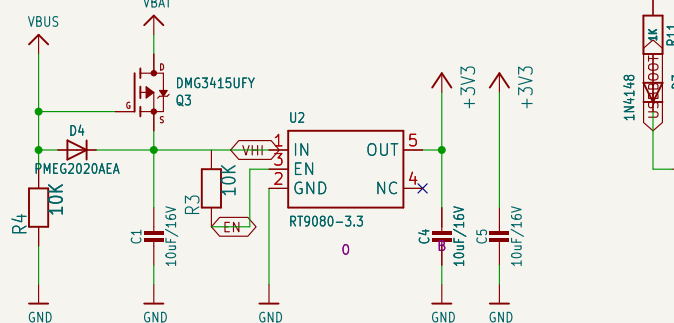






No parallel JST battery inlet. BT1/BT2 are identical Keystone254revC SMT contacts.



DOUT drives G1: blocks discharge return, COUT drives G2: blocks charge return.

R8 stays 5.1k (~196mA; AC termination~14.7mA). NOT a complete BMS or safety approval.

dcuccia – independent project

Title: T8 protected contact draft – NOT FOR LIVE CELL / FABRICATION

Size: User	Date: 2020-09-11	REV: 0.4-18-01a1
KiCad E.D.A. 10.0.6		Id: 1/1

RICGG E.D.A. 10.0.0	10. 1/ 1
---------------------	----------