


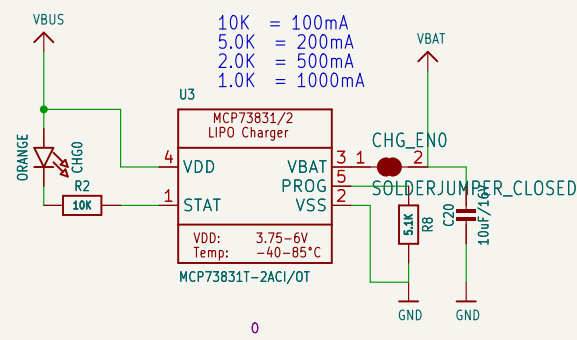
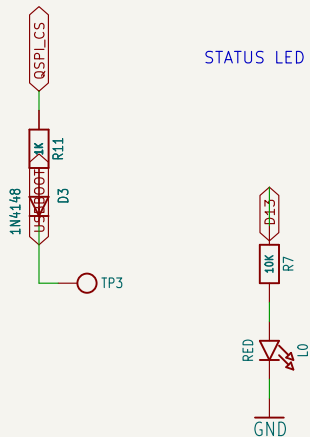
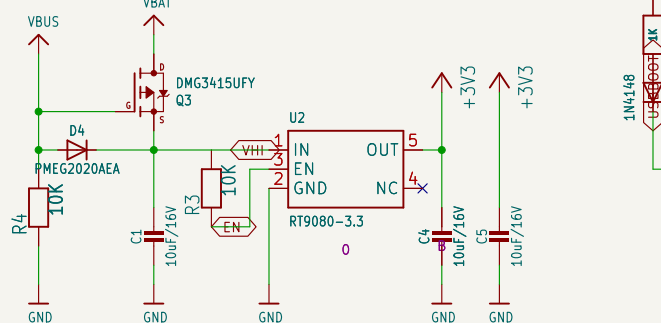



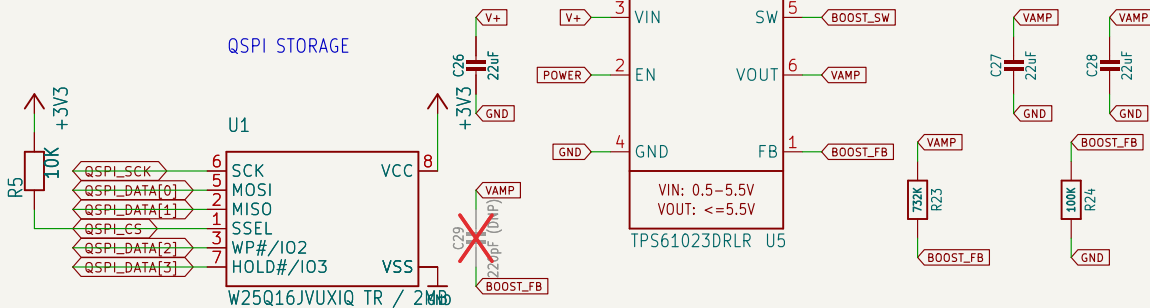


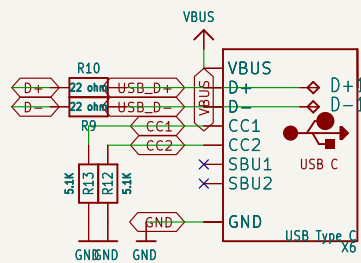

L1
V+ 1uH (MPN pending) BOOST_SW



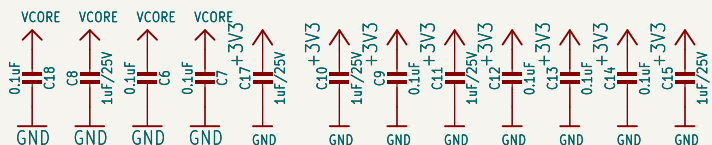


0.2 ELECTRICAL / PLACEMENT DRAFT - NOT FOR FABRICATION
Cell, charge/temperature/cutoff policy and exact power MPNs unresolved.
BTL speaker outputs: neither lead is ground. No hardware qualification.



BQ29700 + common-drain dual N-FET + 33mR series sense: all charge/load return crosses cutoff.

No parallel JST battery inlet. BT1/BT2 are identical Keystone254revC SMT contacts.



DOUT drives G1: blocks discharge return, COUT drives G2: blocks charge return.

R8 stays 5.1k (~196mA; AC termination~14.7mA). NOT a complete BMS or safety approval.

Sheet: /
File: handbell.kicad_sch

Size: User	Date: 2026-09-11	Rev: 0.4-t8-draft
------------	------------------	-------------------

Size: User	Date: 2026-09-11	Rev: 0.4-to-draft
KiCad E.D.A. 10.0.6		Id: 1/1