
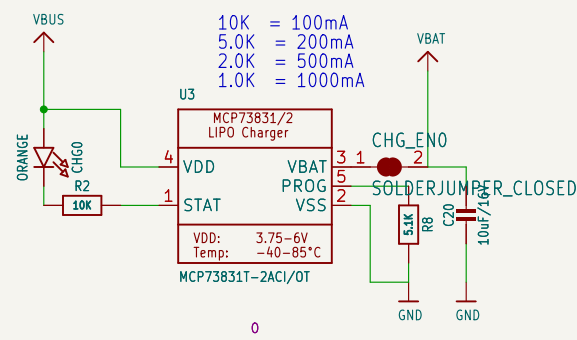
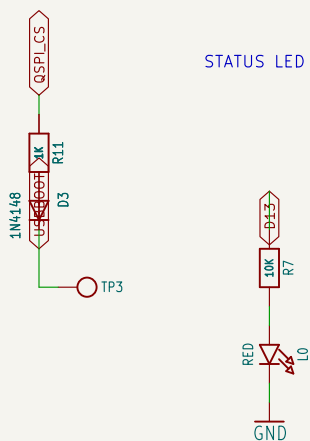
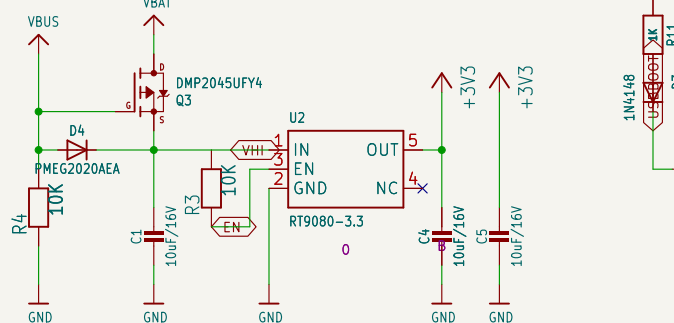





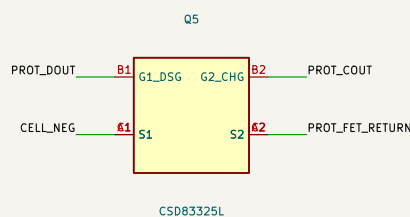
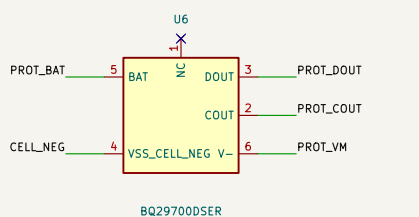


No parallel JST battery inlet. BT1/BT2 are identical Keystone254revC SMT contacts.



DOUT drives G1: blocks discharge return, COUT drives G2: blocks charge return.

R8 stays 5.1k (~196mA; AC termination~14.7mA). NOT a complete BMS or safety approval.

Sheet: /
File: handbell.kicad.sch

Size: User	Date: 2026-09-11	Rev: 0.4-t8-draft
------------	------------------	-------------------

7	8
---	---