

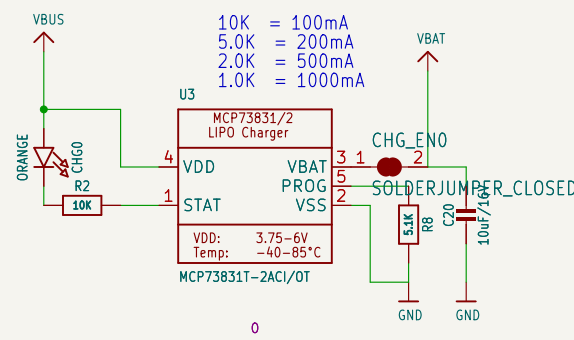
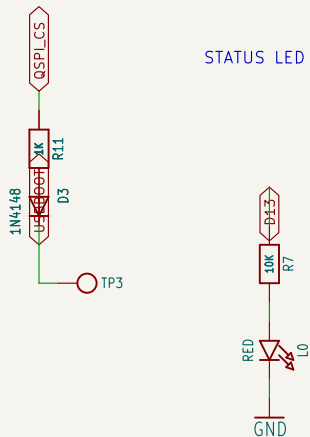
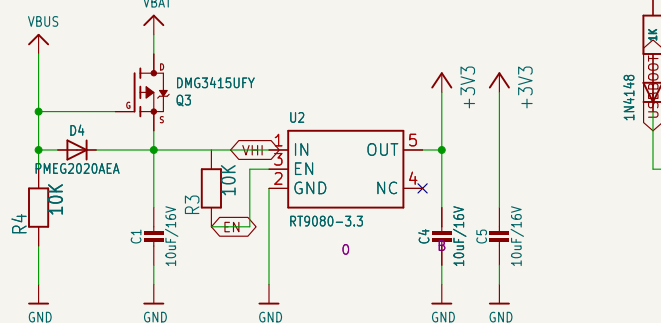



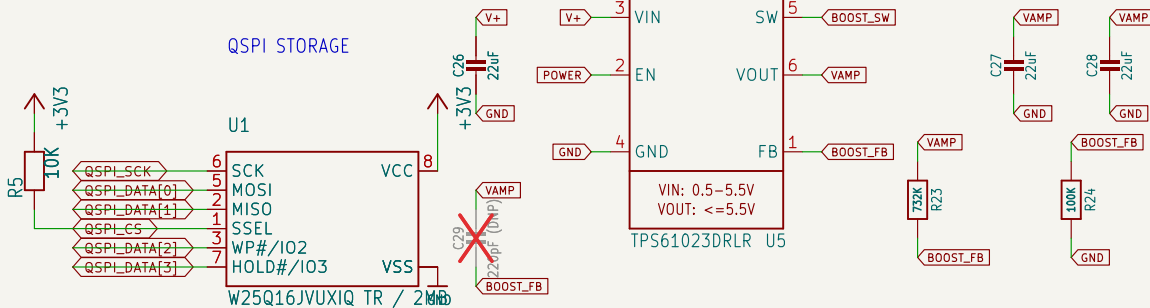


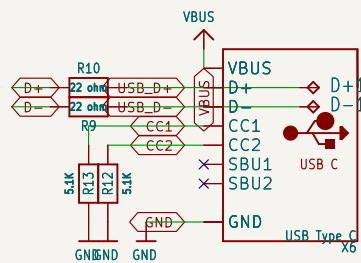


**L1**  
V+ — 1uH (MPN pending) — BOOST\_SW


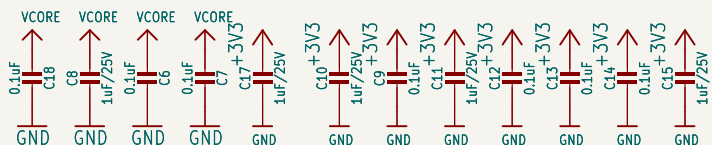


GPIO19 BUTTON HARNESS  
J2 -> 1K -> GPIO; 10K pull-up, 10nF filter.  
Firmware debounce + final cable/ESD review required.

SERVICE PADS: no fitted headers; route to accessible edge/fixture.  
BOOT=TP3; RESET=TP7; SWCLK=TP4; SWDIO=TP5.



No parallel JST battery inlet. BT1/BT2 are identical Keystone254revC SMT contacts.



DOUT drives G1: blocks discharge return. COUT drives G2: blocks charge return.

R8 stays 5.1k (~196mA; AC termination~14.7mA). NOT a complete BMS or safety approval.

Sheet: /  
File: handbell.kicad\_sch

|            |                  |                   |
|------------|------------------|-------------------|
| Size: User | Date: 2026-09-11 | Rev: 0.4-t8-draft |
|------------|------------------|-------------------|

|                     |                  |                   |
|---------------------|------------------|-------------------|
| Size: User          | Date: 2026-09-11 | Rev: 0.4-to-draft |
| KiCad E.D.A. 10.0.6 |                  | Id: 1/1           |