LG.PHILIPS LCD

Product Specification

SPECIFICATION
FOR
APPROVAL

(∨) **Preliminary Specification**

(   ) **Final Specification**

Title	14.1" WXGA+ TFT LCD

Customer	
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.
*MODEL	LP141WP1
Suffix	TLB3

*When you obtain standard approval,
 please use the above model name without suffix

SIGNATURE	DATE
/	
/	
/	

Please return 1 copy for your confirmation with your signature and comments.

SIGNATURE	DATE
J.H. Lee / G.Manager	
REVIEWED BY	
J.H. Park / Manager	
PREPARED BY	
C.I.Kim / Engineer	
S.H.LEE / Engineer	

Products Engineering Dept.
LG. Philips LCD Co., Ltd

Contents

Product Specification

RECORD OF REVISIONS

Revision No	Revision Date	Page	Description	EDID ver
0.0	Sep. 23, 2005	-	First Draft	V0.0

## 1. General Description

The LP141WP1 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.1 inches diagonally measured active display area with WXGA+ resolution(900 vertical by 1440 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP141WP1 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP141WP1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141WP1 characteristics provide an excellent flat display for office automation products such as Notebook PC.
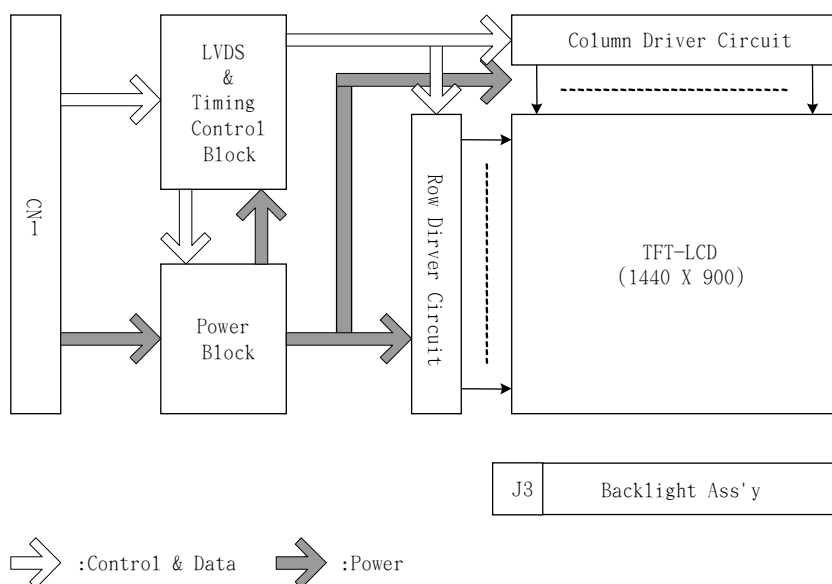
General Features

|	
Active Screen Size	14.1 inches diagonal
Outline Dimension	320 (H) × 206(V) × 5.5(D, max) mm
Pixel Pitch	0.2109 mm × 0.2109 mm
Pixel Format	1440 horiz. By 900 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	220 cd/m^2(Typ.5 point)
Power Consumption	Total 6.0 Watt(Typ.) @ LCM circuit 1.9Watt(Typ.), B/L input 4.1Watt(Typ.)
Weight	435 g (Max.), 425g(Typ.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Glare treatment of the front polarizer
RoHS Comply	Yes

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
　　　　Wet bulb temperature should be 39°C Max, and no condensation of water.
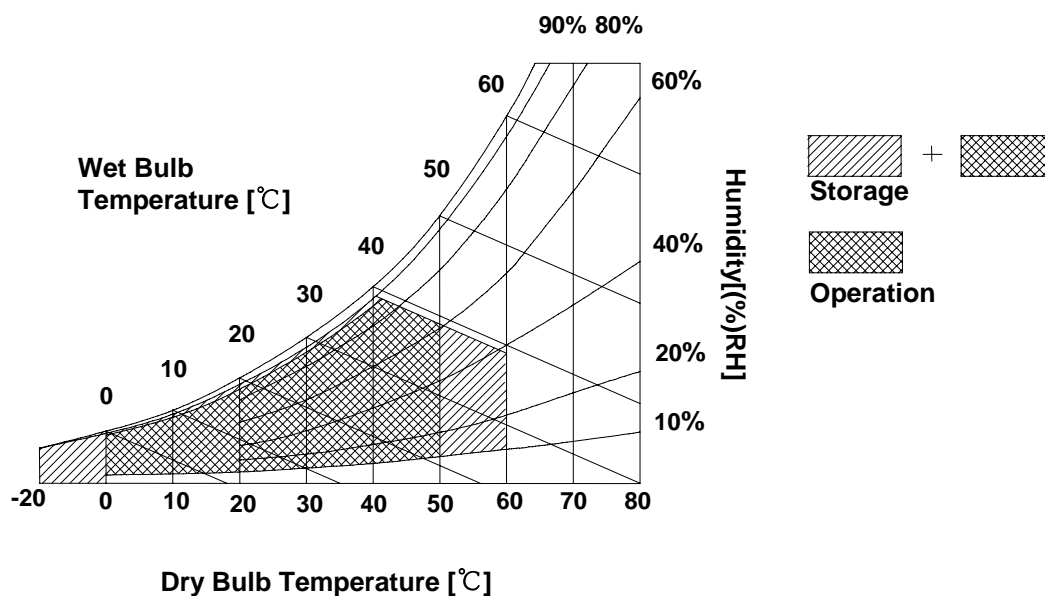
3. Electrical Specifications

3-1. Electrical Characteristics

The LP141WP1 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values Min	Values Typ	Values Max	Unit	Notes
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V_{DC}	
Power Supply Input Current	I_{CC}	−	560	645	Ma	1
Power Consumption	Pc	-	1.9	2.2	Watt	1
Differential Impedance	Zm	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V_{BL}	640(TBD)	675(6.0mA)	880(2.0mA)	V_{RMS}	
Operating Current	I_{BL}	2.0	6.0	7.0	mA_{RMS}	3
Power Consumption	P_{BL}	-	4.1	4.5		
Operating Frequency	f_{BL}	50	65	80	kHz	
Discharge Stabilization Time	Ts	-	-	3	Min	4
Life Time		15,000	-	-	Hrs	5
Established Starting Voltage at 25℃ at 0 ℃	Vs			1180 1415	V_{RMS} V_{RMS}	

Note)
1. The specified current and power consumption are under the Vcc = 3.3V , 25℃, fv = 60Hz condition whereas full black pattern is displayed and fv is the frame frequency.
2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
3. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics.
4. Define the brightness of the lamp after being lighted for 5 minutes as 100%, Ts is the time required for the brightness of the center of the lamp to be not less than 95%.
5. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.
6. The output of the inverter must have symmetrical(negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave.
   Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
7. It is defined the brightness of the lamp after being lighted for 5 minutes as 100%.
   T_S is the time required for the brightness of the center of the lamp to be not less than 95%.
8. The lamp power consumption shown above does not include loss of external inverter.
   The applied lamp current is a typical one.

Product Specification

Note)
9. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.
It shall help increase the lamp lifetime and reduce leakage current.
a. The asymmetry rate of the inverter waveform should be less than 10%.
b. The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.
* Inverter output waveform had better be more similar to ideal sine wave.

I_p

I_{-p}
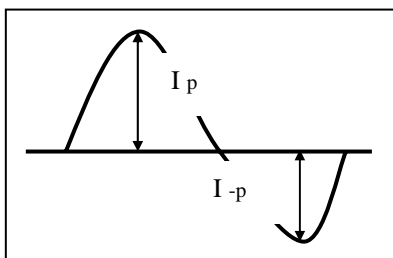
* Asymmetry rate:

$|I_p - I_{-p}| / I_{rms} * 100\%$

* Distortion rate

I_p (or I_{-p}) / I_{rms}

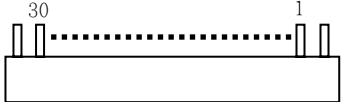※ Do not attach a conducting tape to lamp connecting wire.
If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.

3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.
 The electronics interface connector is a model GT101-30S-HR11 manufactured by LGC.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	GND	Ground	
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	
4	V EEDID	DDC 3.3V power	
5	BIST	Requested for LCD supplier test point	
6	Clk EEDID	DDC Clock	1, Interface chips
7	DATA EEDID	DDC Data	1.1 LCD : DAWIN, DTML012 (LCD Controller)
8	RA1-	Negative LVDS differential data input, R0-R5, G0	including LVDS Receiver
9	RA1+	Positive LVDS differential data input, R0-R5, G0	(DAWIN社, LVD4107x 2each)
10	GND	Ground	1.2 System : it must include international
11	RB1-	Negative LVDS differential data input, G1-G5, B0-B1	standard LVDS Transmitter.
12	RB1+	Positive LVDS differential data input, G1-G5, B0-B1	* Pin to Pin compatible with LVDS
13	GND	Ground	
14	RC1-	Negative LVDS differential data input, B2-B5, HS/VS/DE	2. Connector
15	RC1+	Positive LVDS differential data input, B2-B5, HS/VS/DE	2.1 LCD : GT101-30S-HR11, LGC or
16	GND	Ground	its compatibles
17	RCLK1-	Negative LVDS differential clock input	2.2 Mating : FI-X30M or equivalent.
18	RCLK1+	Positive LVDS differential clock input	2.3 Connector pin arrangement
19	GND	Ground	
20	RA2-	Negative LVDS differential data input, R0-R5, G0	
21	RA2+	Positive LVDS differential data input, R0-R5, G0	
22	GND	Ground	
23	RB2-	Negative LVDS differential data input, G1-G5, B0-B1	
24	RB2+	Positive LVDS differential data input, G1-G5, B0-B1	[LCD Module Rear View]
25	GND	Ground	
26	RC2-	Negative LVDS differential data input, B2-B5, HS/VS/DE	
27	RC2+	Positive LVDS differential data input, B2-B5, HS/VS/DE	
28	GND	Ground	
29	RCLK2-	Negative LVDS differential clock input	
30	RCLK2+	Positive LVDS differential clock input	

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or Compatible.
The mating connector part number is SM02B-BHSS-1 or equivalent.

Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored pink and the low voltage side terminal is Green.

3-3. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

Table 6. TIMING TABLE

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	87.2	88.75	90.8	MHz	
Hsync	Period	Thp	1576	1600	1624		
	Width	t_{WH}	24	32	40	tCLK	
	Width-Active	t_{WHA}	1440	1440	1440		
Vsync	Period	t_{VP}	922	926	932		
	Width	t_{WV}	4	6	8	tHP	
	Width-Active	t_{WVA}	900	900	900		
Data Enable	Horizontal back porch	t_{HBP}	72	80	88	tCLK	
	Horizontal front porch	t_{HFP}	40	48	56		
	Vertical back porch	t_{VBP}	15	17	19	tHP	
	Vertical front porch	t_{VFP}	3	3	5		

3-4. Signal Timing Waveforms

Condition : VCC =3.3V

Data Enable, Hsync, Vsync

High: 0.7VCC
Low: 0.3VCC
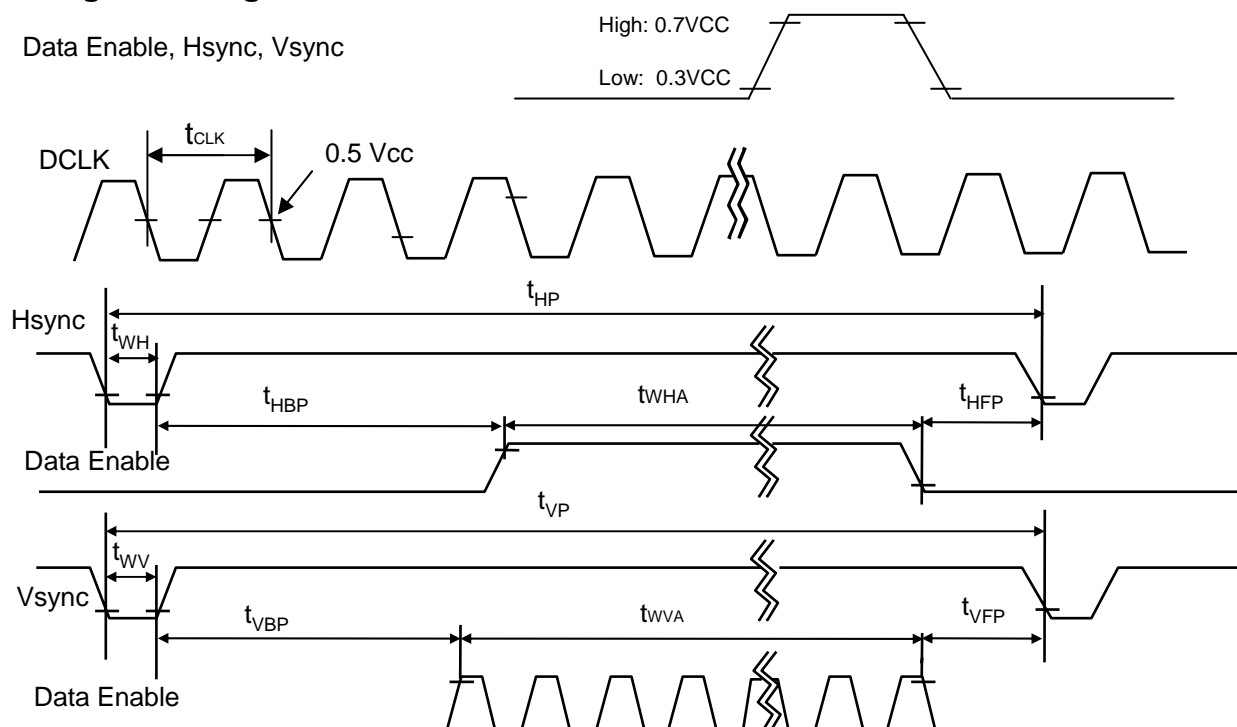
3-5. Color Input Data Reference

The brightness of each primary color (red,green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

Color		Input Color Data																		
		RED						GREEN						BLUE					
		MSB					LSB	MSB					LSB	MSB					LSB
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	…			…						…						…			
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...			…						…						…			
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	…			…						…						…			
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
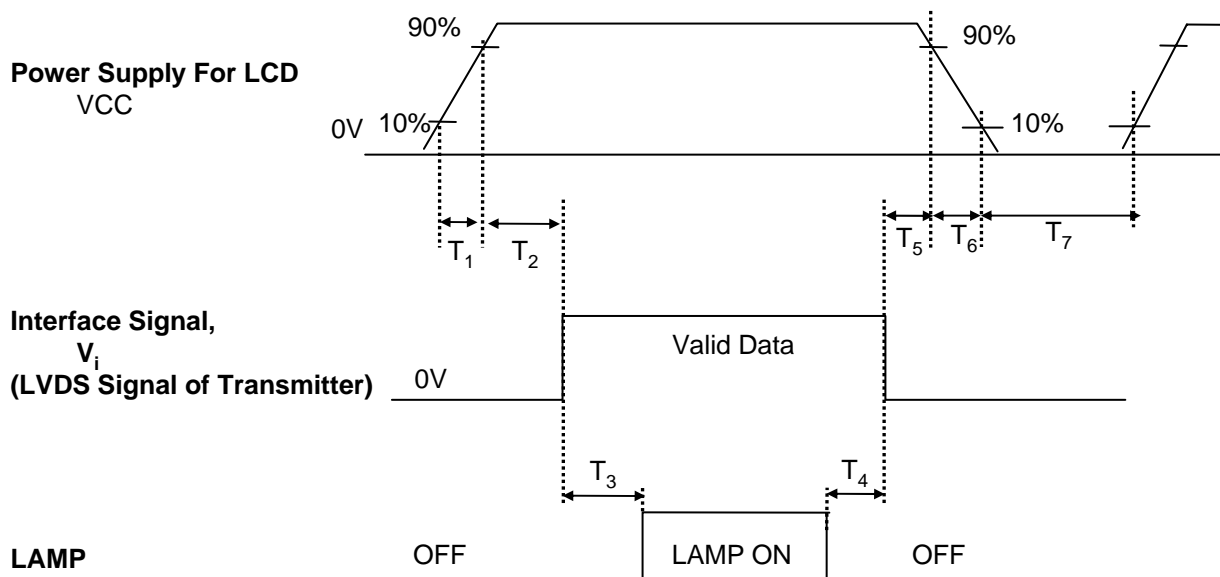
3-6. Power Sequence

Table 8. POWER SEQUENCE TABLE

Parameter	Value			Units
	Min.	Typ.	Max.	
T_1	-	-	10	(ms)
T_2	0	-	50	(ms)
T_3	200	-	-	(ms)
T_4	200	-	-	(ms)
T_5	0	-	50	(ms)
T_6	-	-	10	(ms)
T_7	400	-	-	(ms)

Note)
1. Please avoid floating state of interface signal at invalid period.
2. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
3. Lamp power must be turn on after power supply for LCD and interface signal are valid.

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.
FIG. 1 presents additional information concerning the measurement equipment and method.

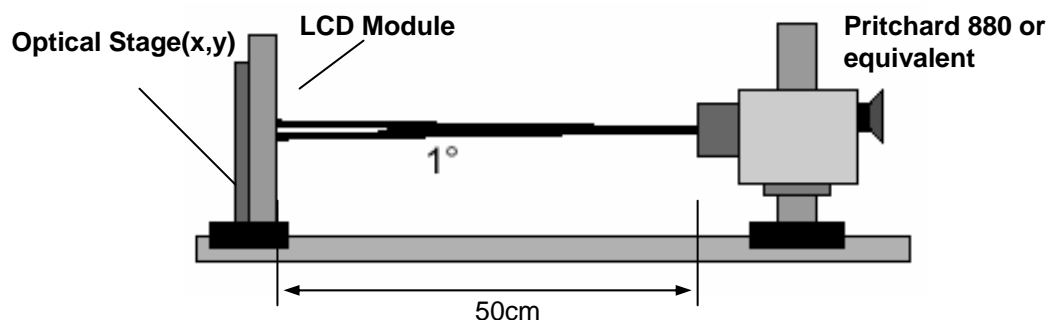### FIG. 1 Optical Characteristic Measurement Equipment and Method

Optical Stage(x,y)   **LCD Module**   **Pritchard 880 or equivalent**

1°

50cm

Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fᵥ=60Hz, f_{CLK}= 88.75MHz, I_{BL}= 6.0mA

Parameter		Symbol	Values			Units	Notes
			Min	Typ	MAx		
Contrast Ratio		CR	300	-	-		1
Surface Luminance, white		L_{WH}	185	220	-	cd/m²	2
Luminance Variation		δ_{WHITE}	-	1.85	2.0		3
Response Time							4
	Rise Time	Tr_R	-	10	15	ms	
	Delay Time	Tr_D	-	20	25	ms	
Color Coordinates							
	RED	RX	0.558	0.588	0.618		
		RY	0.316	0.346	0.376		
	GREEN	GX	0.298	0.328	0.358		
		GY	0.519	0.549	0.579		
	BLUE	BX	0.127	0.157	0.187		
		BY	0.112	0.142	0.172		
	WHITE	WX	0.283	0.313	0.343		
		WY	0.299	0.329	0.359		
Viewing Angle							5
	x axis, right(Φ=0°)	Θr	40	-	-	degree	
	x axis, left (Φ=180°)	Θl	40	-	-	degree	
	y axis, up (Φ=90°)	Θu	15	-	-	degree	
	y axis, down (Φ=270°)	Θd	30	-	-	degree	
Gray Scale							6

Product Specification

Note)
1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \ldots L_5)$$

3. The variation in surface luminance , The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula.
   For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \ldots L_{13})}{\text{Minimum}(L_1, L_2, \ldots L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are   determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification   * f_V = 60Hz

Gray Level	Luminance [%] (Typ)
L0	0.17
L7	0.67
L15	4.17
L23	11.89
L31	23.57
L39	39.2
L47	58.9
L55	80.5
L63	100

FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

H,V : ACTIVE AREA
A : H/4 mm
B : V/4 mm
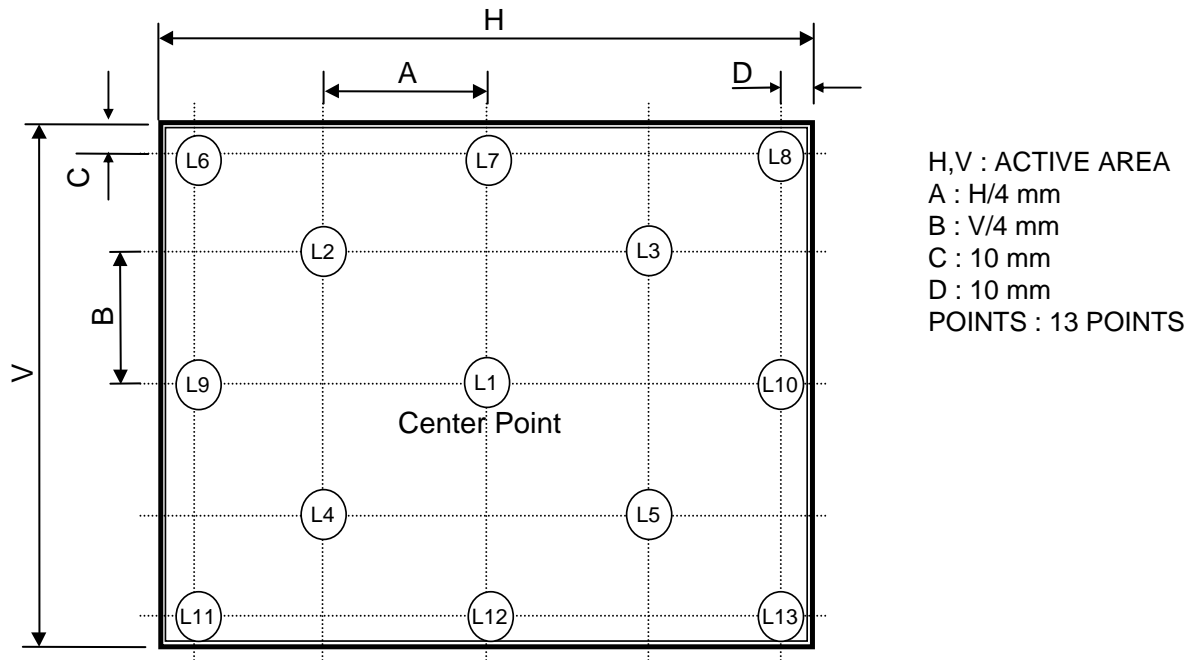C : 10 mm
D : 10 mm
POINTS : 13 POINTS

FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".
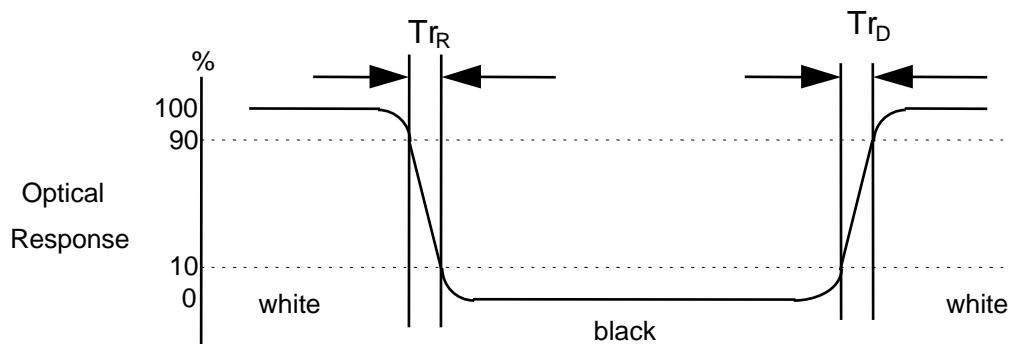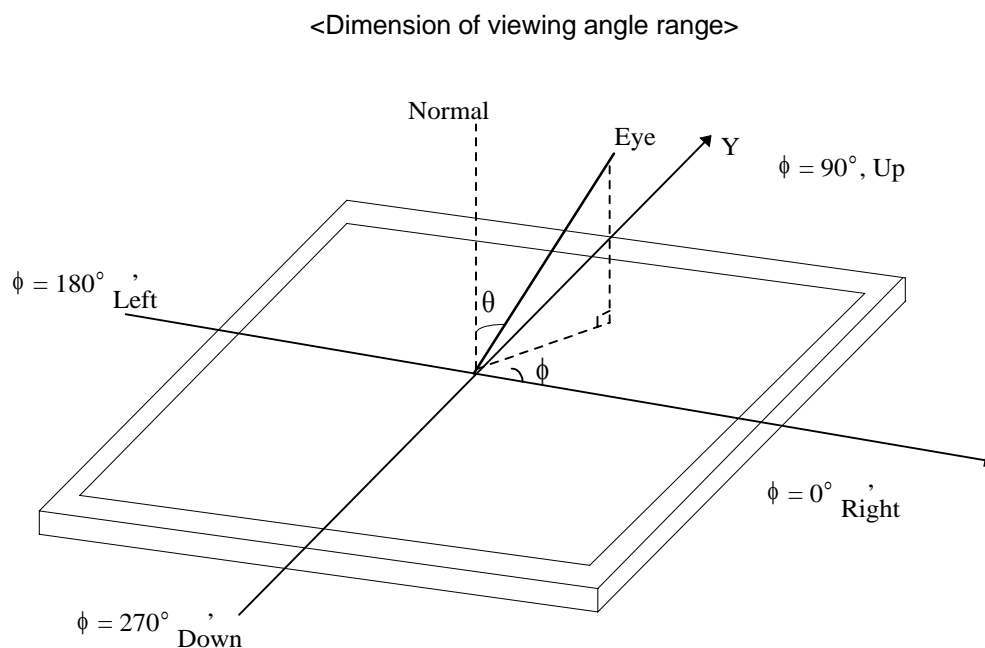
FIG. 4 Viewing angle

<Dimension of viewing angle range>

Normal

Eye Y

$\phi = 90°$, Up

$\phi = 180°$ 'Left

θ

φ

$\phi = 0°$ 'Right

$\phi = 270°$ 'Down

LG.PHILIPS LCD

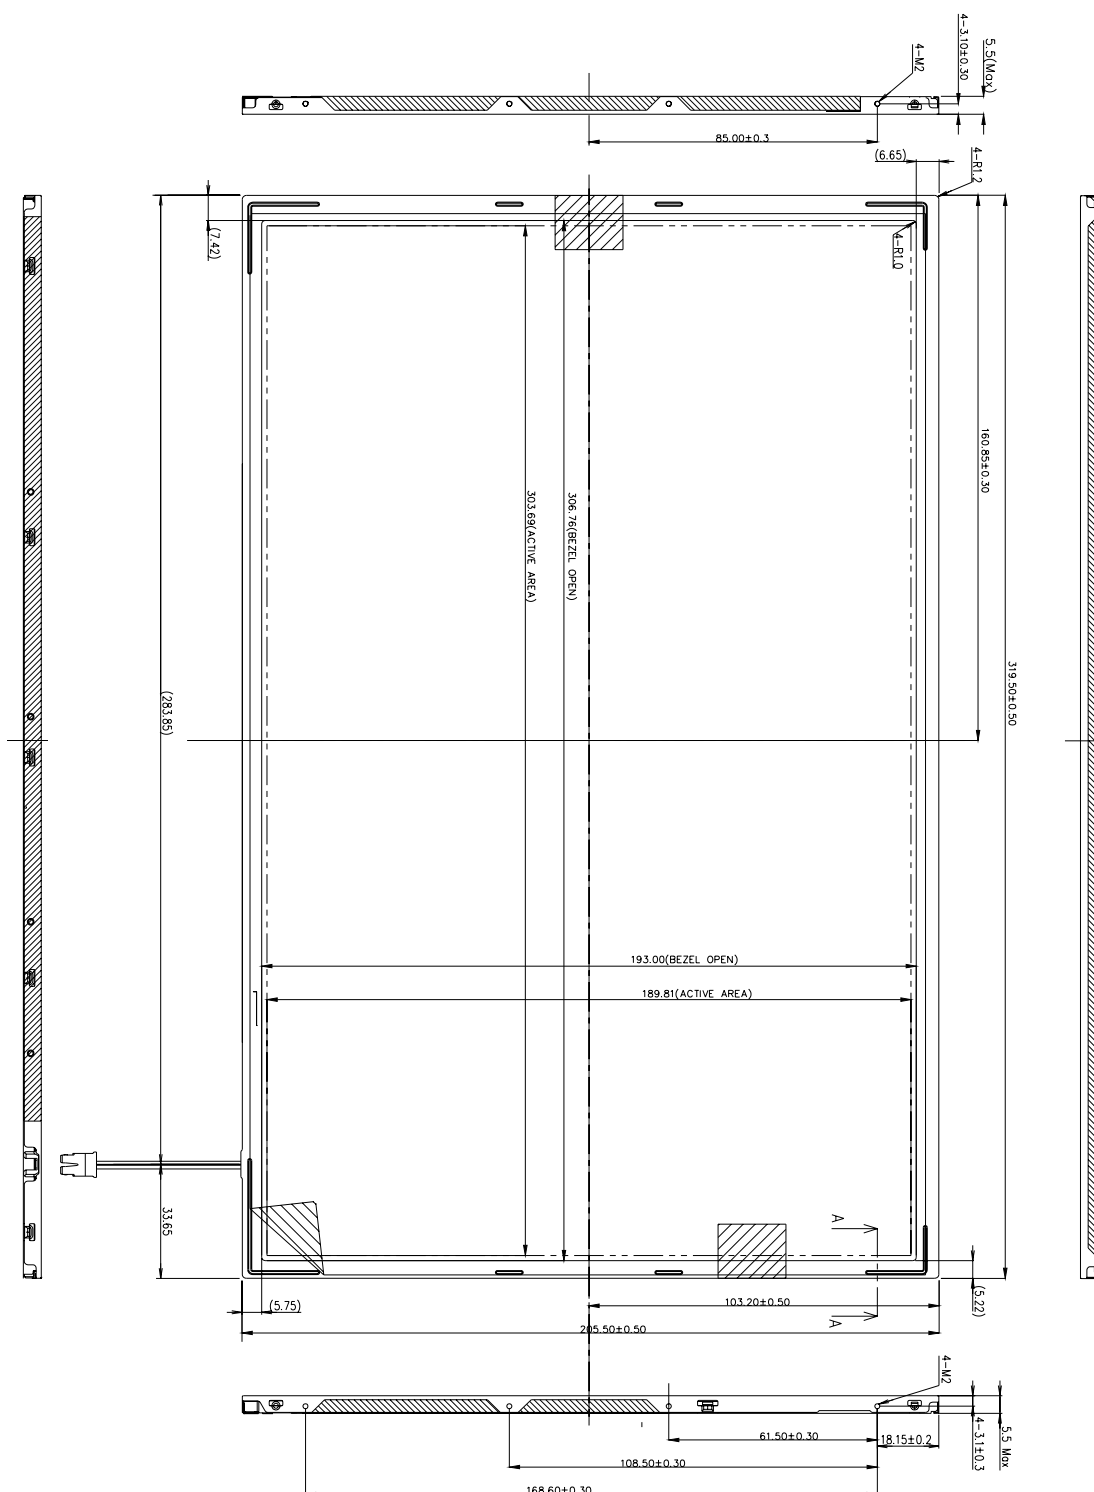## 5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP141WP1. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	320 ± 0.5mm
	Vertical	206 ± 0.5mm
	Depth	5.5mm (max)
Bezel Area	Horizontal	306.76 ± 0.5mm
	Vertical	193 ± 0.5mm
Active Display Area	Horizontal	303.69 mm
	Vertical	189.81 mm
Weight	425g (Typ.) 435g (Max.)	
Surface Treatment	Glare treatment of the front polarizer	

LG.PHILIPS LCD

Product Specification

<FRONT VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

LG.PHILIPS LCD

Product Specification

<REAR VIEW>   Note) Unit:[mm], General tolerance: ± 0.5mm

108.50±1.00

30±1.0

LP141WP1
(TL)(B3)

Lead-free

LG.PHILIPS LCD

60911-0000A
050305   A01

COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS
A SMALL AMOUNT OF MERCURY. PLEASE FOLLOW LOCAL
ORDINANCES OR REGULATIONS FOR DISPOSAL.

14156KZ300001 C11

MADE IN KOREA
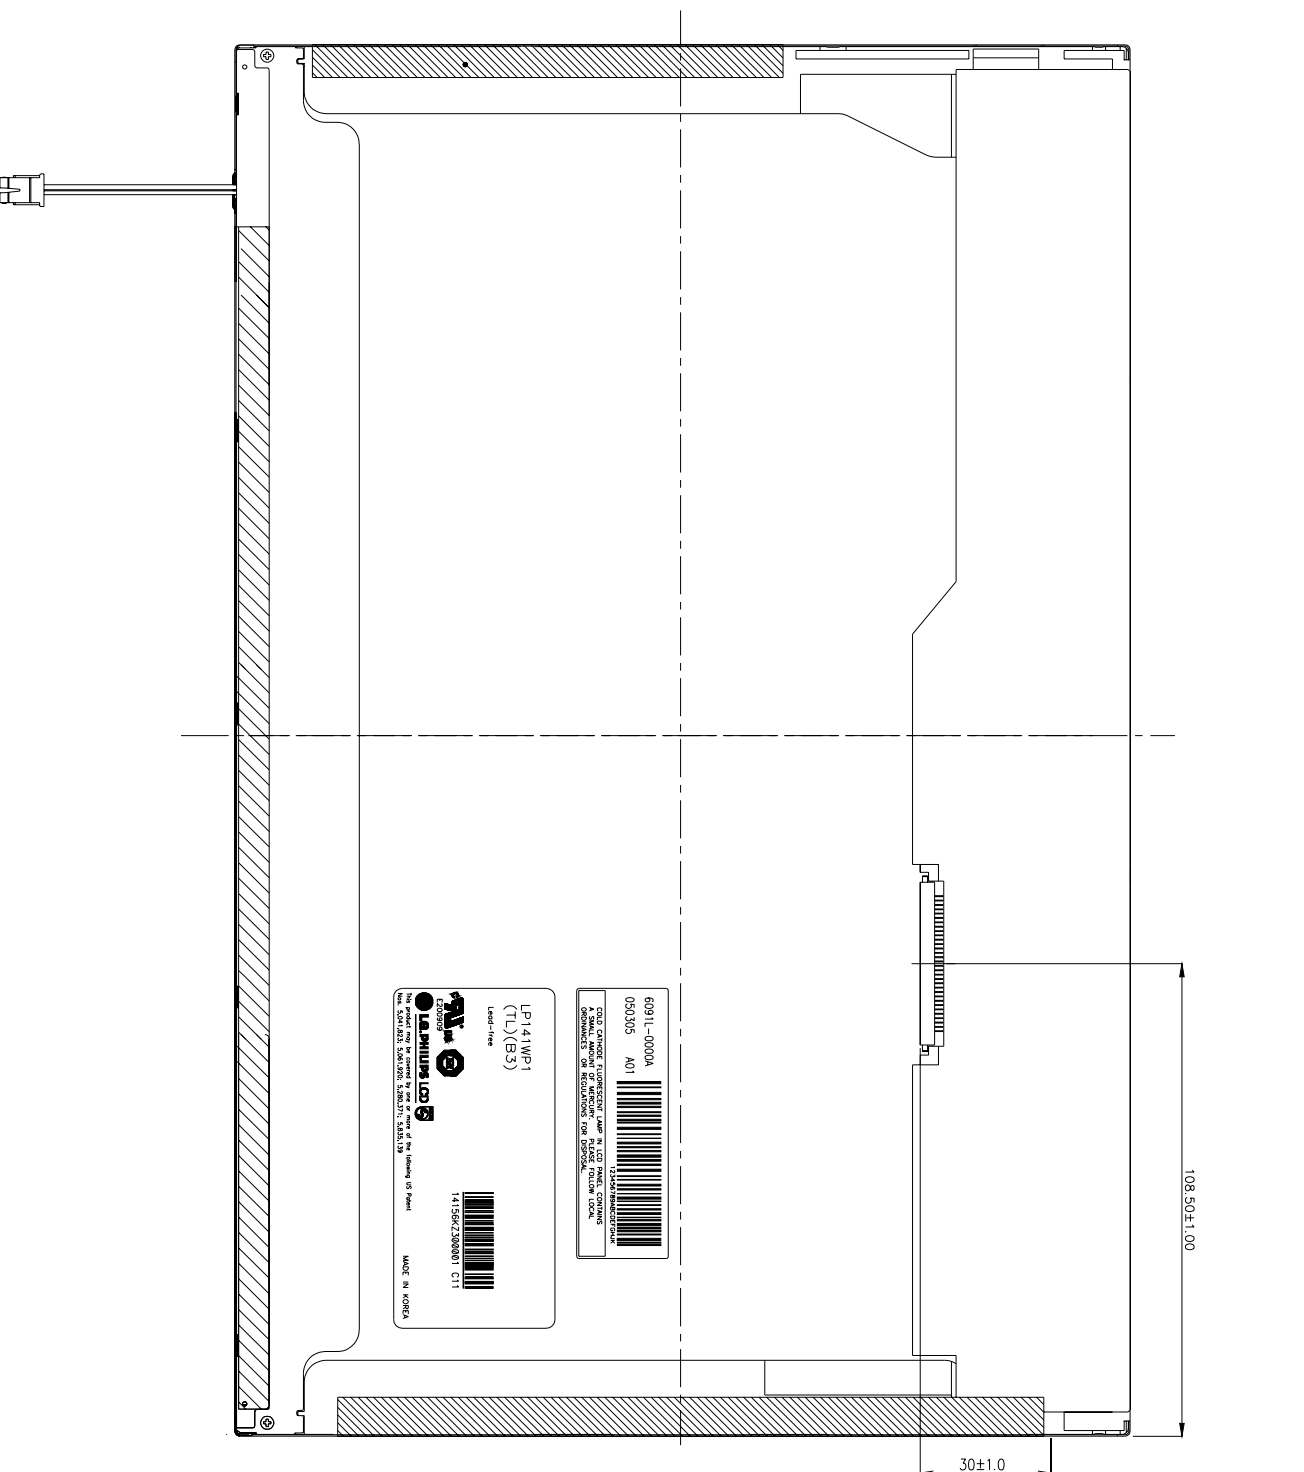
[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

4-M2

3.1±0.3

5.2

Min 1.8, Max 2.5
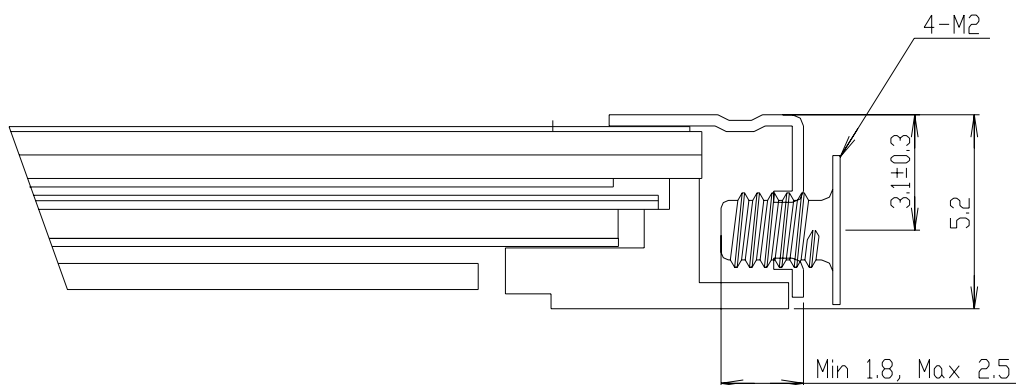
SECTION A-A
SCALE 5/1

*SCREW(8ea) TORQUE : 2kgf.cm max
*Mounting SCREW Depth : 2.5mm max

Note) Unit:[mm], General tolerance: ± 0.5mm

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }
There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

7. International Standards

7-1. Safety

a) UL 60950, Third Edition, Underwriters Laboratories, Inc., Dated Dec. 11, 2000.
Standard for Safety of Information Technology Equipment, Including Electrical Business Equipment.
b) CAN/CSA C22.2, No. 60950, Third Edition, Canadian Standards Association, Dec. 1, 2000.
Standard for Safety of Information Technology Equipment, Including Electrical Business Equipment.
c) EN 60950 : 2000, Third Edition
IEC 60950 : 1999, Third Edition
European Committee for Electrotechnical Standardization(CENELEC)
EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

7-2. EMC

a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHZ to 40GHz. "American National Standards Institute(ANSI), 1992
b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998
(Including A1: 2000)

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M

A,B,C : SIZE(INCH)   D : YEAR
E : MONTH   F : FACTORY CODE
G : ASSEMBLY CODE   H ~ M : SERIAL NO.

Note
1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

3. FACTORY CODE

Factory Code	LPL Gumi	LPL Nanjing	HEESUNG
Mark	K	C	D

4. SERIAL NO.

Mark	100001~199999, 200001~299999, 300001~399999, …., A00001~A99999, ….., Z00001~Z99999

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 20ea

b) Box Size : 430 X 334 X 287

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

(1) You must mount a module using holes arranged in four corners or four sides.
(2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
(3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
(4) You should adopt radiation structure to satisfy the temperature specification.
(5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
(6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
    Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
(7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
(8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
(9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

(1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
    V=$\pm$ 200mV(Over and under shoot voltage)

(2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
(3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
    And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
(4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
(5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
(6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

(1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
(2) The polarizer surface should not come in contact with any other object.
   It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

(1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
(2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
   Please carefully peel off the protection film without rubbing it against the polarizer.
(3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
(4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)
Header	0	Header	00	00000000
	1	Header	FF	11111111
	2	Header	FF	11111111
	3	Header	FF	11111111
	4	Header	FF	11111111
	5	Header	FF	11111111
	6	Header	FF	11111111
	7	Header	00	00000000
Vendor / Product EDID Version	8	EISA manufacture code = LPL	32	00110010
	9	EISA manufacture code (Compressed ASCII)	0C	00001100
	0A	Panel Supplier Reserved – Product Code	00	00000000
	0B	Panel Supplier Reserved – Product Code	00	00000000
	0C	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	0D	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	0E	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	0F	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000
	10	Week of manufacture	00	00000000
	11	Year of manufacture = 2005	0F	00001111
	12	EDID structure version # = 1	01	00000000
	13	EDID revision # = 3	03	00000011
Display Parameters	14	Video input definition = Digital I/p, non TMDS CRGB	80	10000000
	15	Max H image size(cm) = 30.369cm(30)	1E	00011110
	16	Max V image size(cm) = 18.981cm(19)	13	00010011
	17	Display gamma = 2.20	78	01111000
	18	Feature support(DPMS) = Active off, RGB Color	0A	00001010
Panel Color Coordinates	19	Red/Green low Bits	AE	10101110
	1A	Blue/White Low Bits	10	00010000
	1B	Red X Rx = 0.588	96	10010110
	1C	Red Y Ry = 0.346	58	01011000
	1D	Green X Gx = 0.328	53	01010011
	1E	Green Y Gy = 0.549	8C	10001100
	1F	Blue X Bx = 0.157	28	00101000
	20	Blue Y By = 0.142	24	00100100
	21	White X Wx = 0.313	50	01010000
	22	White Y Wy = 0.329	54	01010100
Established Timings	23	Established Timing I	00	00000000
	24	Established Timing II	00	00000000
	25	Manufacturer's Timings	00	00000000
Standard Timing ID	26	Standard Timing Identification 1 was not used	01	00000001
	27	Standard Timing Identification 1 was not used	01	00000001
	28	Standard Timing Identification 2 was not used	01	00000001
	29	Standard Timing Identification 2 was not used	01	00000001
	2A	Standard Timing Identification 3 was not used	01	00000001
	2B	Standard Timing Identification 3 was not used	01	00000001
	2C	Standard Timing Identification 4 was not used	01	00000001
	2D	Standard Timing Identification 4 was not used	01	00000001
	2E	Standard Timing Identification 5 was not used	01	00000001
	2F	Standard Timing Identification 5 was not used	01	00000001
	30	Standard Timing Identification 6 was not used	01	00000001
	31	Standard Timing Identification 6 was not used	01	00000001
	32	Standard Timing Identification 7 was not used	01	00000001
	33	Standard Timing Identification 7 was not used	01	00000001
	34	Standard Timing Identification 8 was not used	01	00000001
	35	Standard Timing Identification 8 was not used	01	00000001

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)
Timing Descripter #1	36	1440 X 900 @ 60Hz mode : pixel clock = 88.750MHz	AB	10101011
	37	(Stored LSB first)	22	00100010
	38	Horizontal Active = 1440 pixels	A0	10100000
	39	Horizontal Blanking = 160 pixels	A0	10100000
	3A	Horizontal Active : Horizontal Blanking = 1440 : 160	50	01010000
	3B	Vertical Avtive = 900 lines	84	10000100
	3C	Vertical Blanking = 26 lines	1A	00011010
	3D	Vertical Active : Vertical Blanking = 900 : 26	30	00110000
	3E	Horizontal Sync. Offset = 48 pixels	30	00110000
	3F	Horizontal Sync Pulse Width = 32 pixels	20	00100000
	40	Vertical Sync Offset = 3 lines , Sync Width = 6 lines	36	00110110
	41	Horizontal Vertical Sync Offset/Width upper 2bits = 0	00	00000000
	42	Horizontal Image Size = 303.696mm(304)	30	00110000
	43	Vertical Image Size = 189.81mm(190)	BE	10111110
	44	Horizontal & Vertical Image Size	10	00010000
	45	Horizontal Border = 0	00	00000000
	46	Vertical Border = 0	00	00000000
	47	Non-interlaced ,Normal display ,no stereo ,Digital separate sync ,H/V pol negatives	18	00011000
Timing Descripter #2	48	1440 X 900 @ 60Hz mode : pixel clock = 88.750MHz	AB	10101011
	49	(Stored LSB first)	22	00100010
	4A	Horizontal Active = 1440 pixels	A0	10100000
	4B	Horizontal Blanking = 160 pixels	A0	10100000
	4C	Horizontal Active : Horizontal Blanking = 1440 : 160	50	01010000
	4D	Vertical Avtive = 900 lines	84	10000100
	4E	Vertical Blanking = 26 lines	1A	00011010
	4F	Vertical Active : Vertical Blanking = 900 : 26	30	00110000
	50	Horizontal Sync. Offset = 48 pixels	30	00110000
	51	Horizontal Sync Pulse Width = 32 pixels	20	00100000
	52	Vertical Sync Offset = 3 lines , Sync Width = 6 lines	36	00110110
	53	Horizontal Vertical Sync Offset/Width upper 2bits = 0	00	00000000
	54	Horizontal Image Size = 303.696mm(304)	30	00110000
	55	Vertical Image Size = 189.81mm(190)	BE	10111110
	56	Horizontal & Vertical Image Size	10	00010000
	57	Horizontal Border = 0	00	00000000
	58	Vertical Border = 0	00	00000000
	59	Module "A" Revision (Example : 00 , 01 , 02 , 03 , etc.)	00	00000000
Timing Descripter #3 Dell specific information	5A	Flag	00	00000000
	5B	Flag	00	00000000
	5C	Flag	00	00000000
	5D	Dummy Descriptor	FE	11111110
	5E	Flag	00	00000000
	5F	Dell P/N 1st Character = H	48	01001000
	60	Dell P/N 2st Character = C	43	01000011
	61	Dell P/N 3st Character = 9	39	00111001
	62	Dell P/N 4st Character = 4	34	00110100
	63	Dell P/N 5st Character = 8	38	00111000
	64	LCD Supplier EEDID Revision # = VER 0.2	02	00000010
	65	Manufacturer P/N = 1	31	00110001
	66	Manufacturer P/N = 4	34	00110100
	67	Manufacturer P/N = 1	31	00110001
	68	Manufacturer P/N = W	57	01010111
	69	Manufacturer P/N = P	50	01010000
	6A	Manufacturer P/N = 1	31	00110001
	6B	Manufacturer P/N (If<13 char, then terminate with ASC II code 0Ah ,set remaining char = 20h)	0A	00001010

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™)   3/3

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)
Timing Descripter #4	6C	Flag	00	00000000
	6D	Flag	00	00000000
	6E	Flag	00	00000000
	6F	Data Type Tag : Undefined	FE	11111110
	70	Flag	00	00000000
	71	SMBUS Value = 10 nits +/- 10% (5 - point average)	1F	00011111
	72	SMBUS Value = 17 nits +/- 10% (5 - point average)	2F	00101111
	73	SMBUS Value = 24 nits +/- 10% (5 - point average)	37	00110111
	74	SMBUS Value = 30 nits +/- 10% (5 - point average)	3F	00111111
	75	SMBUS Value = 60 nits +/- 10% (5 - point average)	6F	01101111
	76	SMBUS Value = 110 nits +/- 10% (5 - point average)	87	10000111
	77	SMBUS Value = 150 nits +/- 10% (5 - point average)	9F	10011111
	78	SMBUS Value = MAX nits (Typically = FFh, 220 nits)	D7	11010111
	79	Number of LVDS receiver = 2	02	00000010
	7A	Panel self Test(00 - Not present, 01 - Present)	01	00000001
	7B	(If<13 char,then terminate with ASCII code 0Ah, set remaining char=20h)	0A	00001010
	7C	(If<13 char,then terminate with ASCII code 0Ah, set remaining char=20h)	20	00100000
	7D	(If<13 char,then terminate with ASCII code 0Ah, set remaining char=20h)	20	00100000
Checksum	7E	Extension flag = 00	00	00000000
	7F	Checksum	5E	01011110