AUO

CUSTOMER APPROVAL SHEET

Company Name	
MODEL	**A015AN05 V0**
CUSTOMER APPROVED	Title : Name :

☐ **APPROVAL FOR SPECIFICATIONS ONLY (Spec. Ver.____)**
☐ **APPROVAL FOR SPECIFICATIONS AND ES SAMPLE (Spec. Ver.____)**
☐ **APPROVAL FOR SPECIFICATIONS AND CS SAMPLE (Spec. Ver.____)**
☐ **CUSTOMER REMARK :**

AUO PM :
   P/N : _____
   Comment :

Product Specifications

1.5″ COLOR TFT-LCD MODULE

Model Name：   A015AN05 V0

Planned Lifetime: 2008/01 ~ 2010/12

Phase-out Control: 2010/06 ~ 2010/12

EOL Schedule: 2010/12

<   > Preliminary Specification

< □ > Final Specification

Note: The content of this specification is
subject to change.

Record of Revision

Version	Revise Date	Page	Content
0	2007/10/30		First draft
0.1	2007/11/15	5	Add VGH、VGoff_L and VGoff_H voltage spec
		23~24	Update Fig8 and Fig9
0.2	2008/04/24	3	Renamed pin29~pin31 CS/SDA/SCL to CSB /SDA/SCL , and update Note2
		4	Add pin18~pin20 and pin29~pin31 initial signal state and renamed AVSS to AGND and add Remark description.
		5	Renamed AVSS to AGND and add power supply to title and update Note description. Add Note2
		6	Add Note1,Note2 and current to title.
		7	Update table Back porch and Front porch value
		13	Update DC-DC converter block diagram.
		21~23	Add Register R5 function
		24~25	Reversion the description of the application circuit
		26~27	Update GRB pin and VSYNC sequence
0.3	2008/05/08	24~25	Update Fig8 and Fig9
		5	Update COMDC min and max value
0.4	2008/05/23	5	Update absolute maximum ratings
		27	Update fig VSYNC、GRB pin and R2 D3 bit signal Add Note description
0.5	2008/07/03	5	Update AVDD and VCOM absolute maximum ratings value
0.6	2008/08/05	8	Update max DCLK frequency value
		18	Add note for removing protection film before RA test
		20	Add note for no stress or attachment on the back of LCD module
0.6a	2008/09/10	21	Correct fig 8 CF pixel shift-left for all even row
0.6b	2008/10/15	18	Update 7. Electrostatic discharge condition
		27	Update fig8
		28	Update fig9
		31	Update LED lifetime

Table of contents

A. Physical Specifications

No.	Item	Specification	Remark
1	Display resolution (dot)	280 (W) ×220 (H)	
2	Active area (mm)	29.96 (W) ×22.66 (H)	
3	Screen size (inch)	1.48 (Diagonal)	
4	Dot pitch (mm)	0.107 (W) ×0.103 (H)	
5	Color configuration	R. G. B. delta	
6	Overall dimension (mm)	37.06 (W) ×34 (H) ×3.04 (D)	Note 1
7	Weight (g)	6 Typ	
8	Panel surface treatment	Hard coating (3H)	

Note 1: Refer to Fig. 5

B. Electrical Specifications

1. Pin assignment (Note1)

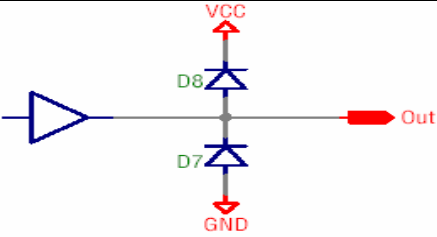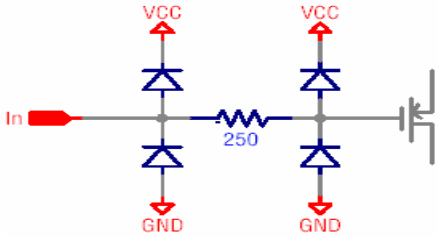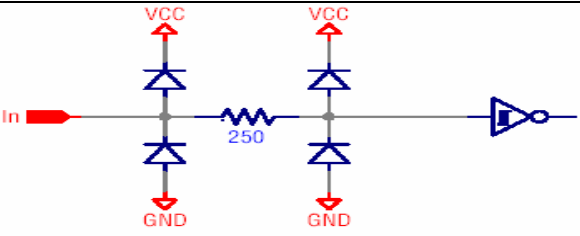| Pin no.	Symbol	I/O	Description	Remark
1	VCOM	I	Common electrode driving signal	
2	VGH	C	Positive power for scan driver	
3	V1	C	Power setting capacitor connect pin	
4	V2	C	Power setting capacitor connect pin	
5	Vgoff_H	C	Negative power supply (High) for G1~G240 outputs	
6	Vgoff_L	C	Negative power supply (Low) for G1~G240 outputs	
7	V3	C	Power setting capacitor connect pin	
8	V4	C	Power setting capacitor connect pin	
9	AVDD1	C	FRP level supply	
10	FRP	O	Frame polarity output for panel Vcom	
11	GND	P	Ground pin for digital circuits	
12	DRV	O	Power transistor gate signal for the boost converter	
13	LED Anode	P	LED Anode and power supply for charge pump	
14	FB	I / P	LED cathode and main boost regulator feedback input	
15	VCC	P	Power supply for digital circuits	
16	AGND	P	Ground pin for analog circuits	
17	AVDD	P	Power supply for analog circuits	
18	HSYNC	I	Horizontal sync input. Negative polarity	
19	VSYNC	I	Vertical sync input. Negative polarity	
20	DCLK	I	Clock signal; latch data onto line latches at the rising edge	
21	DD5	I	Data input: MSB	
22	DD4	I	Data input	
23	DD3	I	Data input	
24	DD2	I	Data input	
25	DD1	I	Data input	
26	DD0	I	Data input: LSB	
27	V5	C	Power setting capacitor connect pin	Note2
28	GRB	I	Global reset pin	
29	CSB	I	Serial communication chip select	Note3
30	SDA	I	Serial communication data input	Note3
31	SCL	I	Serial communication clock input	Note3
32	VCC	P	Power supply for digital circuits	
33	GND	P	Ground pin for digital circuits	

I: input; O: output, P: power
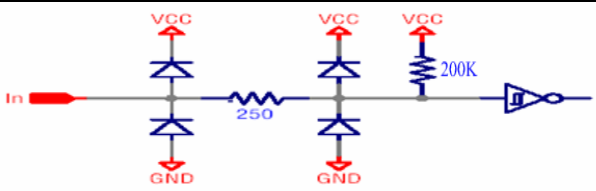
Note 1: For definition of scanning direction, please refer to figure as follows:
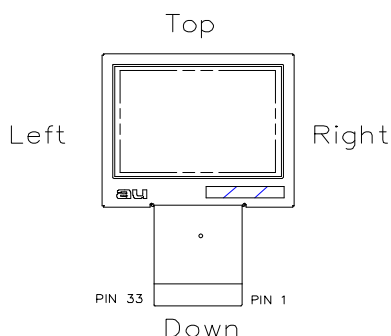
Note 2:The capacitor of V5(pin27) is needed.
Note 3: Please refer to application note for 3-wire serial communication setting.

2. Equivalent circuit of I/O

Pin no. & Pin name	Schematics
12.DRV	
14.FB	
18.HSYNC 19.VSYNC 20.DCLK 21.DD5 22.DD4 23.DD3 24.DD2 25.DD1 26.DD0 29.CSB 30.SDA 31.SCL	
28.GRB	

3. Absolute maximum ratings

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Supply Voltage	VCC	GND=0V	-0.5	5	V	
	AVDD	AGND=0V	-0.5	5.5	V	
TFT-LCD Power Voltage	VGH	AGND=GND=0V	0	16	V	
	Vgoff_H	AGND=GND=0V	-10	0	V	
	Vgoff_L	AGND=GND=0V	-16	0	V	
Input Signal Voltage	CS,SDA,SCL,Vsync,Hsync,DCLK,D0~D7	AGND=GND=0V	-0.5	5	V	
VCOM AC Output Voltage	FRP	AGND=GND=0V	0	8	V	
VCOM AC Power Voltage	VCAC	AGND=GND=0V	0	8	V	
VCOM DC Output Voltage	COMDC	AGND=GND=0V	0	5	V	
VCOM Input Voltage	VCOM	AGND=GND=0V	-2.9	5.6	V	
	V1	AGND=GND=0V	0	16	V	
	V2	AGND=GND=0V	0	8	V	
	V3	AGND=GND=0V	0	16	V	
	V4	AGND=GND=0V	-16	0	V	
Storage Temperature	Tstg	-	-25	80	℃	Ambient temperature
Operating Temperature	Topa	-	0	60	℃	Ambient temperature

4. Electrical characteristics

a. Typical operating conditions (GND = AGND = 0V)

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply		V_{CC}	3.0	3.3	3.6	V	
		AV_{DD}	3.0	3.3	3.6	V	
Output Signal voltage	H Level	V_{OH}	Vcc-0.4				
	L Level	V_{OL}	GND		GND+0.4		
Input Signal voltage	H Level	V_{IH}	$0.7V_{CC}$	-	V_{CC}	V	
	L Level	V_{IL}	GND	-	$0.3V_{CC}$	V	
Output current	H Level	IOH		10		uA	
	L Level	IOL		-10		uA	
Analog stand by current		Ist			200	uA	DCLK is stopped
VCOM Voltage		V_{CAC}	4.4	5.6	5.8	V	
		V_{CDC}	0.30	0.45	0.60	V	
Positive Power Supply		VGH	12	13	14	V	
Negative Power supply (Low)		VGoff_L	-14	-13	-12	V	
Negative Power supply (High)		VGoff_H	-8.4	-7.4	-6.4	V	

b. Recommended Capacitance Values of External Capacitor

The recommended capacitance values of the external capacitor are shown below. These values should be finally determined only after performing sufficient evaluation on the module.

Pin name	Operating value of capacitors (μF)	Withstanding voltage (V)
V5	4.7 to 10	6.3(Note)
VCC	1 to 10	6.3
AVDD	1 to 10	6.3
AVDD1	1 to 10	10
VGH	1 to 10	16
Vgoff_H, Vgoff_L	1 to 10	16
V1, V2	1 to 10	16
V3, V4	1 to 10	16
FRP	10	16
LED_Anode	10	16

Note1: The capacitors of V5 (27pin) is needed.
Note2: Typical operating capacitors reference suggested reference application circuit

c. Current consumption (GND = AGND = 0V)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Current	I_{CC}	V_{CC} = 3.3V	-	2	2.5	mA	Note1
	I_{DD}	AV_{DD} = 3.3V	-	1.5	2.0	mA	Note2

Note1:This power consumption doesn't include LED power consumption.

Note2:Test condition: 8colorbar+Grayscale pattern, UPS051 mode, DCLK=5.67MHz, frame
rate:60Hz.

d. LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED current	I_{LED}	20	25	25.5	mA	Note1
	$I_{LED-anode}$	22	25	25.5	mA	Note2
LED voltage	V_L	6.8	7.8	9	V	Note3

Note1: Internal LED booster circuit. FB=0.6V

Note2: External LED circuit. FB=0.2V

Note3: V_L = LED Anode (PIN 13), LED Max. Voltage: 1pcs/3.6V, LED Min. Voltage: 1pcs/3.0V.
@I_{LED}=25mA.

5. Input timing AC characteristic

(VCC=3.3V, AVDD=3.3V, AGND=GND=0V, TA=-25℃~85℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK period time	t_{DCLK}	37	-	-	ns	
HSYNC period time	Th	60	63.56	67	us	
VSYNC setup time	Tvst	12	-	-	ns	
VSYNC hold time	Tvhd	12	-	-	ns	
HSYNC setup time	Thst	12	-	-	ns	
HSYNC hold time	Thhd	12	-	-	ns	
Data setup time	Thst	12	-	-	ns	
Data hold time	Thhd	12	-	-	ns	
HSYNC width	Thsw	1	1	96	t_{DCLK}	
VSYNC width	Tvsw	1 t_{DCLK}	1 t_{DCLK}	6Th		
DCLK duty cycle	Tcwh/Tcwl	40	50	60	%	
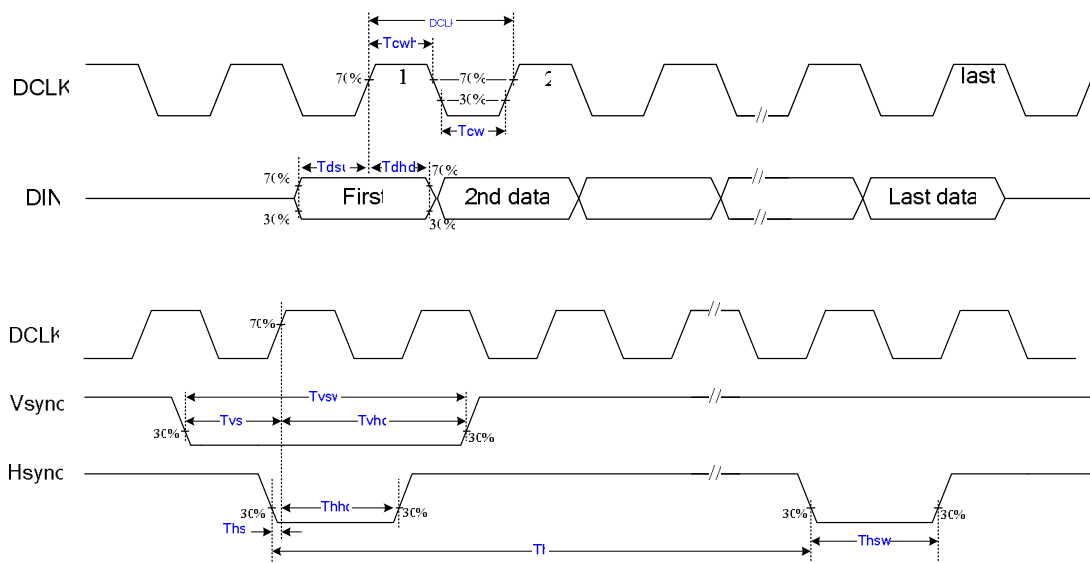
6. AC Timing

a. UPS051 Timing conditions

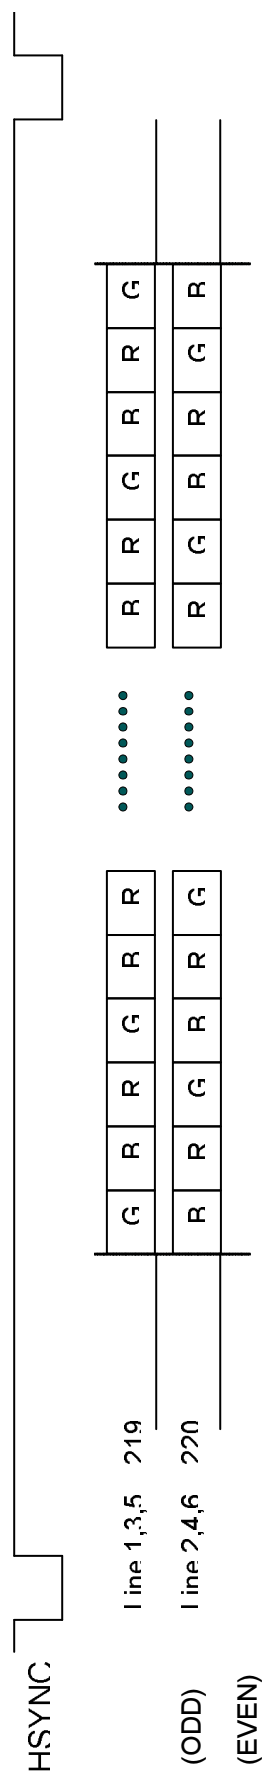| Parameter		Symbol	Min.	Typ.	Max.	Unit.	Remark
DCLK Frequency		$1/t_{DCLK}$	5.62	5.67	12	MHz	
HSYNC	Period	t_H		360		t_{DCLK}	
	Display period	t_{hd}		280		t_{DCLK}	
	Back porch	t_{hbp}	61	62	64	t_{DCLK}	Note1
	Front porch	t_{hfp}	19	18	16	t_{DCLK}	
	Pulse width	t_{hsw}	1	25	56	t_{DCLK}	
VSYNC	Period Odd	t_V	256	262.5	264	t_H	
	Period Even						
	Display period Odd	t_{vd}		220		t_H	
	Display period Even						
	Back porch Odd	t_{vb}		23		t_H	
	Back porch Even			23.5			
	Front porch Odd	t_{vf}	13	19.5	21	t_H	
	Front porch Even		12.5	19	20.5		
	Pulse width Odd	t_{vsw}	1 t_{DCLK}	3 t_H	6 t_H	-	
	Pulse width Even						

Note1: Horizontal display position:

Available display starts from the data of 63 t_{DCLK} when back porch value (t_{hbp}) set 62.

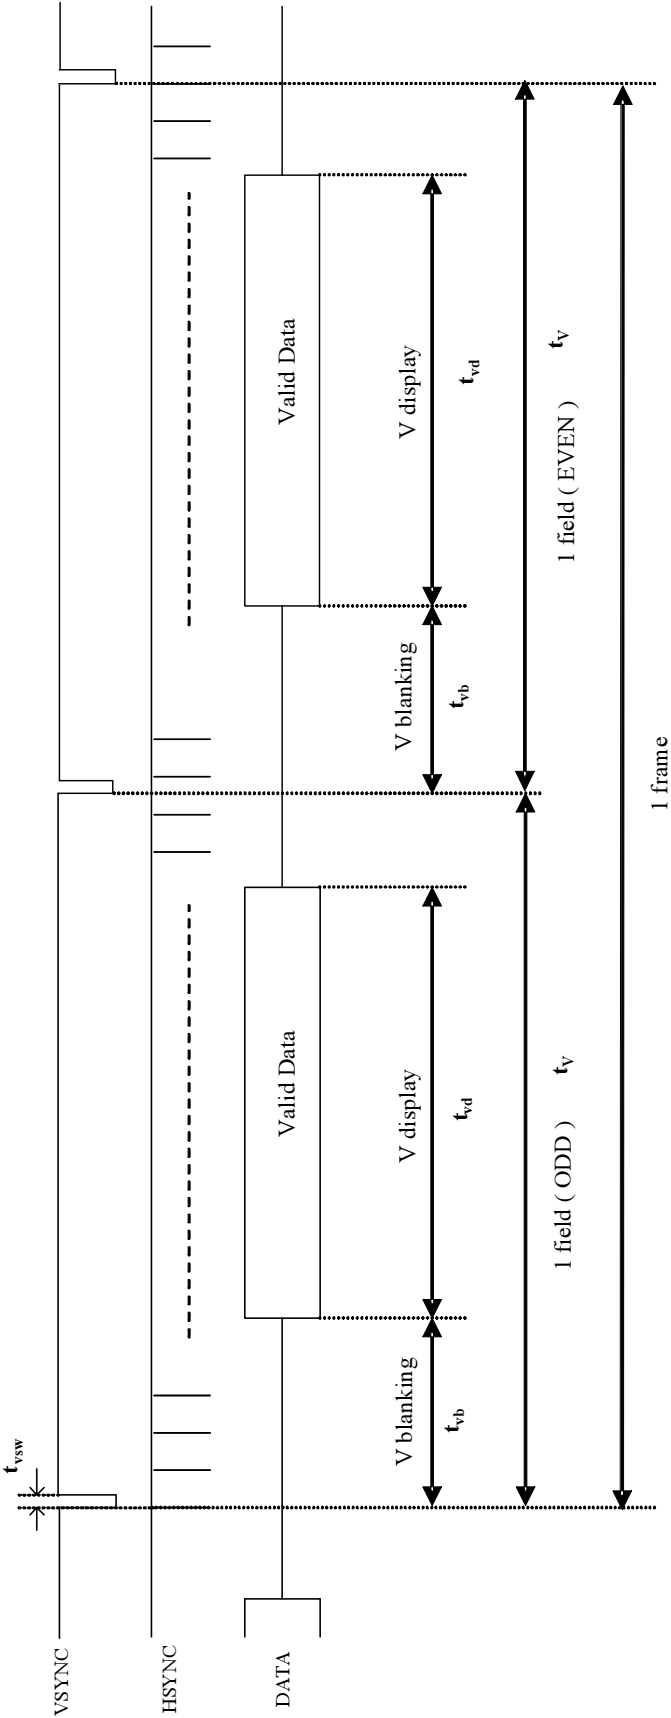Note2: UPS051 support interlacing input format

Note3: UPS051 support non-interlacing input format. Odd field only or even field only

UPS051 Input Horizontal Timing Chart
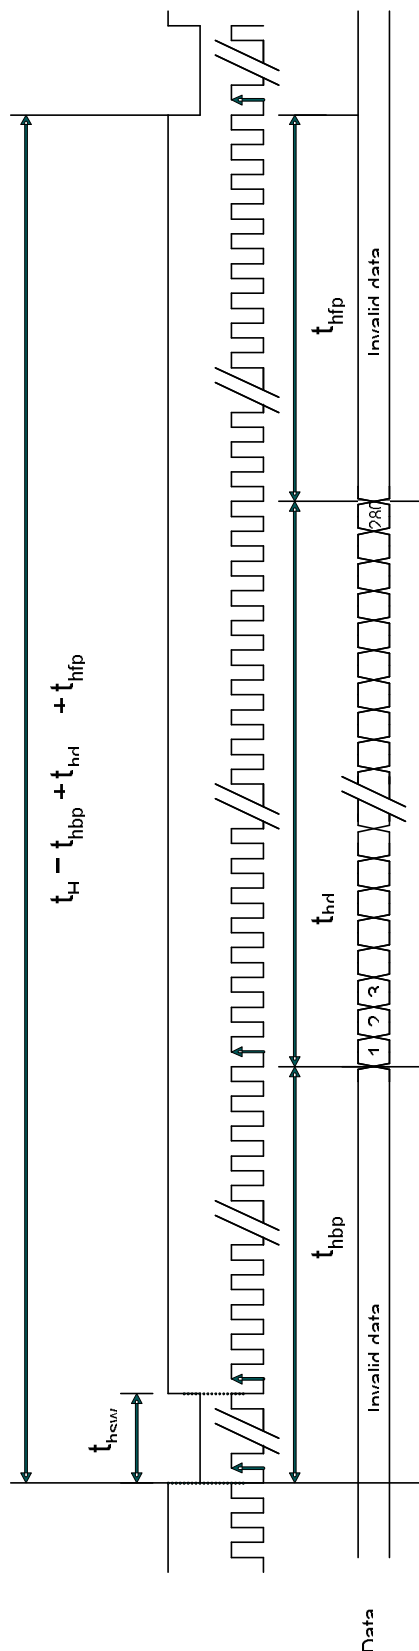
UPS051 Input Horizontal Data Sequence

UPS051 Input Vertical Timing Chart

b. UPS052 Timing conditions

| Parameter			Symbol	Min.	Typ.	Max.	Unit.	Remark
DCLK Frequency			$1/t_{DCLK}$	23.3	24.54	25.7	MHz	
HSYNC	Period		t_H		1560		t_{DCLK}	Note1
	Display period		t_{hdisp}		1280		t_{DCLK}	
	Back porch		t_{hbp}	248	249	251	t_{DCLK}	
	Front porch		t_{hfp}	32	31	29	t_{DCLK}	
	Pulse width		t_{hsw}	1	25	56	t_{DCLK}	
VSYNC	Period	Odd	t_V	256	262.5	264	t_H	
		Even						
	Display period	Odd	t_{vdisp}		220		t_H	
		Even						
	Back porch	Odd	t_{vb}		23		t_H	Note2
		Even			23.5			
	Front porch	Odd	t_{vf}	13	19.5	21	t_H	
		Even		12.5	19	20.5		
	Pulse width	Odd	t_{vsw}	1 t_{DCLK}	3 t_H	6 t_H	-	
		Even						

Note1: Horizontal display position:

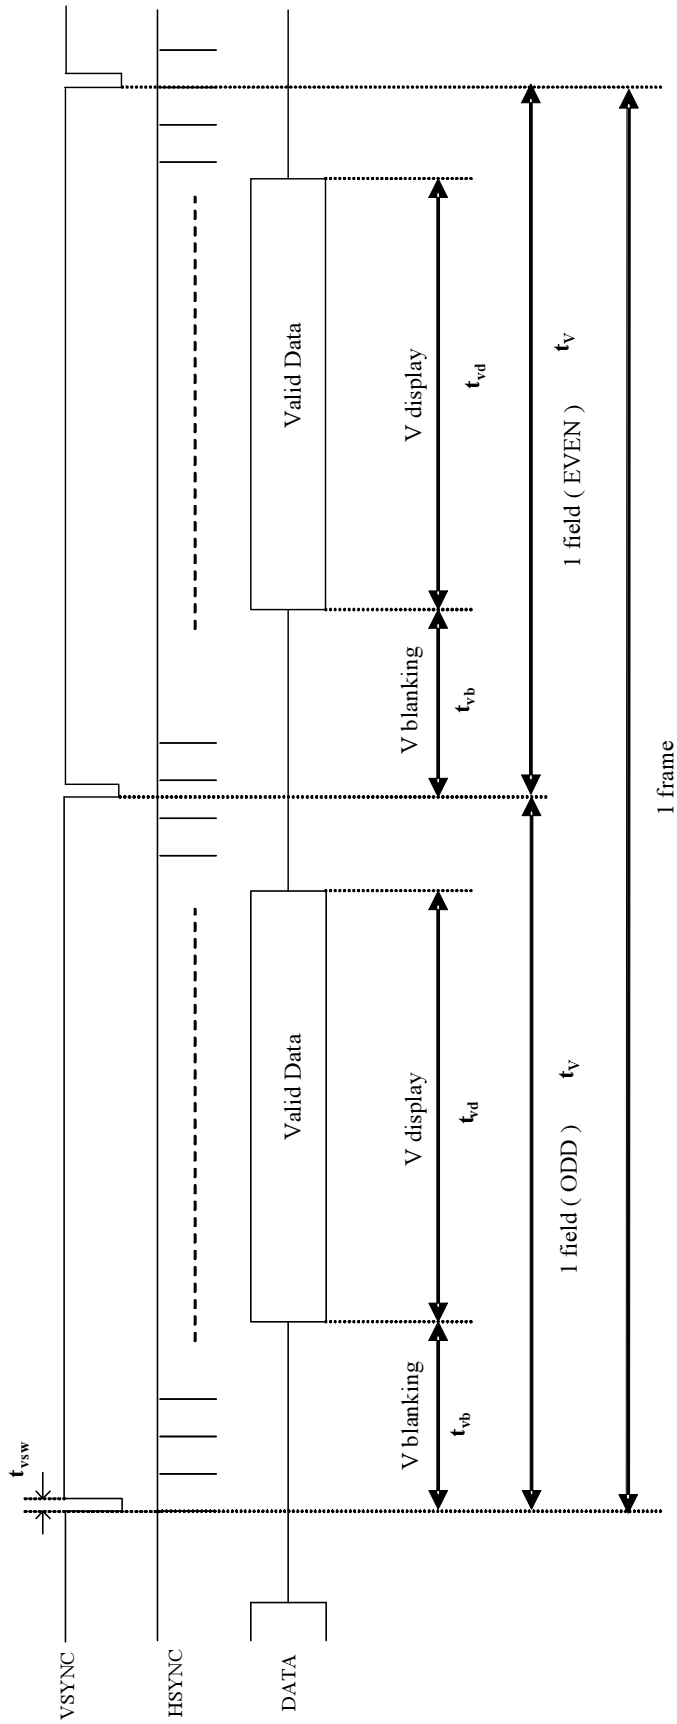Available display starts from the data of 266 t_{DCLK} when back porch value (t_{hbp}) set 249.

Note2: UPS052 support interlacing input format

Note3: UPS052 support non-interlacing input format. Odd field only or even field only.

UPS052 Input Horizontal Timing Chart

$$t_H = t_{hbp} + t_{hdisp} + t_{hfp}$$
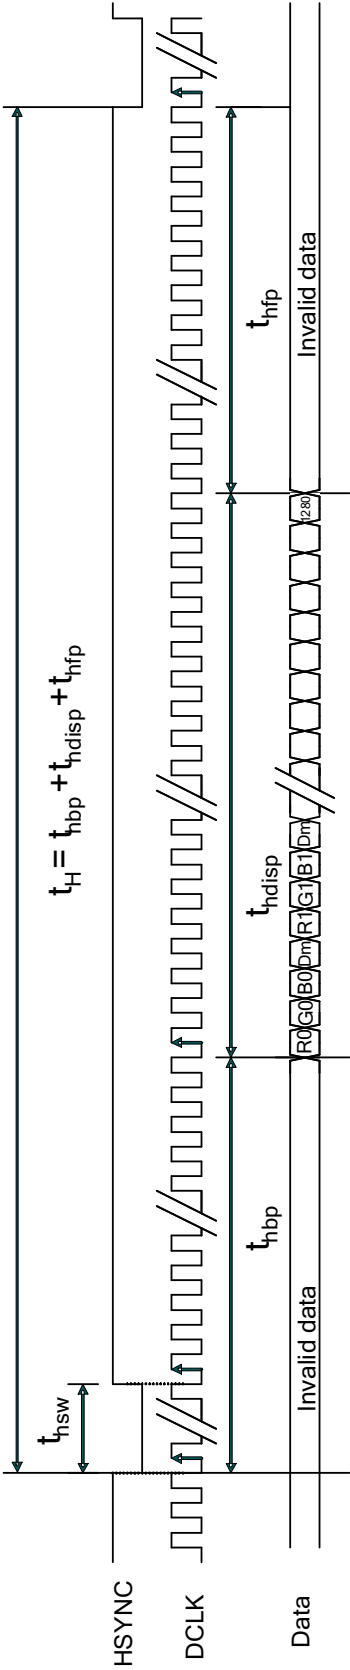
UPS052 Input Vertical Timing Chart

7. 3-wire serial communications

For 3-wire serial communication timing, it is shown in Fig.6. For register setting, please refer to application note.

8. DC-DC Converter Circuit

A015AN05 contains one high-power step-up DC-DC converter, and a backplane drive circuitry for active matrix TFT LCDs. The output voltage of the main boost converter can be set from VCC to 13.5V with external resistors. Also, there are a precision 0.6V reference voltage, a fault detection and a logic shutdown included in A015AN05.

a .Boost Converter

A015AN05 main boost converter uses a boost PWM architecture to produce a positive regulated voltage. Please refer to Fig. 1 for the DC-DC converter block diagram.
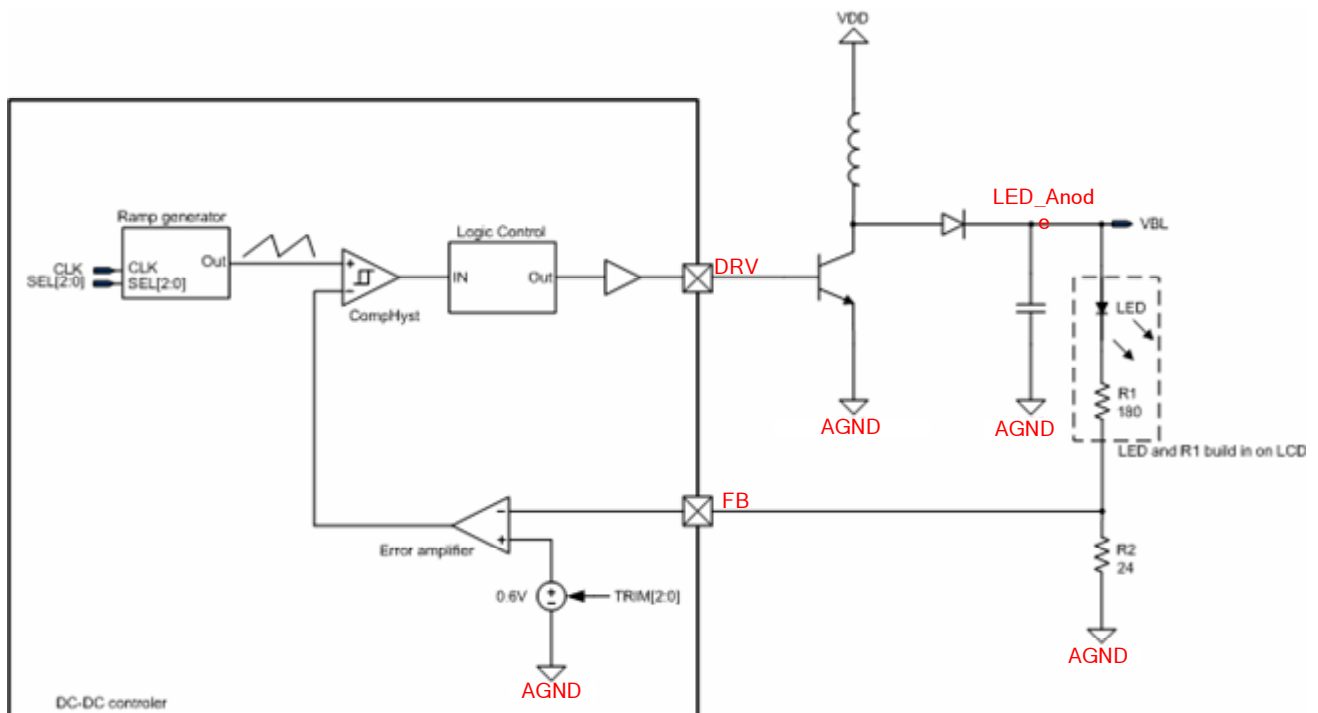

Fig. 1 Dc-Dc converter block diagram

In the internal architecture of DC-DC converter as shown in Fig. 2, the feedback voltage (VFB) will connect to the tri-angle waveform comparator, and generates the output signal (CP0) which determines the duty cycle for (Fdc).
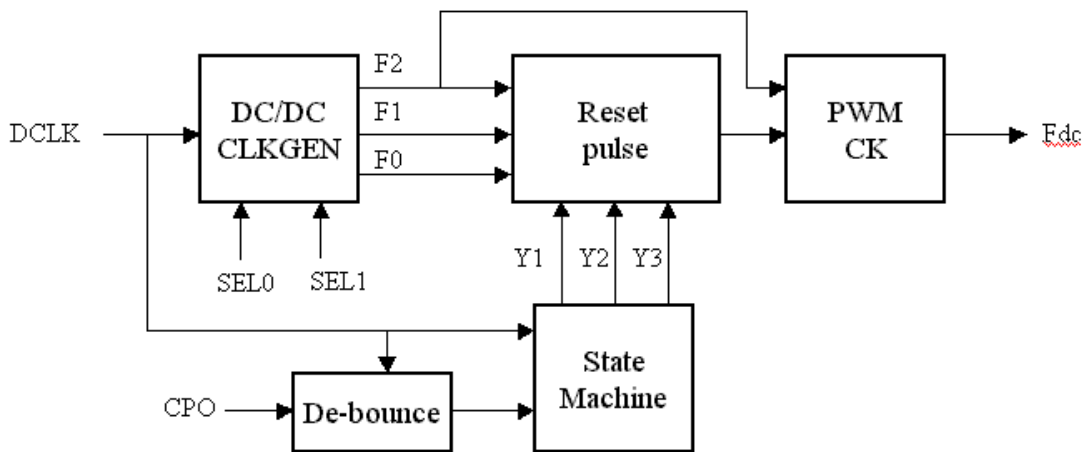
Fig. 2 DC CK block diagram

To reduce the noise affect, CP0 will be processed by De-bounce circuit. State-machine will generate the duty cycle by CP0 signal. To make sure that VFB can reach default VREF quickly, so that State-machine is designed as a discrete step by step function, please refer to Fig. 3. If CP0 is low, the duty cycle will work from 0% to 75%, and the maximum f that is 75%.
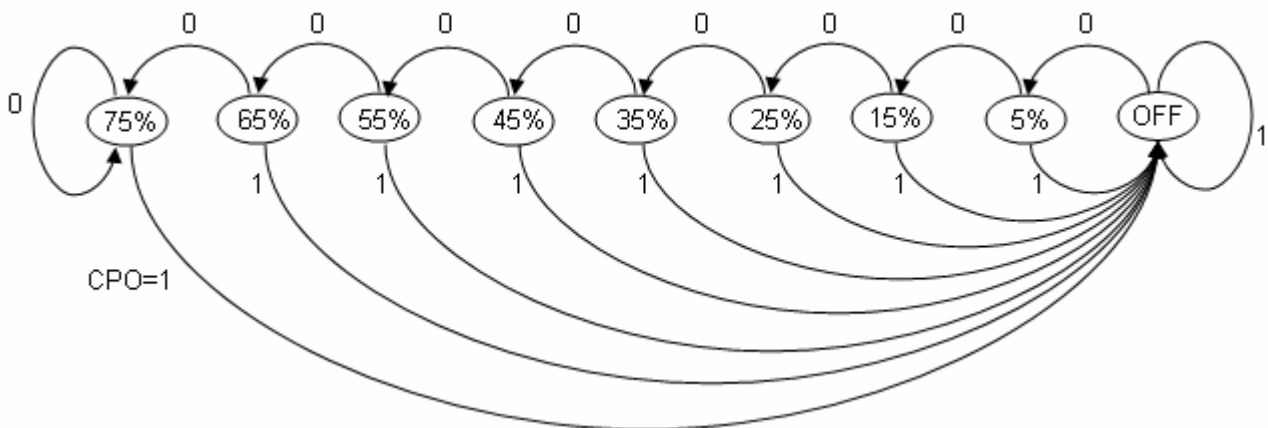

Fig. 3 PWM Control state diagram

b. Charge Pump Block Diagram

The LED_Anode Voltage is used for internal pump circuit to generate VGH/Vgoff_H/ Vgoff_L/Vcac for gate and VCOM used.
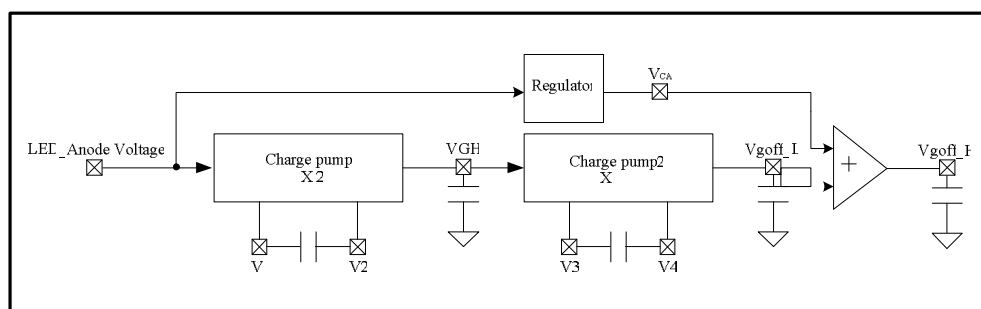

Fig. 4 charge pump diagram

C. Optical Specifications

| Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time								
	Rise	Tr	θ=0°	-	25	50	ms	Note 4
	Fall	Tf		-	30	60	ms	
Contrast ratio		CR	At optimized viewing angle	60	150	-		Note 5, 6
Viewing angle								
	Top		CR≧10	10	-	-	deg.	Note 7
	Bottom			30	-	-		
	Left			40	-	-		
	Right			40	-	-		
Brightness (25mA)		Y_L	θ=0°	130	170	-	cd/m^2	Note 8
White chromaticity	X		θ=0°	(0.26)	(0.31)	(0.36)		
	y		θ=0°	(0.28)	(0.33)	(0.38)		

Note 1 Ambient temperature = 25□.

Note 2 Measured in the dark room

Note 3 Measured on the center area of panel with a field angle of 1° by Topcon luminance meter BM-7, after 10 minutes operation.

Note 4 Definition of response time:

Output signals of photo detector are measured when the input signals are changed from "black" to "white" (falling time) and from "white" to "black" (rising time), respectively.
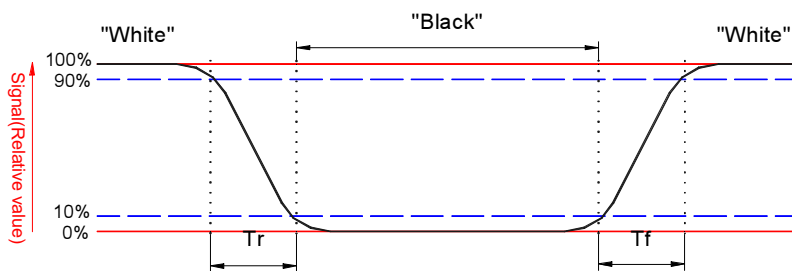
Response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to the figure as follows.

Note 5 Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 6 White Vi = V_{i50} ∓ 1.5V

Black Vi = V_{i50} ± 2.0V

"±" means that the analog input signal swings in phase with COM signal.

"∓" means that the analog input signal swings out of phase with COM signal.

$V_{i50:}$ The analog input voltage when transmission is 50%

100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 7 Definition of viewing angle:

Refer to the figure as follows.
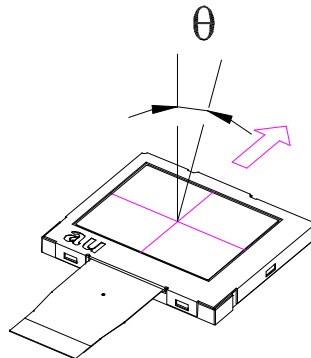
Note 8 Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

D. Reliability Test Items

| No.	Test items	Conditions	Remark
1	High temperature storage	Ta = 80□ 240Hrs	
2	Low temperature storage	Ta = -25□ 240Hrs	
3	High temperature operation	Ta = 60□ 240Hrs	
4	Low temperature operation	Ta = 0□ 240Hrs	
5	High temperature and high humidity	Ta = 60□. 90% RH 240Hrs	Operation
6	Heat shock	-25□~80□, 50 cycles, 2Hrs/cycle	Non-operation
7	Electrostatic discharge	Air-mode : +/- 8kV Contact-mode : +/- 4kV	Note.2, 3
8	Vibration (with carton)	Random vibration: $0.015G^2$/Hz from 5~200Hz –6dB/Octave from 200~500Hz	IEC 68-34
9	Drop (with carton)	Height: 60cm 1 corner, 3 edges, 6 surfaces	

Note1 Ta: Ambient temperature.

Make sure protection film(s) on top of polarizer or back of LCD module is/are removed before RA test.

Note2: ESD Testing Flow as the below,

LCD power on, Functional check	→	Electrostatic discharge	→	Functional check & judge the results
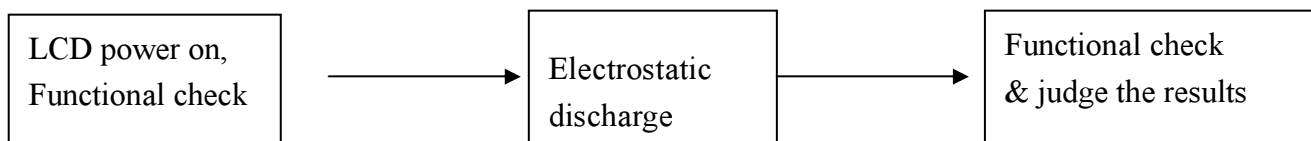
Note 3. ESD testing method.

Ambient: 24~26℃, 56~65%RH

Instruments:NoisekenESS-2000,

Operation System: "CX40FL-B" and adapter "A027DN01 VG"

Test Mode: Operating mode, test pattern: colorbar+8Gray scale

Test Method:

Contact Discharge: 150pF(330Ω) 1sec, 5 points, 10 times/point

Air Discharge: 150pF(330Ω) 1sec, 5 points, 10 times/point

Test point:
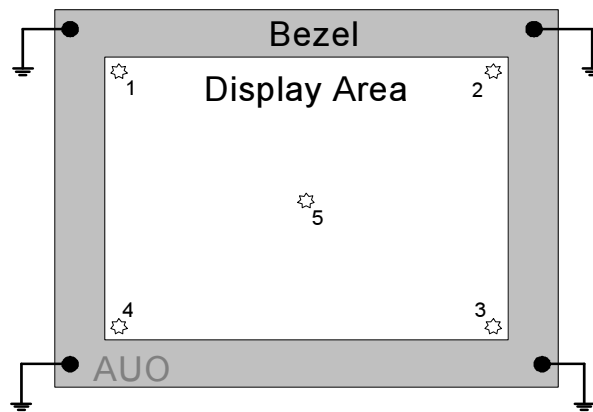
The metal casing is connected to power supply ground (0V) at four corners.

All register commands are repeating transfer.

E. Packing Form

CUSHION_EPE
84.02A02.005

CUSHION_EPE
84.02A02.006

CUSHION_EPE
84.02A02.007

CUSHION_EPE
84.02A02.005

CARTON
81.01A09.003

CUSHION_EPE
84.02A02.007

CUSHION_EPE
84.02A02.006

TAPE(60mm)
80.01A09.006

TAPE(60mm)
80.01A09.006

A/S_BAG
79.02A02.004

OPEN

TAPE(60mm)
80.01A09.006

翻轉180度包起

PS_TRAY
81.01A15.002

MODEL(A015AN04)
97.01A15.400

TRAY TURN 180°
ONE STRATUM OF 28 PCS

26 LAYER
25 LAYERS TO PUT 700 PCS

CARTON
81.01A09.003

MAX. CAPACITY:700 MODULES
MAX. WEIGHT: Kg
MEAS. 520mm*340mm*250mm

F. Outline drawing

Note: Any stress or attachment on the back of the LCD module is forbidden.

Fig. 5 Outline dimension of TFT-LCD module

G. Appendix
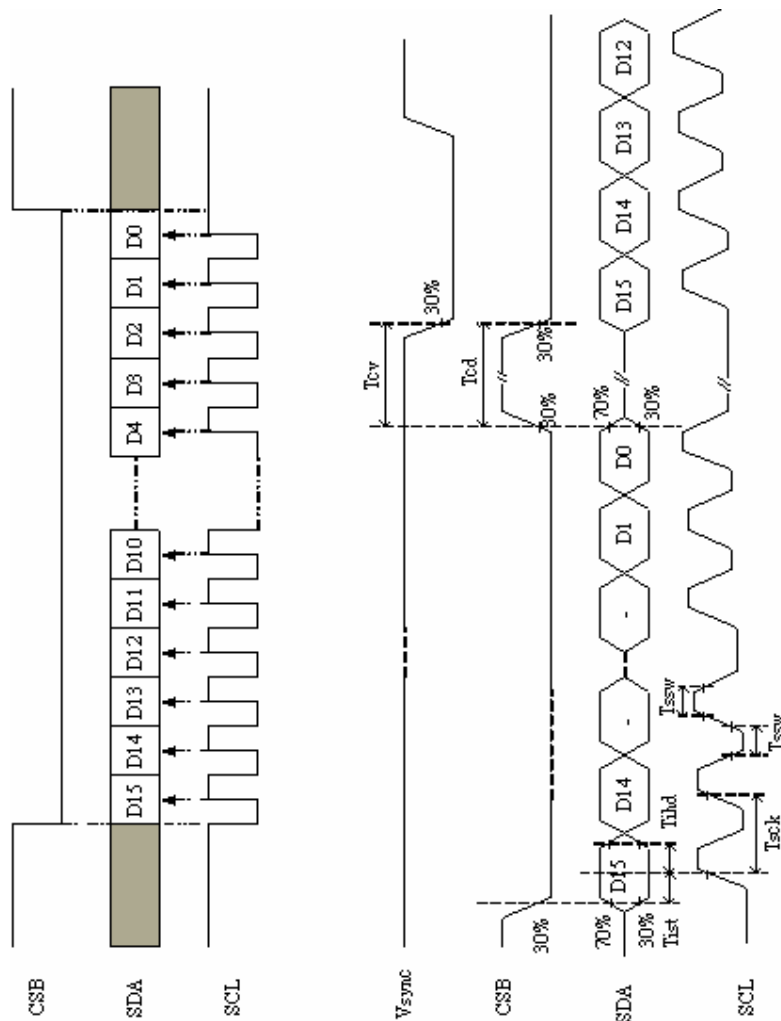
Fig. 6 3-wire programming function timing
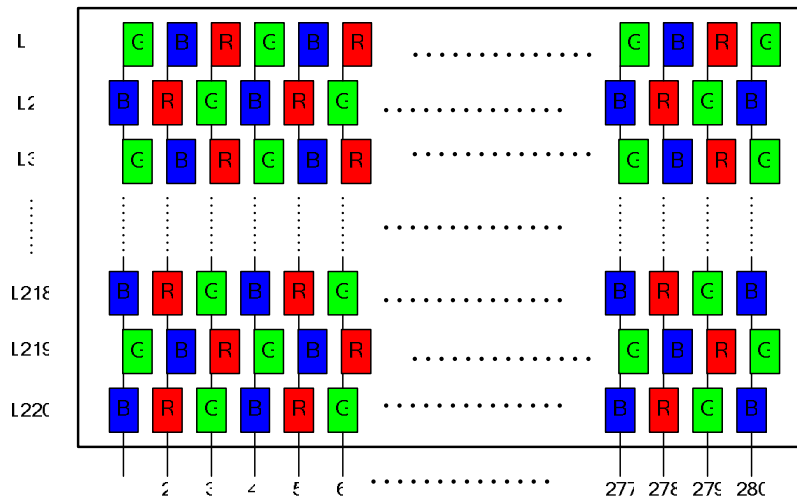
Fig. 7 Panel color Filter Alignment

H. Suggested Application Note

A015AN05 is designed with smart integration advance (SIA) concept for DSC application.　This panel integrated not only source driver & gate driver, but also built in power generator and embedded serial communication interface for the function setting.

A015AN05 is supported by two kinds of input timing format: UPS051 and UPS052. Customers can use 3-wire serial port for setting register and select different timing for their own design feature.
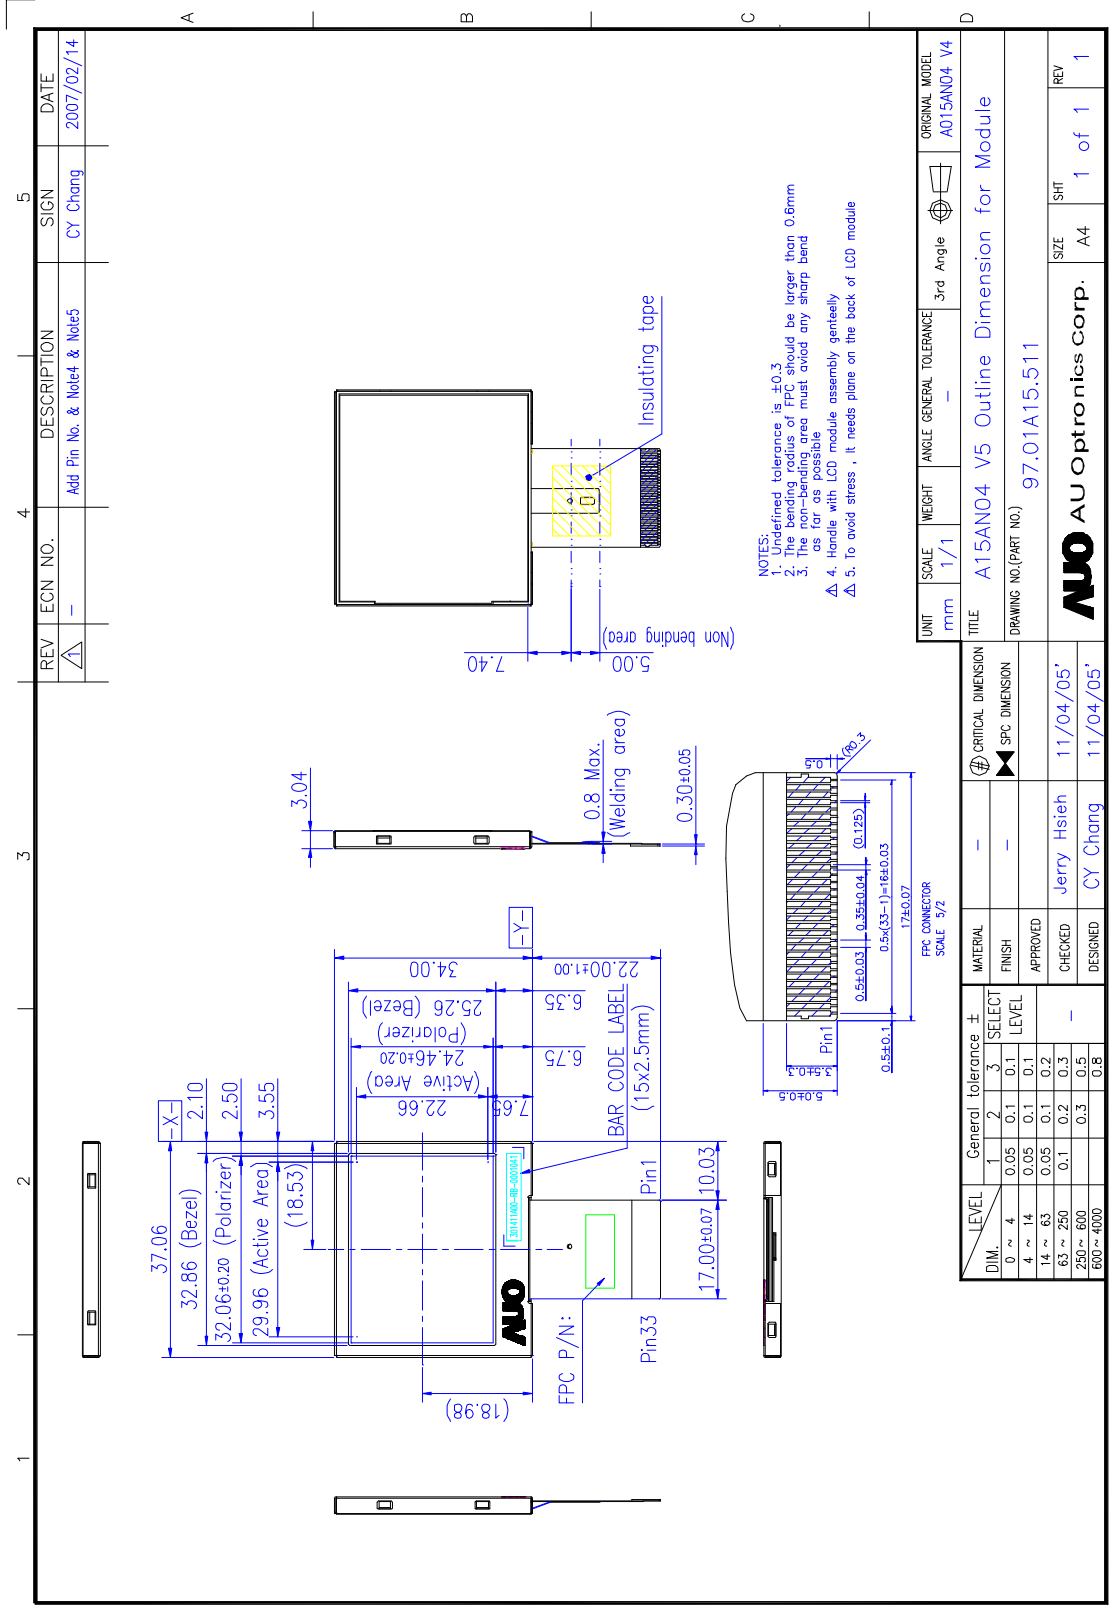
In this document, we list essential parameters for configuration.　Please follow our recommend setting to achieve the best performance.　In the last page, we provide application circuit to drive A015AN05.

For A015AN05 driving circuit design, you just need input one set of power 3.3V, because the charge-pump circuit inside the driver IC produces Vgh & Vgl.　The external peripheral is very simple and good for saving BOM cost for customers.

1. 3-wire serial communication AC timing

Parameter	Symbol	Min.	Typ.	Max.	Unit
Serial clock	Tsck	320	-		ns
SCL pulse duty	Tscw	40	50	60	%
Serial data setup time	Tist	120	-	-	ns
Serial data hold time	Tiht	120	-	-	ns
Serial clock high/low	Tssw	120	-	-	ns
Chip select distinguish	Tcd	1	-	-	us
Time that the CSB to Vsync	Tcv	1	-	-	us

2. The configuration of serial data at SDA terminal is at below

MSB　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　LSB

D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Register address				DATA											

3. Recommend register table for UPS051 timing

"X" =>Don't care

No.	Description	Address															
		D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0

R0	Scan direction	0	0	0	0	0	X	X	X	X	X	X	X	X	X	0	1
R1	Data setting	0	0	1	0	0	X	X	X	X	X	X	X	X	X	0	0
R2	Source IC setting	0	1	0	0	0	X	X	X	X	X	X	X	1	1	0	0
R3	Timing select	0	1	1	0	0	X	X	X	X	X	X	X	X	0	0	0
R4	VCAC level setting	1	0	0	0	0	X	X	X	X	X	X	X	X	1	1	0
R5	HBLK setting	1	0	1	0	0	X	X	X	X	X	X	X	X	X	0	0

4. Recommend register table for UPS052 timing

No.	Description	Address															
		D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R0	Scan direction	0	0	0	0	0	X	X	X	X	X	X	X	X	X	0	1
R1	Data setting	0	0	1	0	0	X	X	X	X	X	X	X	X	X	0	1
R2	Source IC setting	0	1	0	0	0	X	X	X	X	X	X	X	1	1	0	0
R3	Timing select	0	1	1	0	0	X	X	X	X	X	X	X	X	0	0	1
R4	VCAC level setting	1	0	0	0	0	X	X	X	X	X	X	X	X	1	1	0
R5	HBLK setting	1	0	1	0	0	X	X	X	X	X	X	X	X	X	0	0

"X"=>Don't care

5. Register detail description

a. Register R0

Bit	Function
D0	Up/down scan direction: "0" => Down to up "1" => Up to down
D1	Left/Right scan direction: "0" => Left to right "1" =>Right to left

b. Register R1

Bit	Function
D0	"0" =>When UPS051 mode selected "1" =>When UPS052 mode selected
D1	Always fixed at "0"

c. Register R2

Bit	Function
D0	Always fixed at "0"
D1	Always fixed at "0"
D2	Standby mode setting: "0" => Turn off driver & DCDC "1" => Normal operating
D3	Global reset setting: "0" =>Driver control register is in reset state, all setting to default value. "1" =>Normal operating;

d. Register R3

Bit	Function
D0	"0" => To select UPS051 timing "1" => To select UPS052 timing
D1	Always fixed at "0"
D2	Always fixed at "0"

e. Register R4 ✻

Bit	Function
D0	Always fixed at "0"
D1	Always fixed at "1"
D2	Always fixed at "1"

✻ Set VCOM AC level = 5.6V (Amplitude)

f. Register R5

Bit	Function			
	Select the horizontal input delay timing			
	DL1	DL0	NO.	Level
D1~D0	0	0	+0	
	0	1	-1	Unit:
	1	0	+1	DCLK
	1	1	+2	

Suggested reference application circuit

(1) Internal LED booster circuit

    The integrated driver IC provides build-in LED booster controller, DC-DC charge pump, and VCOM driver. See Fig. 8 for the application circuit. The recommended capacitance values of the external capacitor please refer to page 5. The capacitors of 411 will be used shrinkage IC.

Fig. 8 Typical Application Circuit

Note:

    C25 & R12 are new adding external components.

    C25 => to stable the AVDD power

    R12 => used for discharge AVDD power faster

    Q2 ➔ to control backlight on/off function

    EXTERNAL-SWITCH1 "H" ➔ backlight on

    EXTERNAL-SWITCH1 "L" ➔ backlight off

    Please refer to suggestion power and standby on/off sequence.

External LED circuit

Fig. 9 External LED driver Circuit

Note:

Q1 ➔ to control backlight on/off function

EXTERNAL-SWITCH2 "H" ➔ backlight on

EXTERNAL-SWITCH2 "L" ➔ backlight off

Please refer to suggestion power and standby on/off sequence.

Power supply VCC (typical 3.3V) and AVDD (typical 3.3V) are required to provide driver IC power and generate all necessary voltages for LCD related circuits.

We recommend the external LED driver circuit provide a constant 25mA for LED backlight unit.We suggest the R501 resister value is greater than 30 ohm to turn off DRV signal.The capacitors of C510 will be used shrinkage IC.

Suggestion power on/off sequence

(1) Internal LED booster circuit

(2) External LED circuit

We recommend power on/off sequence that base on differential application circuit to make sure power on/off function can work successfully in every time power on.
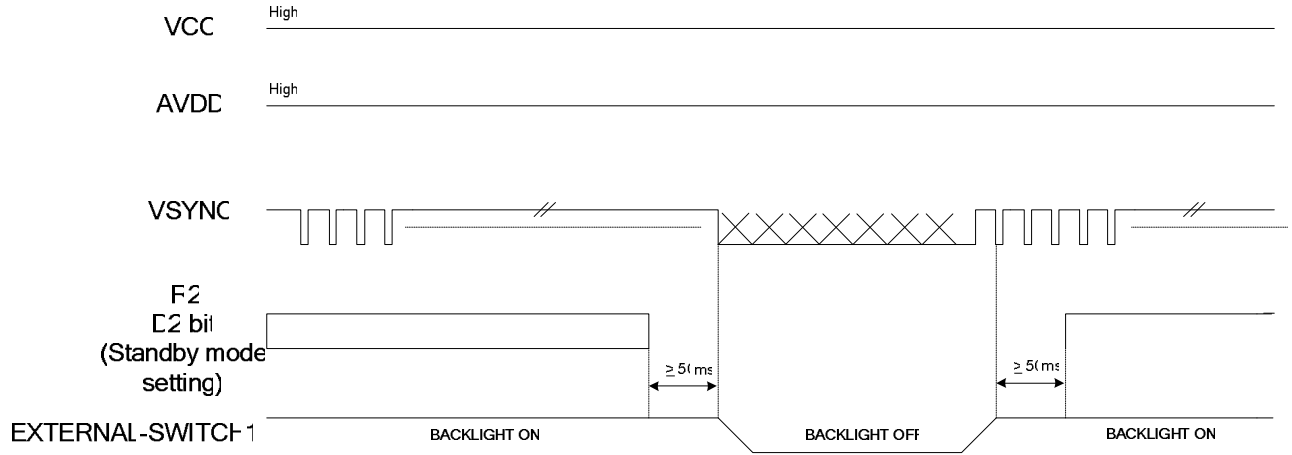
Note: In standby mode, VSYNC signal will don't care, but we suggestion VSYNC is disable.

Suggestion Standby on/off sequence

(1) Internal LED booster circuit

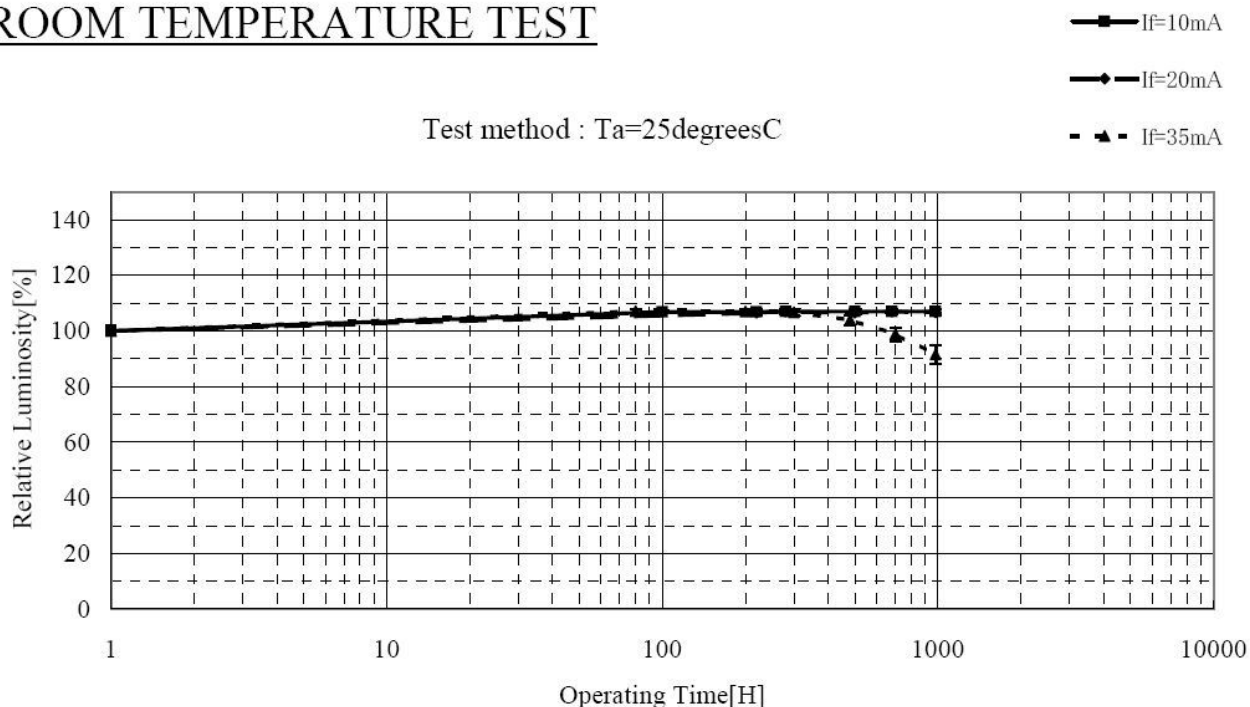Note: xx means don't care this signal.

(2) External LED circuit
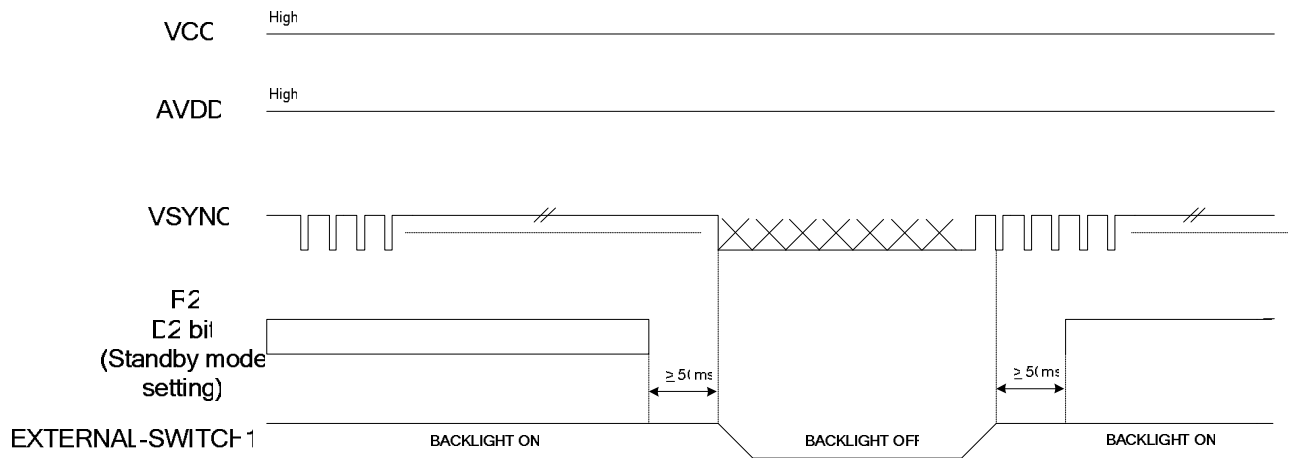
Note: xx means don't care this signal.

We recommend standby on/off sequence that base on differential application circuit to make sure function can work successfully.
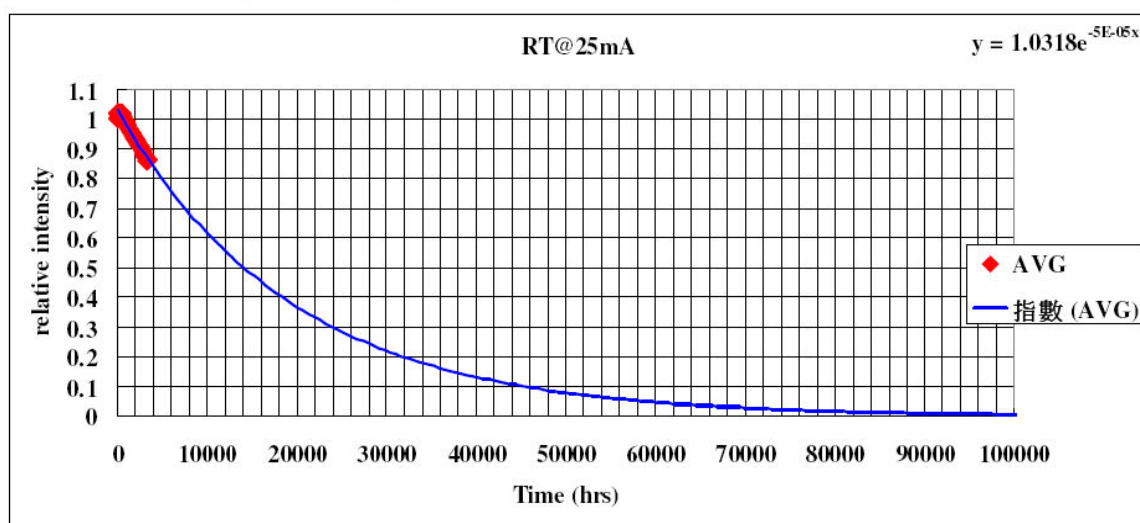
I. Appendix – LED life time data

NSSW020B-P1 WHITE LED Life Data

ROOM TEMPERATURE TEST

Test method : Ta=25degreesC

- ■— If=10mA
- ◆— If=20mA
- ▲- If=35mA

LS-11048C1 White Light LED

2.2.2 Room Temperature Operation Life Test (25 °C, 25mA)

$y = 1.0318e^{-5E-05x}$

RT@25mA

◆ AVG

── 指數 (AVG)

The function of prediction curve is $I(t) = 1.0318e^{-5.1495E-05t}$
According the prediction curve function, the brightness intensity will decay 50% after 14068 hours.