

To : _____

Specification of FUJITSU TFT-LCD module

FLC51UXC8V

Approval
 Date : By :

This Product is designed, developed and manufactured as contemplated for general use, including without limitation, general office use, personal use, household use, and ordinary industrial use, but is not designed, developed and manufactured as contemplated for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could lead directly to death, personal injury, severe physical damage or other loss (hereinafter "High Safety Required Use"), including without limitation, nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system. If customer's product possibly falls under the category of High Safety Required Use, please consult with our sales representatives in charge before such use. In addition, Fujitsu shall not be liable against the Customer and/or any third party for any claims or damages arising in connection with the High Safety Required Use of the Product without permission.

Specification No. : Tech Bes LCD-00108

Issue Date : August 14, 2002

Issued by :



K. Tanaka

Director

Design Dep.

Technology Div.

FUJITSU DISPLAY TECHNOLOGIES CORPORATION

A

B

C

D

E

F

						TITLE FLC51UXC8V								
04	20020814	Furukoshi		K.Tanaka	Revised P2,8,15,30-36							DRAW. NO. Tech Bes LCD-00108	CUST.	
03	20020626	Furukoshi		K.Tanaka	Add 02B, Revised P12,17,22,32									
02	20020227	Furukoshi	K.Tanaka		Change P2,6,15,18,22-33									
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION							FUJITSU DISPLAY TECHNOLOGIES CORPORATION		Sheet 1 / 36
	DESIG.	20020218	Furukoshi	CHECK			APPR.	K Tanaka						

TABLE OF CONTENTS

1 . APPLICATIONS	3
2 . PRODUCT NAME AND MODEL NUMBER	3
2-1.Product Names	3
2-2.Model Numbers	3
3 . OVERVIEW	3
4 . CONFIGURATION	3
5 . MECHANICAL SPECIFICATIONS	4
6 . ABSOLUTE MAXIMUM RATING	5
7 . RECOMMENDED OPERATING CONDITIONS	5
8 . ELECTRICAL SPECIFICATIONS	6
9 . OPTICAL SPECIFICATIONS	8
10 . INTERFACE SPECIFICATIONS	12
10-1.Signal Descriptions	12
10-2.LVDS Data Assignment	13
10-3. Color Data Assignment	14
10-4. Input Signal Timing	15
10-5. Correspondence between Data and Display Position	17
10-6.Power Supply Sequence	17
11 . BACK-LIGHT SPECIFICATIONS	18
11-1.Pin configurations for Back-light	18
11-2.CCFL	18
11-3.Life	18
12 . APPEARANCE SPECIFICATIONS	19
12-1.Appearance	19
12-2.Dot defects	20
13 . ENVIRONMENTAL SPECIFICATIONS	21
14 . INDICATIONS	22
15 . PACKAGING	22
15-1.Packing Specifications	22
15-2.Packing Method	②23
16 . WARRANTY	②27
17 . PRECAUTIONS	②27
18 . OTHERS	④33

DATE	DOCUMENT CONTROL SECTION

						TITLE FLC51UXC8V							
04	20020814				Change contents page number	DRAW. NO. Tech Bes LCD-00108						CUST.	
02	20020227				Change contents page number								
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					FUJITSU DISPLAY TECHNOLOGIES CORPORATION		SHEET	2 /
	DESIG.			CHECK			APPR.						

		1		2		3		4			
A	1. APPLICATION This specification is applied to the 20.1-inch UXGA supported TFT-LCD module.										A
	2. PRODUCT NAME AND MODEL NUMBER <u>2-1 Product Name:</u> LCD Module <u>2-2 Model Name:</u> FLC51UXC8V										
B	3. OVERVIEW This LCD module has a TFT active matrix type liquid crystal panel 1600x1200 pixels, and diagonal size of 51cm(20.1-inch). This LCD has a LVDS dual interface and can display 16,777,216 colors. The power supply of this LCD module is +12V DC single. This module has the characteristics for applying TCO'99.										B
	4. CONFIGURATION This LCD module consists of a color TFT-LCD panel that is mounted with TFT driver ICs, a cold-cathode fluorescent tube back-light. The inverter for the backlight is included. Figure 4-1 shows a block diagram of this LCD module.										
C											C
D											D
E											E
F											F
DATE		DOCUMENT CONTROL SECTION				TITLE		FLC51UXC8V			
						DRAW. NO.		Tech Bes LCD-00108			
								CUST.			
EDIT		DATE		DESIG.		CHECK		APPR.			
DESIG.				CHECK				APPR.			
1											

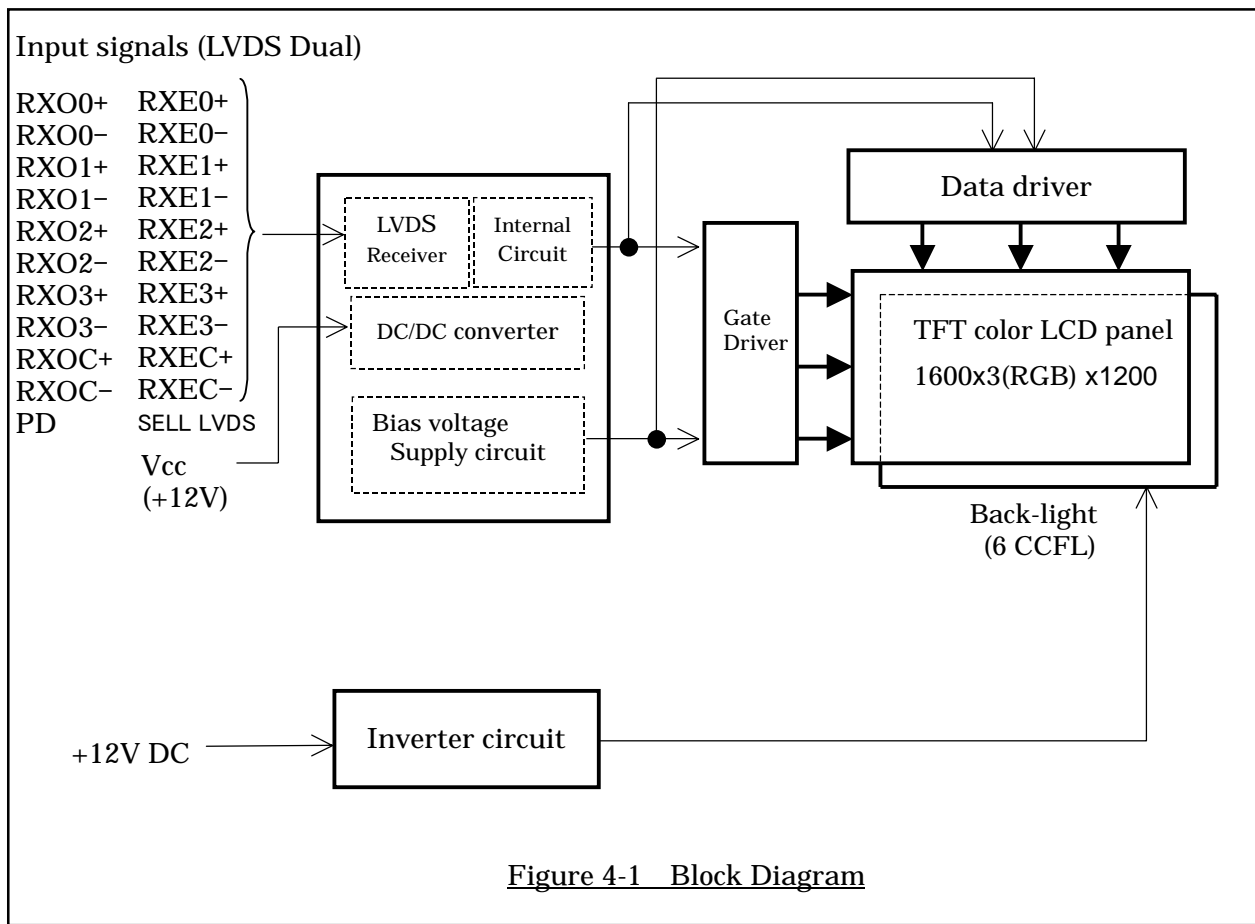


Figure 4-1 Block Diagram

5. MECHANICAL SPECIFICATIONS

Table 5-1 shows the mechanical specifications of this LCD module.

Table 5-1 Mechanical Specifications

Item	Specifications	Unit	Remark
Dimensions	456x356x30.9(TYP.)	mm	Edge type back-light is used. (ϕ 2.6 CCFLx6) Include inverter. For details on dimensions, See dimensional outline drawing. (At page 27,28,29: Figure 19-1,2,3) Excluding inverter.
Display Resolution	(1600x3) x1200	—	
Display Dot Area	408.0x306.0	mm	
Dot Pitch	(0.085x3)x0.255	mm	
Aspect Ratio	1:1	—	
Weight	3,700 (Typ)	g	
FG-SG	Short circuit	—	

DOCUMENT CONTROL SECTION

DATE

						TITLE	FLC51UXC8V		
						DRAW. NO.	Tech Bes LCD-00108		
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		
	DESIG.			CHECK		APPR.			4/

6. ABSOLUTE MAXIMUM RATING

Table 6-1 shows the absolute maximum rating of this LCD module.

Table 6-1 Absolute Maximum Rating

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{CC}	Ta=25°C	−0.3	—	14.0	V
	V _{INV}	Ta=25°C	−0.3	—	14.0	V
Input Signal Voltage (LVDS signal, PD, SELL LVDS)	V _{IN}	Ta=25°C	−0.3	—	3.6	V
Control Voltage	V _{CNT}	Ta=25°C	−0.3	—	V _{INV}	V
Brightness Control Voltage	V _{VR4}	Ta=25°C	0	—	4.0	V

7. RECOMMENDED OPERATING CONDITIONS

Table 7-1 shows the recommended operating conditions of this LCD module.

Table 7-1 Recommended Operating Conditions

Item		Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage (Logic)		V_{CC}	11.5	12.0	12.5	V
Supply Voltage (Inverter)		V_{INV}	10.8	12.0	13.2	V
Ripple Voltage	V_{CC}	V_{RP}	—	—	0.1	V

A



E

C

C



C

E



Figure 8-2(B) Equivalent circuit of power supply

TITLE			FLC51UXC8V		
DRAW. NO.					CUST.
Tech Bes LCD-00108					
FUJITSU DISPLAY TECHNOLOGIES CORPORATION				SHARP	7/

1		2		3		4				
9. OPTICAL SPECIFICATIONS										
Table 9-1 shows the optical specifications of this LCD module.										
Table 9-1 Optical Specifications										
Ta=25℃										
Item		Symbol	Condition		Specifications			Unit	Remark	
					MIN.	TYP.	MAX.		Note	
Visual Angle	Horizontal	$\theta_{L,R}$	CR≥10	$\theta_{U,D}=0^{\circ}$	85	—	—	deg		(1)(2) (3)(5) (6)
	Vertical	$\theta_{U,D}$		$\theta_{L,R}=0^{\circ}$	85	—	—	deg		
	All Direction	θ			—	80	—	deg		
Contrast Ratio		CR	$\theta_{L,R,U,D}=0^{\circ}$		④350	④600	—	—	White/Black	(1)(2) (3)(5)
Response Time (ON) (B→W)		t_{on}	$\theta_{L,R,U,D}=0^{\circ}$	Ta=25℃	—	15	30	ms		(1) (4) (5)
				Ta=0℃	—	50	100	ms		
Response Time (OFF) (W→B)		t_{off}	$\theta_{L,R,U,D}=0^{\circ}$	Ta=25℃	—	10	25	ms		
				Ta=0℃	—	50	100	ms		
Response ②Time (ON or OFF) (All gray scale)		t_{avg}	$\theta_{L,R,U,D}=0^{\circ}$	Ta=25℃ ②50±3Hz 60±3Hz	—	15	—	ms	Average of Response Time	
Brightness		I	$\theta_{L,R,U,D}=0^{\circ}$ V _{CC} =12.0V V _{INV} =12.0V (At maximum Brightness)		200	250		cd/m ²	White*1	(1)(5)
Brightness Uniformity		△I			70	—	—	%		(1)(5) (7)
Chromaticity	W	x			0.283	0.313	0.343	—		(1) (5)
		y			0.299	0.329	0.359	—		
	R G B	(x, y)			Red	(0.647,0.346) Typ.				
Green			(0.298,0.591) Typ.							
Blue			(0.150,0.118) Typ.							
LCD Panel Type					TFT Color					
Display Mode					Normally Black					
Wide Viewing Angle Technology					MVA					
Optimum Viewing Angle					— (Symmetry)				(6)	
Display Color					16,777,216 (8-bit color)					
Color of non-display area					Black					
Surface Treatment					Anti-glare (Haze value: (25%) , 2H)					
(*1) Value at 15~20 minutes after lighting on.										
(Note) •CS-1000 (MINOLTA Co. Ltd.) , BM-5A (Topcon) and the like should be used as a luminance colorimeter.										
Field=1° , L=500mm										
•Back-light current = 6mA, Dark room condition (1 lux or less)										
					TITLE FLC51UXC8V					
					DRAW. NO.					
					Tech Bes LCD-00108					
					CUST.					
04 20020814					Change Contrast Ratio.					
02 20020227					Change Table 9-1.					
EDIT DATE DESIG. CHECK APPR.					DESCRIPTION					
DESIG.					FUJITSU DISPLAY TECHNOLOGIES CORPORATION					
1					8 /					

Note 1) Definition of Viewing Angle (1)

Based on Figure 9-1.

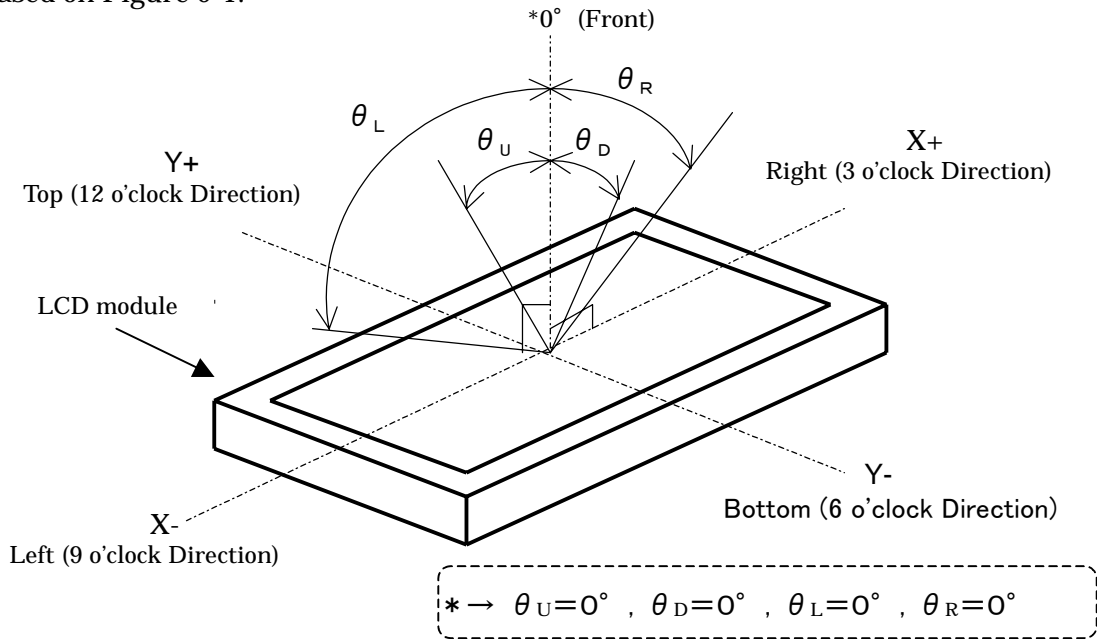


Figure 9-1 Definition of Viewing Angle (1)

Note 2) Definition of Viewing Angle (2)

Based on Figure 9-2.

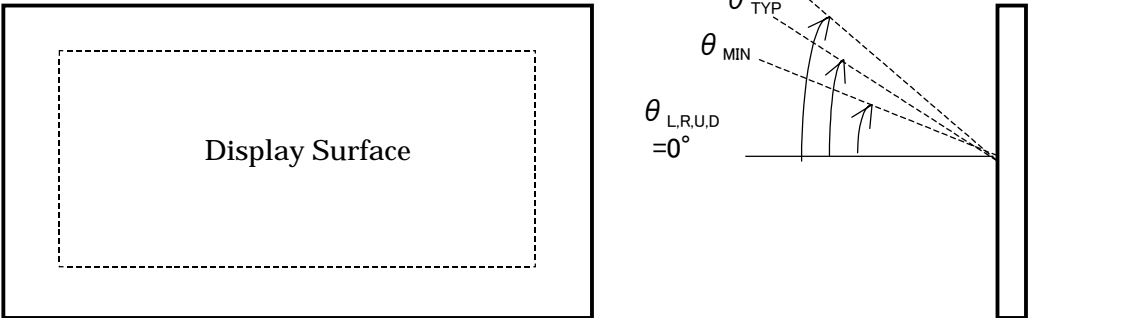


Figure 9-2 Definition of Viewing Angle (2)

Note 3) Definition of Contrast Ratio (CR)

Determined by Formula (1) based on Figure 9-3 Voltage-Brightness characteristics.

$$= \frac{L_W \text{ (Brightness at white)}}{L_B \text{ (Brightness at black)}} \cdots \cdots (1)$$

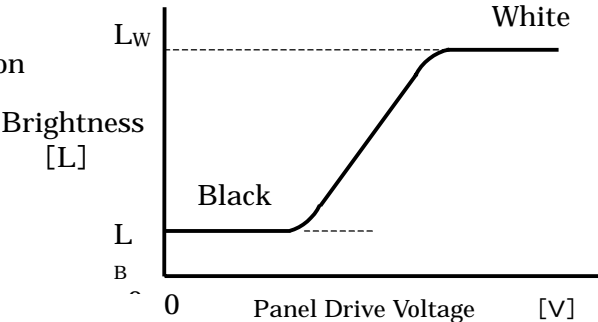
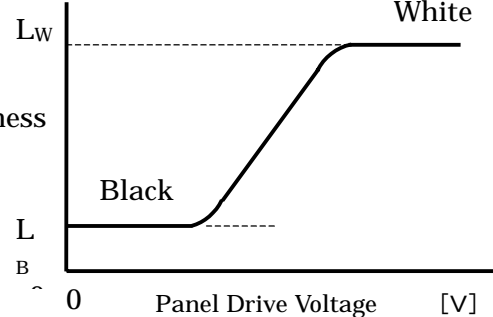


Figure 9-3 Voltage-Brightness Characteristics

DOCUMENT CONTROL SECTION	<u>Note 3) Definition of Contrast Ratio (CR)</u> Determined by Formula (1) based on Figure 9-3 Voltage-Brightness characteristics.									
	$= \frac{L_W \text{ (Brightness at white)}}{L_B \text{ (Brightness at black)}} \cdots \cdots (1)$									
	<u>Figure 9-3 Voltage-Brightness Characteristics</u>									

						TITLE FLC51UXC8V			
						DRAW. NO. Tech Bes LCD-00108			CUST.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		
DESIG.			CHECK			APPR.		9 /	

Note 6) Definition of Optimum Viewing Angle

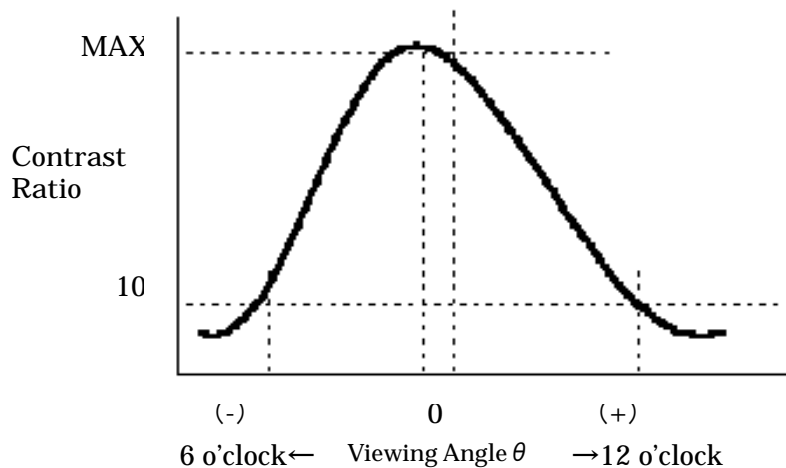



Figure 9-6 Definition of Viewing Angle

Note 7) Definition of Brightness Uniformity

Brightness uniformity is defined by the following formula.

Brightness (I1~I9) are measured at the following 9 points (①~⑨) on the display area that is shown in Figure 9-7.

$$\text{Brightness Uniformity } (\Delta L) = \frac{|\text{Min. In }|}{|\text{Max. In }|} \times 100 (\%) , n = 1 \text{ to } 9$$

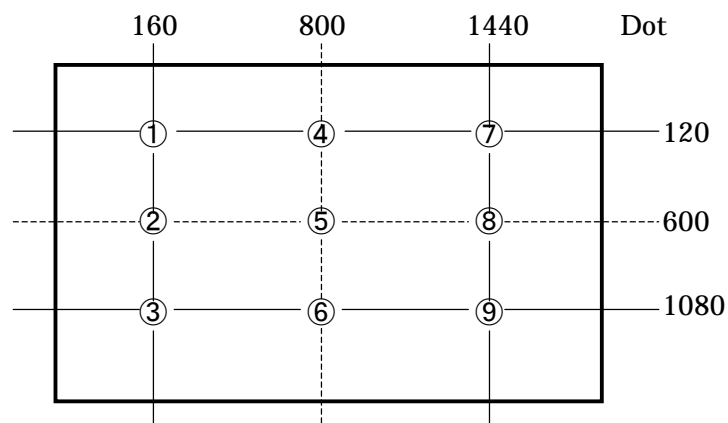

Note) Each measurement point (①~⑨) defines the center spot of view of Brightness Meter. The tolerance of measurement position is $\pm 3\text{mm}$.

Figure 9-7 Measurement Points

DOCUMENT CONTROL SECTION

DATE

						TITLE		FLC51UXC8V	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00108			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		11/	
DESIG.			CHECK		APPR.				

10-1 Signal descriptions

Table 10-1 Interface signals (CN1)

Pin No.	Symbol	I/O	Function
1	RxO0-	I	Negative differential input
2	RxO0+	I	Positive differential input
3	RxO1-	I	Negative differential input
4	RxO1+	I	Positive differential input
5	RxO2-	I	Negative differential input
6	RxO2+	I	Positive differential input
7	GND	—	Ground
8	RxOC-	I	Negative differential input
9	RxOC+	I	Positive differential input
10	RxO3-	I	Negative differential input
11	RxO3+	I	Positive differential input
12	RxE0-	I	Negative differential input
13	RxE0+	I	Positive differential input
14	GND	—	Ground
15	RxE1-	I	Negative differential input
16	RxE1+	I	Positive differential input
17	GND	—	Ground
18	RxE2-	I	Negative differential input
19	RxE2+	I	Positive differential input
20	RxEC-	I	Negative differential input
21	RxEC+	I	Positive differential input
22	RxE3-	I	Negative differential input
23	RxE3+	I	Positive differential input
24	GND	—	Ground
25	SELL LVDS	③I	Select LVDS data order *1
26	PD	I	LVDS Core Power Down
27	TST	—	Test pin *2
28	Vcc	—	+12V power supply
29	Vcc	—	+12V power supply
30	Vcc	—	+12V power supply

FI-X30C

*2: Keep open. (Internal test use only.)

						TITLE FLC51UXC8V												
						DRAW. NO. Tech Bes LCD-00108										CUST.		
03	20020626				Change Table 10-1.													
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION										FUJITSU DISPLAY TECHNOLOGIES CORPORATION	Sheet 12/		
	DESIG.			CHECK			APPR.											

1					2		3			4		
10-2 LVDS Data Assignment												
Table 10-2 shows the LVDS Data Assignment.												
Table 10-2 LVDS Data Assignment												
A	Input signal *1			Transmitter DS90CF383,C385		Interface connector			Receiver DS90CF386		LCD input (Sell LVDS)	
	SELL LVDS	Low	High	pin	INPUT	System side	LCD module		pin	OUTPUT	Low	High
							pin					
B	LVDS Odd	RO2	RO0	51	TxIN0	Tx OUT0+	2	RxO0+	27	RxOUT0	RO2	RO0
		RO3	RO1	52	TxIN1				29	RxOUT1	RO3	RO1
		RO4	RO2	54	TxIN2				30	RxOUT2	RO4	RO2
		RO5	RO3	55	TxIN3				32	RxOUT3	RO5	RO3
		RO6	RO4	56	TxIN4	Tx OUT0-	1	RxO0-	33	RxOUT4	RO6	RO4
		RO7	RO5	3	TxIN6				35	RxOUT6	RO7	RO5
		GO2	GO0	4	TxIN7				37	RxOUT7	GO2	GO0
		GO3	GO1	6	TxIN8				38	RxOUT8	GO3	GO1
		GO4	GO2	7	TxIN9	Tx OUT1+	4	RxO1+	39	RxOUT9	GO4	GO2
		GO5	GO3	11	TxIN12				43	RxOUT12	GO5	GO3
		GO6	GO4	12	TxIN13				45	RxOUT13	GO6	GO4
		GO7	GO5	14	TxIN14				46	RxOUT14	GO7	GO5
		BO2	BO0	15	TxIN15	Tx OUT1-	3	RxO1-	47	RxOUT15	BO2	BO0
		BO3	BO1	19	TxIN18				51	RxOUT18	BO3	BO1
		BO4	BO2	20	TxIN19				53	RxOUT19	BO4	BO2
		BO5	BO3	22	TxIN20				54	RxOUT20	BO5	BO3
		BO6	BO4	23	TxIN21	Tx OUT2+	6	RxO2+	55	RxOUT21	BO6	BO4
		BO7	BO5	24	TxIN22				1	RxOUT22	BO7	BO5
		RSVD	RSVD	27	TxIN24				3	RxOUT24	Not use	Not use
		RSVD	RSVD	28	TxIN25				5	RxOUT25	Not use	Not use
		ENAB	ENAB	30	TxIN26	Tx OUT2-	5	RxO2-	6	RxOUT26	ENAB	ENAB
		RO0	RO6	50	TxIN27				7	RxOUT27	RO0	RO6
		RO1	RO7	2	TxIN5				34	RxOUT5	RO1	RO7
		GO0	GO6	8	TxIN10	Tx OUT3+	11	RxO3+	41	RxOUT1	GO0	GO6
		GO1	GO7	10	TxIN11				42	RxOUT11	GO1	GO7
		BO0	BO6	16	TxIN16				49	RxOUT16	BO0	BO6
		BO1	BO7	18	TxIN17				50	RxOUT17	BO1	BO7
		RSVD	RSVD	25	TxIN23				2	RxOUT23	Not use	Not use
DCLK			31	TxCLK IN	TxCLK OUT+	9	RxCLK IN+	26	RxCLK OUT	DCLK		
					TxCLK OUT-	8	RxCLK IN-					
C	LVDS Even	RE2	RE0	51	TxIN0	Tx OUT0+	13	RxEO+	27	RxOUT0	RE2	RE0
		RE3	RE1	52	TxIN1				29	RxOUT1	RE3	RE1
		RE4	RE2	54	TxIN2				30	RxOUT2	RE4	RE2
		RE5	RE3	55	TxIN3				32	RxOUT3	RE5	RE3
		RE6	RE4	56	TxIN4	Tx OUT0-	12	RxEO-	33	RxOUT4	RE6	RE4
		RE7	RE5	3	TxIN6				35	RxOUT6	RE7	RE5
		GE2	GE0	4	TxIN7				37	RxOUT7	GE2	GE0
		GE3	GE1	6	TxIN8				38	RxOUT8	GE3	GE1
		GE4	GE2	7	TxIN9	Tx OUT1+	16	RxE1+	39	RxOUT9	GE4	GE2
		GE5	GE3	11	TxIN12				43	RxOUT12	GE5	GE3
		GE6	GE4	12	TxIN13				45	RxOUT13	GE6	GE4
		GE7	GE5	14	TxIN14				46	RxOUT14	GE7	GE5
		BE2	BE0	15	TxIN15	Tx OUT1-	15	RxE1-	47	RxOUT15	BE2	BE0
		BE3	BE1	19	TxIN18				51	RxOUT18	BE3	BE1
		BE4	BE2	20	TxIN19				53	RxOUT19	BE4	BE2
		BE5	BE3	22	TxIN20				54	RxOUT20	BE5	BE3
		BE6	BE4	23	TxIN21	Tx OUT2+	19	RxEO2+	55	RxOUT21	BE6	BE4
		BE7	BE5	24	TxIN22				1	RxOUT22	BE7	BE5
		RSVD	RSVD	27	TxIN24				3	RxOUT24	Not use	Not use
		RSVD	RSVD	28	TxIN25				5	RxOUT25	Not use	Not use
		RSVD	RSVD	30	TxIN26	Tx OUT2-	18	RxE2-	6	RxOUT26	Not use	Not use
		RE0	RE6	50	TxIN27				7	RxOUT27	RE0	RE6
		RE1	RE7	2	TxIN5				34	RxOUT5	RE1	RE7
		GE0	GE6	8	TxIN10	Tx OUT3+	23	RxE3+	41	RxOUT10	GE0	GE6
		GE1	GE7	10	TxIN11				42	RxOUT11	GE1	GE7
		BE0	BE6	16	TxIN16				49	RxOUT16	BE0	BE6
		BE1	BE7	18	TxIN17				50	RxOUT17	BE1	BE7
		RSVD	RSVD	25	TxIN23				2	RxOUT23	Not use	Not use
DCLK			31	TxCLK IN	TxCLK OUT+	21	RxCLK IN+	26	RxCLK OUT	Not use		
					TxCLK OUT-	20	RxCLK IN-					
D	LVDS Even											
		*1 ・RSVD (reserved) pin on a transmitter should be connected with Ground.										
・Input odd or even data depending on the display position of the LCD module.												
						TITLE FLC51UXC8V						
						DRAW. NO.						CUST.
						Tech Bes LCD-00108						
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION			FUJITSU DISPLAY TECHNOLOGIES CORPORATION			Sheet 13/	
DESIG.				CHECK			APPR.					
1												

10-3 Color Data Assignment

Table 10-3 shows the Color Data Assignment.

Table 10-3 Color Data Assignment

Color		R Input data								G Input data								B Input data							
	Odd Even	R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Brighter	253	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓	254	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Brighter	253	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	↓	254	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Green	255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	↑	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Brighter	253	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	↓	254	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue	255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note.1) Definition of gray scale:Color (n)···"n" indicates gray scale level.

Larger number means brighter level.

Note.2) Data; 1:High, 0:Low

Note 3) Color data consist of 8 bit red, green and blue data of odd and even number pixel data.
Total data number is 48 signals. This module is able to display 16,777,216 colors because each red, green and blue data is controlled independently.

DOCUMENT CONTROL SECTION

DATE

TITLE

FLC51UXC8V

DRAW. NO.

Tech Bes LCD-00108

CUST.

EDIT

DATE

DESIG.

CHECK

APPR.

DESCRIPTION

FUJITSU DISPLAY TECHNOLOGIES CORPORATION

14/

DESIG.

CHECK

APPR.

1		2		3		4	
10-4 Input Signal Timing							
Table 10-4 and Figure 10-1 shows the Input Signal Timing at LVDS transmitter.							
Table 10-4 Timing Characteristics				(Ta=0~45°C, Vcc=12±0.5V)			
Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK signal (Clock)	Period	Tc	11.765	12.345	20.000	ns	
	Frequency	1/Tc	50.000	81.000	85.000	MHz	
	Duty	Tch/Tc	45	50	55	%	
	High time	TclkH	3.5	—	—	ns	
	Low time	TclkL	3.5	—	—	ns	
DCLK-Data Timing	Setup time	Tset	3	—	—	ns	
	Hold time	Thold	2	—	—	ns	
ENAB signal	Horizontal Period	Th	④865*1	1080	1130*1	DCLK	
	Hor. Period	Th	13.0	13.3	14.65	μs	
	Hor. Display period	Thd	800	800	800	DCLK	*2
	Vertical Period	Tv	1207*1	1250	1280*1	Th	
	②Ver. Frequency	1/Tv	47	60	62	Hz	
		1/Tv	47	50	53	Hz	*4
		1/Tv	57	60	62	Hz	*4
Ver. Display period	Tvd	1200	1200	1200	Th		
Data-ENAB timing	Tdn	—	0	—	DCLK	*3	
<p>*1)•horizontal display position is specified by the rise of ENAB. The data latched at falling edge of DCLK after rise of ENAB is displayed at the left edge of the display area.</p> <p>•Vertical display position is specified by the rise of ENAB after low level continuation over 5500 DCLK. The data latched at the rise of ENAB is displayed at the top line of the display area.</p> <p>*2)•If the “High” level period of ENAB is less than 800 DCLK, black color is displayed at the rest of the display area.</p> <p>*3)•If ENAB does not synchronize with the effective display data, the display position does not fit to the display area.</p> <p>②*4)• Response time compensation circuit in LCD works at between 47Hz to 53Hz and 57Hz to 62Hz.</p>							
DOCUMENT CONTROL SECTION							
DATE							
						TITLE FLC51UXC8V	
04	20020814			Change Table 10-4 Horizontal Period		DRAW. NO.	
02	20020227			Change Table 10-4, Add note4.		Tech Bes LCD-00108	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		FUJITSU DISPLAY TECHNOLOGIES CORPORATION
DESIG.				CHECK			15/
1							

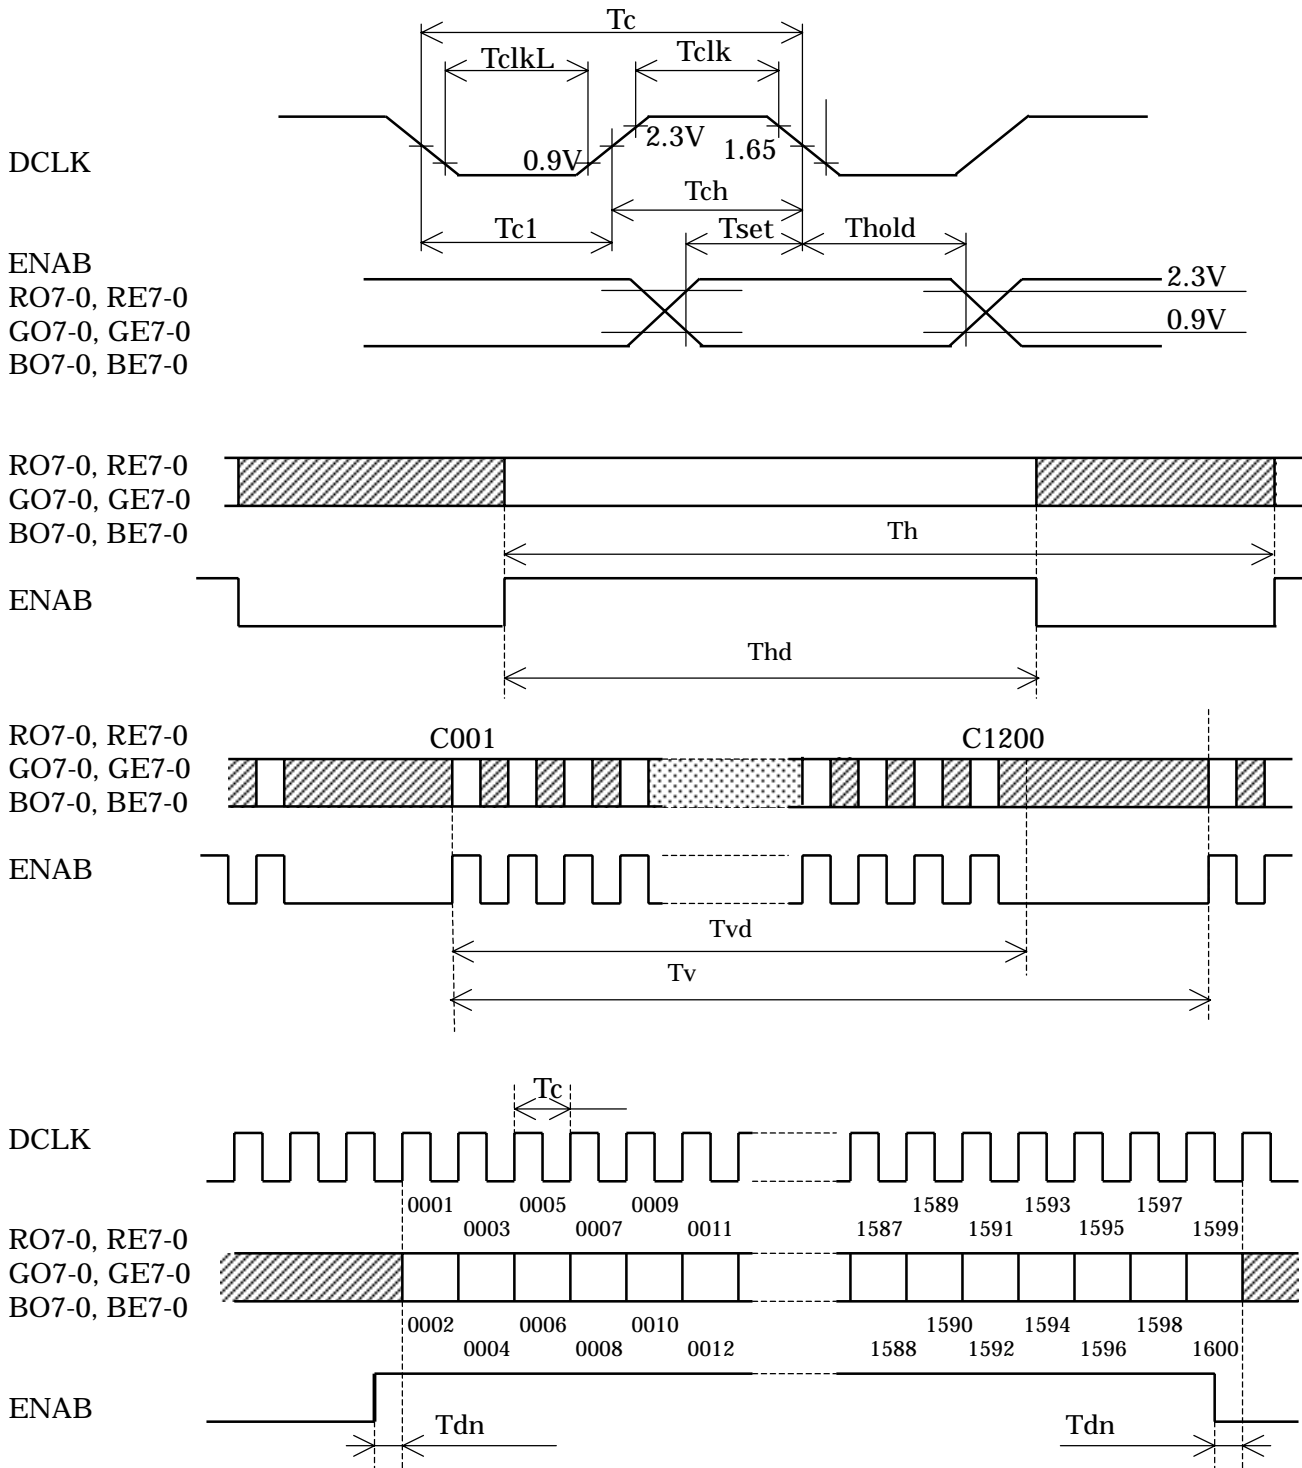


Figure 10-1 Input Signal Timing Chart

						TITLE		FLC51UXC8V	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00108			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		16/	
DESIG.			CHECK		APPR.				

10-4 Correspondence between Data and Display Position

Figure 10-2 shows the Correspondence between Data and Display Position.

	S0001	S0002	S0003	S0004	S0005	S0006	S0007	-----	S4799	S4800	
C001	RO 0001	GO 0001	BO 0001	RE 0002	GE 0002	BE 0002	RO 0003	GO 0003		GE 1600	BE 1600
C1200	RO 0001	GO 0001	BO 0001	RE 0002	GE 0002	BE 0002	RO 0003	GO 0003		GE 1600	BE 1600

Figure 10-2 Correspondence Data and Display Position

10-5 Power Supply Sequence

The sequence of input signals and On/Off of the power supply of this LCD module should be in the specification shown in Figure 10-3 to prevent latch-up of the driver ICs and DC driving of the LCD panel.

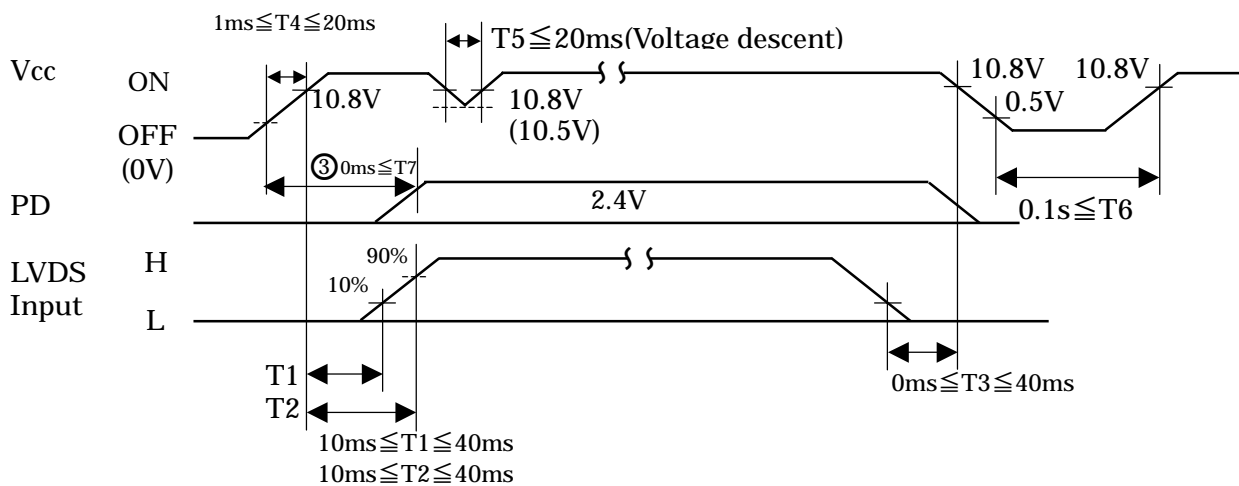


Figure 10-3 Power Supply Sequence(Logic)

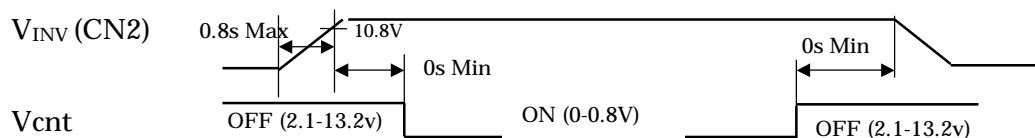


Figure 10-4 Power Supply Sequence(Inverter)

						TITLE	FLC51UXC8V			
						DRAW. NO.				
						Tech Bes LCD-00108				CUST.
03	20020626				Change Figure 10-3.					
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION				17/
DESIG.				CHECK		APPR.				

11. BACK-LIGHT SPECIFICATIONS

11-1 Pin configuration for Back-light

Table 11-1 shows the description and Pin assignment of the connectors (CN-2) for the Back-light of this LCD module.

Table 11-1 Pin Assignment of CN-2

Pin No.	Signal	Function
1	V _{INV}	Power supply
2	V _{INV}	Power supply
3	V _{INV}	Power supply
4	V _{INV}	Power supply
5	GND	Ground (High voltage)
6	GND	Ground (High voltage)
7	GND	Ground (High voltage)
8	GND	Ground (High voltage)
9	V _{cnt}	Lighting control
10	GND	Ground
11	V _{VR4}	Brightness control
12	NC	N.C.

Connector: 53261-1290

User's Connector: 51021-1200

Supplier: Molex-Japan Co.Ltd.

Note1) N.C terminal should keep open.

Note2) V_{VR4} input:
0V=Max. Brightness
3.5V=Min. brightness

Note3) V_{cnt} input:
0V=BL turn on
2.1V or more = BL turn off

Note4) Keep the circuit GND (10pin) apart from high-voltage GND (5-8pin). Otherwise, the screen may cause flickering.

11-2 CCFL

②Supplier:SANKEN ELECTRIC CO.,LTD Part No. SS26E4360E8550C3042940

11-3 Life

The life of the back-light is a minimum of 50,000 hours at the following conditions.

(1) Working conditions

- ①Ambient temperature: $25 \pm 5^{\circ}\text{C}$
- ②Brightness control (V_{vr4}): 0V

(2) Definition of life

- ①Brightness becomes 50% or less than the minimum brightness value shown in Table 9-1.
- ②The lamp no longer lights
- ③Lamp being flashing or flickering.

11-4 Lamp assembly set (for replacement)

Lamp assembly set (with charge) is prepared for replacing old lamp to new one. This set consists of an upper lamp assembly and a lower lamp assembly.

Type number:

DOCUMENT CONTROL SECTION

DATE

										TITLE	FLC51UXC8V
										DRAW. NO.	Tech Bes LCD-00108
										CUST.	
02	20020227									Change 11-2.	
EDIT	DATE	DESIG.	CHECK	APPR.						DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION
											18/

12. APPEARANCE SPECIFICATIONS

12-1.Appearance

Table 12-1 shows the appearance specifications. In the case of another agreement about Specification arises, that agreement takes priority.

Table 12-1 Appearance Specifications

Length: L[mm], Width: W[mm]

Allowable number of pieces: N, Average diameter: D [mm]

	Item			Judgment method and standard		Remarks
1	Foreign Particle	White and Black points		D 0.5 0.5 < D	N 10 N 0	
		Fiber	Dark line	W 0.1 L 12.0	N 10	
			Bright points	D 0.3 0.3 < D 0.6 D> 0.6	Not count N 12 N 8	
2	Scratch	Scratch on polarizer film		12.0 > L	N 15	
3	Dent	Dent on polarizer film		D 0.3 0.3 < D 0.4	Not count N 15	

Note

- Foreign particle and scratch that do not effect display image, such as foreign particle between glass and polarizer film out of the display area, scratch on metal bezel, backlight module or polarizer film out of the display area are not counted.
- Unwiped dirt out of the display area is not counted.
- These items are applied to the defects in the cell when backlight is on, and defects on the surface of the polarizer film at the display area.
- Must be observed the LCD screen from the normal direction unless specified. The distance between the LCD screen and the observing position should be 35cm or more.
One 20W fluorescent lamp is used at 50cm above the worktable.
At this time, the luminance at the vertical direction to the fluorescent lamp is 300 to 600 lux (reference value).
- Appearance Specifications are defined under the condition of frame frequency at 60Hz. (include Bright and Dark points specifications)

12-2.Dot defects (Bright spots, Dark spots)

12-2-1.Area to be inspected

Inside display dot area (408.0 X 306.0mm)
Display dot area means active area.
One pixel consists of 3 dots (red, green and blue).

12-2-2.Bright spots definition

(1) Bright spots are classified as follows. (based on brightness samples)

- Visible through 2% ND filter High-bright spot (R,G)
- Visible through 5% but invisible through 2% ND filter Low-bright spot(R,G,B)
- Invisible through 5% ND filter Not counted

						TITLE		FLC51UXC8V	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00108			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		19/

	1	2	3	4
--	---	---	---	---

A

(2) Tears, breaks, etc in color filter visible by the light passing through.

- Bigger than a half dot.....High bright spot
- A half dot or smallerNot counted

(3) Tears, breaks, etc in black matrix visible by the light passing through.

- Diameter above 50 μ mHigh-bright spot
- Diameter of 50 μ m or smaller.....Not counted

12-2-3. Number of bright spot standard

Item	Entire Screen	
Brightness classification	High-bright spots	High and Low Bright Spots
Number of defects	15 or less	22 or less

NOTES :

- 1.Display should be all black when bright spots are counted.
- 2.Number of two high Bright spots connections is up to 3.
- 3.Number of two low Bright spots connections is up to 12.
- 4.Number of three Bright spots connections and two high Bright spots vertical connections is 0.
- 5.Number of high Bright spots and low Bright spots connections is up to 5.

12-2-4. Distance between Bright spots

- Distance between Bright spots(not include B).....15 mm or more
- Distance between Bright spots(include B)..... 5 mm or more
(Distance to the third defect should be 20mm or more)

12-2-5. Number of Dark spots standard

Item	Entire Screen
Number of defects	24 or less
Number of two dark spot connections	12 or less (Not include vertical, horizontal and diagonal connections)
Number of three dark spot connections	3 or less

NOTES :

1. Display should be all white when dark spot is counted.
2. Distance between defects is 5 mm or more.
(Distance to the third defect should be 20mm or more)
3. If dark spot size is smaller than one dot, convert with following rule and sum up.

(a) A < 1 / 3 : Not counted.

(b) 1 / 3 A < 2 / 3 : Considered as 0.5 dot.

(c) 2 / 3 A : Considered as 1 dot.

(A= Dark spot size / dot size)

A

B

B

C

C

D

D

E

E

F

						TITLE		FLC51UXC8V	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00108			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		20/	
DESIG.			CHECK		APPR.				

F

1

13. ENVIRONMENTAL SPECIFICATIONS

Table 13-1 show the environmental specifications.

Table 13-1 Environmental specifications

Item	Condition		Remark
Temperature	Operation	0~45°C	Temperature on surface of LCD panel (display area.)
	Storage	-20~60°C	
Humidity	Operation	20~85%RH	Maximum wet-bulb temperature should not exceed 29°C. No condensation.
	Storage	5~85%RH	
Vibration	Non-operation	10~500Hz, 1octave/20minute, 2G, 1.5mm max, 1hour each X, Y and Z directions	For single module without package.
Shock	Non-operation	30G, 6ms, 1time each ±X, ±Y and ±Z directions.	

NOTE: Table 13-2 and Figure 13-1 show the shock resistance standard when module is packaged.

Table 13-2 Shock resistance standard when module is packaged

Dropping location	Dropping height	Count
A~J	60cm	1 time

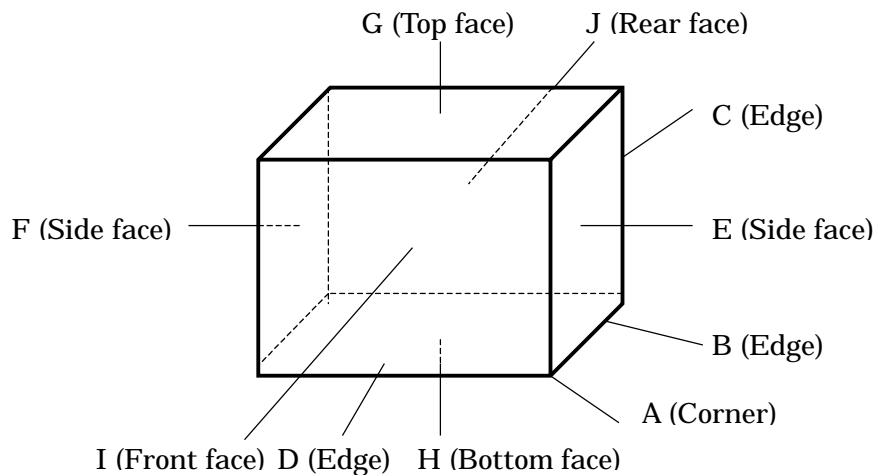


Figure 13-1 Direction to apply shock to package

DOCUMENT CONTROL SECTION

DATE

						TITLE	FLC51UXC8V		
						DRAW. NO.	Tech Bes LCD-00108		
								CUST.	
EDIT	DATE	DESIG.	CHECK	APPR.		DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION		
	DESIG.			CHECK		APPR.			21/

14. INDICATIONS

This module has the following indications.

- (1) Product name : **LCD unit**
- (2) Model Number : **FLC51UXC8V**
- (3) Product Drawing Number : **NA19025-C151**
- (4) Manufacturing Number : **1 9 0 0 0 0 1**

Serial number
(To be reset every month on 1st.)

Manufacturing month
(Oct. = X, Nov. =Y, Dec. =Z)

Last digit of manufacturing year.

- (5) Version number : **01A** (Example)
-1st 2 digits "01" means operational version.
-3rd alphabet means functional version.
- (6) Manufacturer Country Name : **MADE IN JAPAN**
- (7) Company Name ③ : **FUJITSU DISPLAY TECHNOLOGIES CORPORATION**
- (8) Disposal method of cold-cathode tubes. (See Figure 14-1)
- (9) Caution when changing cold-cathode tubes. (See Figure 14-2)

・ THIS TFT COLOR LCD
CONTAINS COLD CATHODE
FLUORESCENT LAMPS. PLEASE
FOLLOW LOCAL ORDINANCES
OR REGULATIONS FOR ITS DISPOSAL.
・ 当該液晶ディスプレイユニットには
蛍光管が組み込まれていますので、
地方自治体の条例または規則に従って
廃棄して下さい。

Figure 14-1

・ WHEN CHANGING COLD CATHODE FLUO-
RESCENT LAMPS, FOLLOW OPERATING
SPECIFICATIONS. ESPECIALLY BE CAREFUL
BOUT THE LAMPS SIDE-EDGE.
・ 蛍光管の交換は作業仕様書に従っ
て行って下さい。特に蛍光管ホル
ダ側面のエッジに気をつけて下さ
い。

Figure 14-2

15. PACKAGING

15-1 Packing specifications

- (1) 4LCD modules/1package.
(2) Weight: approximately 17kg/1package.
(3) Outline dimensions: 576mm(W)x316mm(D)x508mm(H)

15-2 Packing method

Figure 15-1,2 shows the packing method.

DOCUMENT CONTROL SECTION

DATE

						TITLE	
						FLC51UXC8V	
						DRAW. NO.	CUST.
						Tech Bes LCD-00108	
03	20020626				Change Company Name		
02	20020227				Change PACKAGING Term		
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	22/
	DESIG.			CHECK			

A

B

C

D


A

B

C

D

E

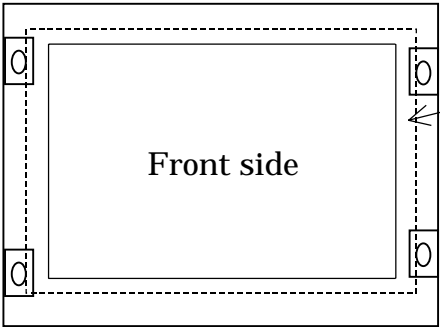

Protective sheet


Front side

a


b

a

b

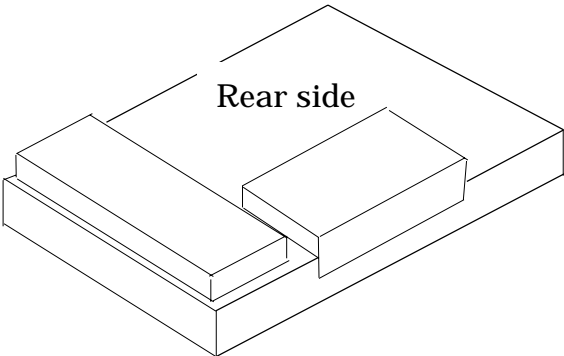

Rear side

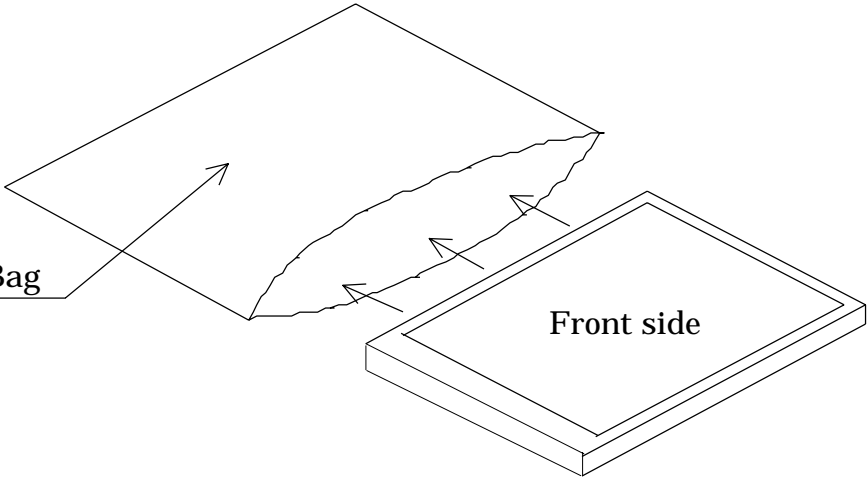

Anti-Electric Bag

Front side

Fig.15-2 (a) Packaging Method


DOCUMENT CONTROL SECTION

DATE

02	20020227				Add this page.
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION
DESIG.			CHECK		APPR.

TITLE		FLC51UXC8V			
DRAW. NO.		Tech Bes LCD-00108			CUST.
FUJITSU DISPLAY TECHNOLOGIES CORPORATION		23 /			

E

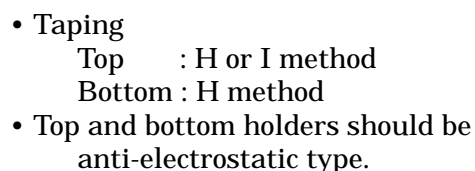

1

A



C

Note2) The figures in () show inside measurements of the container (B).

Figure.15-2 (d) Packing method

D

DATE _____

F

		1		2		3		4	
A	16.WARRANTY								
	The warranty period is one year after shipping. Products which fail during this period are repaired or replaced without charge, unless the failure is caused by user.								
B	17.PRECAUTIONS								
	Adhere to the following precautions to use this LCD module properly.								
C	(1) Handling of LCD panel								
	<p>Do not apply any strong mechanical shock to the LCD panel. Since the LCD panel is made of glass, excessive shock may damage the panel or cause a malfunction.</p> <p>Do not press hard on the LCD panel surface.</p> <p>In the LCD panel, the gap between two glass plates is kept perfectly even to maintain display properties and reliability. The hard pressure on the LCD panel may cause the following problems.</p> <p>Ununiformity of color Disorder of orientation of liquid crystal</p> <p>Problem returns to normal condition after a while. Problem returns to normal condition by turning the power off and turning on again. However these operations should be avoided to insure reliability.</p> <p>Do not scratch the polarizer film on the LCD panel surface.</p> <ul style="list-style-type: none"> • Do not press or rub the display surface with a hard tool, tweezers, etc. • For handling, use cotton or conductive gloves so that the display surface is not soiled. • If dust or dirt soils the display surface, clean it as follows with a soft cloth (deerskin, etc.) <p>[Dust] Wipe off with a soft cloth. (do not rub.)</p> <p>[Dirt] Apply clear water to a soft cloth and squeeze hard out of water drops, then lightly wipe off the specified parts. Only if the dirt is hardly wiped off, use isopropyl alcohol or ethanol.</p> <p>Be careful not to splash the water or the solvents on the edge of polarizer and in the LCD unit.</p> <p>The polarizer possibly exfoliates due to the solvent and water penetrated between the polarizer and the LCD panel.</p> <p>Do not use unspecified solvent such as ketone (acetone, etc.) and aromatics (xylene, toluene, etc.)</p> <p>(Caution) Be careful not to allow the water or solvent to enter the module.</p> <ul style="list-style-type: none"> • If saliva or water drops are left for a long period of time, the part may become deformed or discolored. <p>Wipe off immediately in the same way as for dirt.</p> <ul style="list-style-type: none"> • Do not allow oil to adhere to the module since excessive oil is hard to clean. 								
D									
E									
F									

DOCUMENT CONTROL SECTION

DATE

						TITLE FLC51UXC8V			
						DRAW.NO.			
						Tech Bes LCD-00108			
						CUST.			
02 20020227 .						Change this page number.			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION				
DESIG.			CHECK			APPR.		FUJITSU DISPLAY TECHNOLOGIES CORPORATION	27 /
1									

A

B

C

D

E

F

A

(2) Handling of LCD module

B

B

C

- C

D

D

(3) Precautions in regards of operating the LCD module

F

DOCUMENT CONTROL SECTION

DATE _____

						TITLE FLC51UXC8V													
						DRAW. NO. Tech Bes LCD-00108										CUST.			
02	20020227					Change this page number.													
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION										FUJITSU DISPLAY TECHNOLOGIES CORPORATION	Sheet 28 /			
	DESIG.			CHECK				APPR.											

1	2	3	4
---	---	---	---

A

The following troubles occur when the LCD module is not used under recommended temperature.

- Operation under high temperature(>50): Display colors shift to blue.
- Storage under high temperature(>60): The polarizer film deteriorates and contrast decreases.
- Operation under low temperature(< 0): The response speed decreases considerably.
- Storage under low temperature(<-20): The liquid crystal may solidify and become damaged.

Be sure to input the control signals at the correct timing.
If control signals (DCLK, ENAB) are not input, or if the timing is out of the specified timing, DC voltage may be applied to the liquid crystal and, as a result, cause image sticking or deterioration of contrast.

A

B

(4) Precautions in regards of designing module mounting

Excessive force should not be applied to the screen or the rear side of the LCD module. Excessive pressure on the screen caused by the installation of the LCD module may deteriorate display quality and reliability. Brightness uniformity and the reliability of CCFL may decrease if the pressure is applied to the backlight module.

Avoid twisting and bending the LCD module.
Excessive twist and bend may damage display quality and reliability.

Avoid extending the power cable between the LCD module and inverter.
This may cause the backlight to flicker or not to light.

Keep the backlight cable apart from the metal enclosure of the LCD module.
When frequency current for backlight driving leak to the metal enclosure, the desired brightness may not be assured.

When Mounting LCD module with M4 screws (x4), tighten the screws with torque below 5kgf.

B

C

(5) Storage method

Do not store the LCD module in an atmosphere of organic solvent or corrosive gas. In an organic solvent atmosphere, the polarizer film discolors and display quality deteriorates. In a corrosive gas environment, various parts of the module may corrode or deteriorate.

Store the LCD module in a Fujitsu package.
At storing, Fujitsu packages can be stacked up to 3 boxes.
The LCD module is in an anti-static bag. Keep the module in that status.

C

D

(5) Storage method

Do not store the LCD module in an atmosphere of organic solvent or corrosive gas. In an organic solvent atmosphere, the polarizer film discolors and display quality deteriorates. In a corrosive gas environment, various parts of the module may corrode or deteriorate.

Store the LCD module in a Fujitsu package.
At storing, Fujitsu packages can be stacked up to 3 boxes.
The LCD module is in an anti-static bag. Keep the module in that status.

D

E

(5) Storage method

Do not store the LCD module in an atmosphere of organic solvent or corrosive gas. In an organic solvent atmosphere, the polarizer film discolors and display quality deteriorates. In a corrosive gas environment, various parts of the module may corrode or deteriorate.

Store the LCD module in a Fujitsu package.
At storing, Fujitsu packages can be stacked up to 3 boxes.
The LCD module is in an anti-static bag. Keep the module in that status.

E

F

						TITLE		FLC51UXC8V	
						DRAW. NO.		CUST.	
						Tech Bes LCD-00108			
02 20020227						Change this page number.			
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		29 /
DESIG.			CHECK		APPR.				

F

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

1

1			
---	--	--	--

1

A

Recommended storage environment

- B

B

The components of this LCD module can be grouped into metal, resin, glass and so on. As the backlight contains CCFL which includes mercury, it must be disposed according to the local ordinance or regulations.

All the packages are made of recyclable papers except the anti-ESD bag.

C

If the LCD panel is damaged, do not inhale and do not swallow the liquid crystal.
If the liquid crystal adhere to the body or cloths, wash it off with soap immediately.
Follow regular precautions for electronic components.

D

Fujitsu has adopted non-wash technology on module assembly process.

D

E


F

(8) Return method of the LCD unit requested for repair or analysis of the problem

- When the LCD unit is packaged and returned, adhere to the following procedures not to damage the LCD panel or the backlight cables. (Fig. 18-1(a)~(b))

When the LCD unit is returned without following the specified packaging procedures, FDTC will not take responsibility for the damages caused by the failure of the packaging method.

¹ Attach protective sheet.

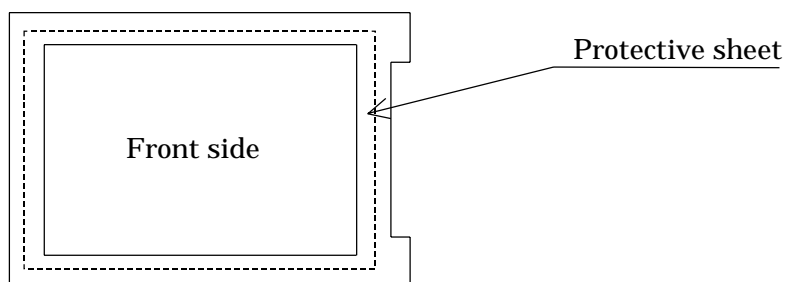

² Put the LCD unit into the anti-electric bag

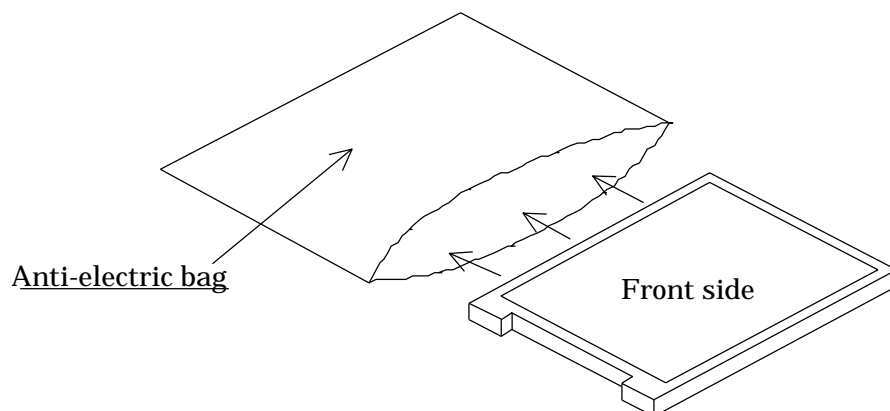


Fig. 17-1(a) Packaging method


DOCUMENT CONTROL SECTION

DATE

						TITLE FLC51UXC8V	
						DRAW. NO. Tech Bes LCD-00108	
						CUST.	
04	20020814					Add this page.	
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION	FUJITSU DISPLAY TECHNOLOGIES CORPORATION	
DESIG.			CHECK		APPR.		31 /

3 Storage into the container box

- When using the container box manufactured by FDTC

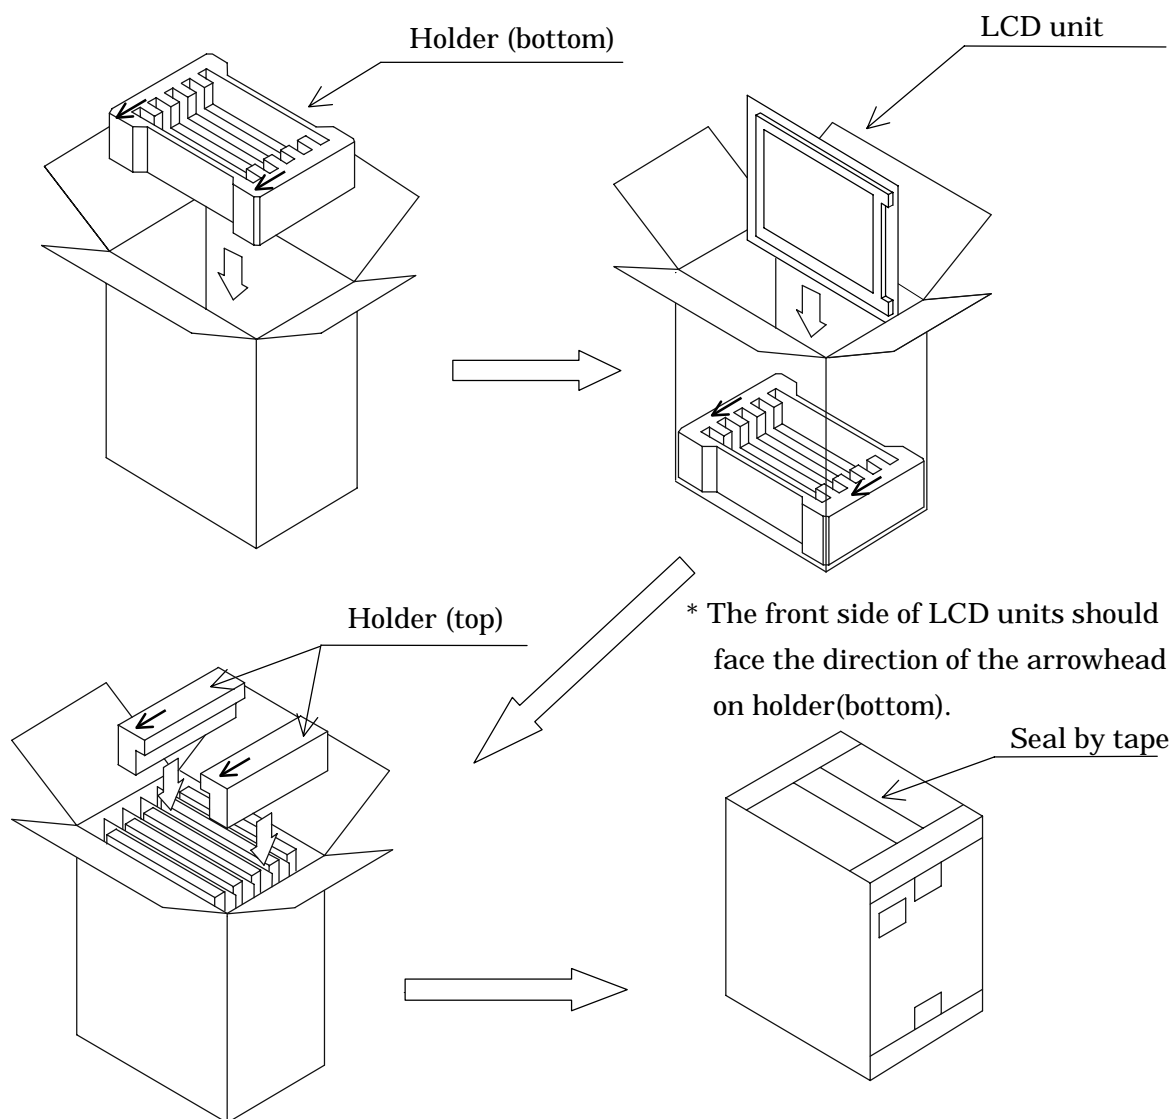

* The direction of the arrowhead on holder (top) should face the front side of the LCD units.

The arrowheads are shown on the holders.

Fig. 17-1(b) Packaging method

- When not using the container box manufactured by FDTC

Please pack the LCD units one by one and make sure not to damage the LCD unit when transporting.

DOCUMENT CONTROL SECTION






DATE

						TITLE FLC51UXC8V					
						DRAW. NO. Tech Bes LCD-00108				CUST.	
04	20020814				Add this page.						
EDIT	DATE	DESIG.	CHECK	APPR.	DESCRIPTION					FUJITSU DISPLAY TECHNOLOGIES CORPORATION	Sheet 32 /
	DESIG.			CHECK			APPR.				


1		2		3		4	
A		18.OTHERS		A			
B		Specifications of the TFT-LCD panel and other components used in this LCD module are subject to change.		B			
C		Both parties shall discuss together and make the best effort to reach agreement in case of the rising of any doubt to the contents of the specifications.		C			
D		This LCD module is not designed for the purpose where high reliability is required, such as for aero-space equipment, control system of nuclear power and medical life-support equipment.		D			
E				E			
F				F			
DATE		DOCUMENT CONTROL SECTION		TITLE		FLC51UXC8V	
EDIT		DATE		DRAW.NO.		CUST.	
DESIG.		CHECK		Add this page.			
DESIG.		CHECK		FUJITSU DISPLAY TECHNOLOGIES CORPORATION		33 /	
1							

[illegible]

Detail 0-0

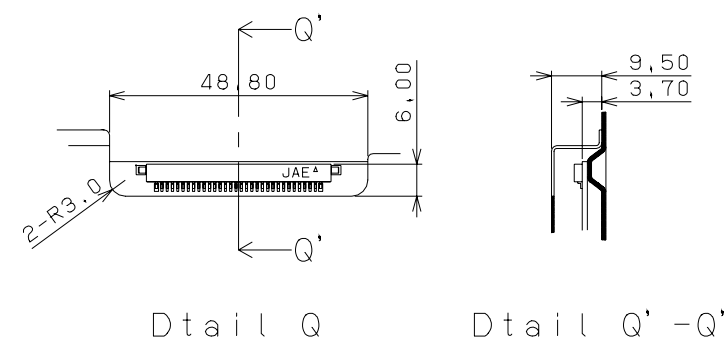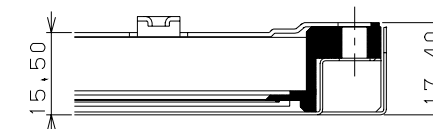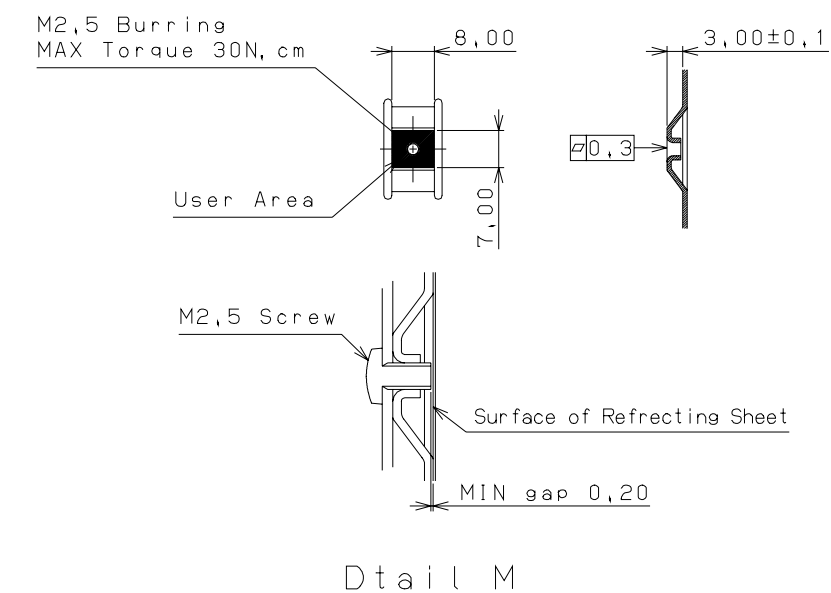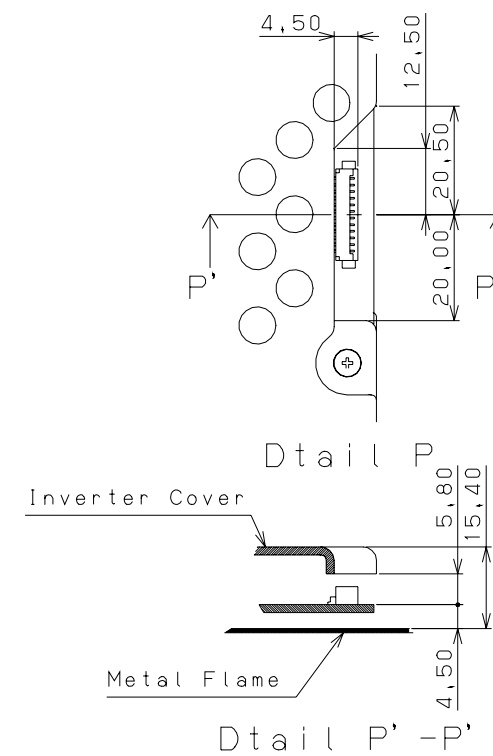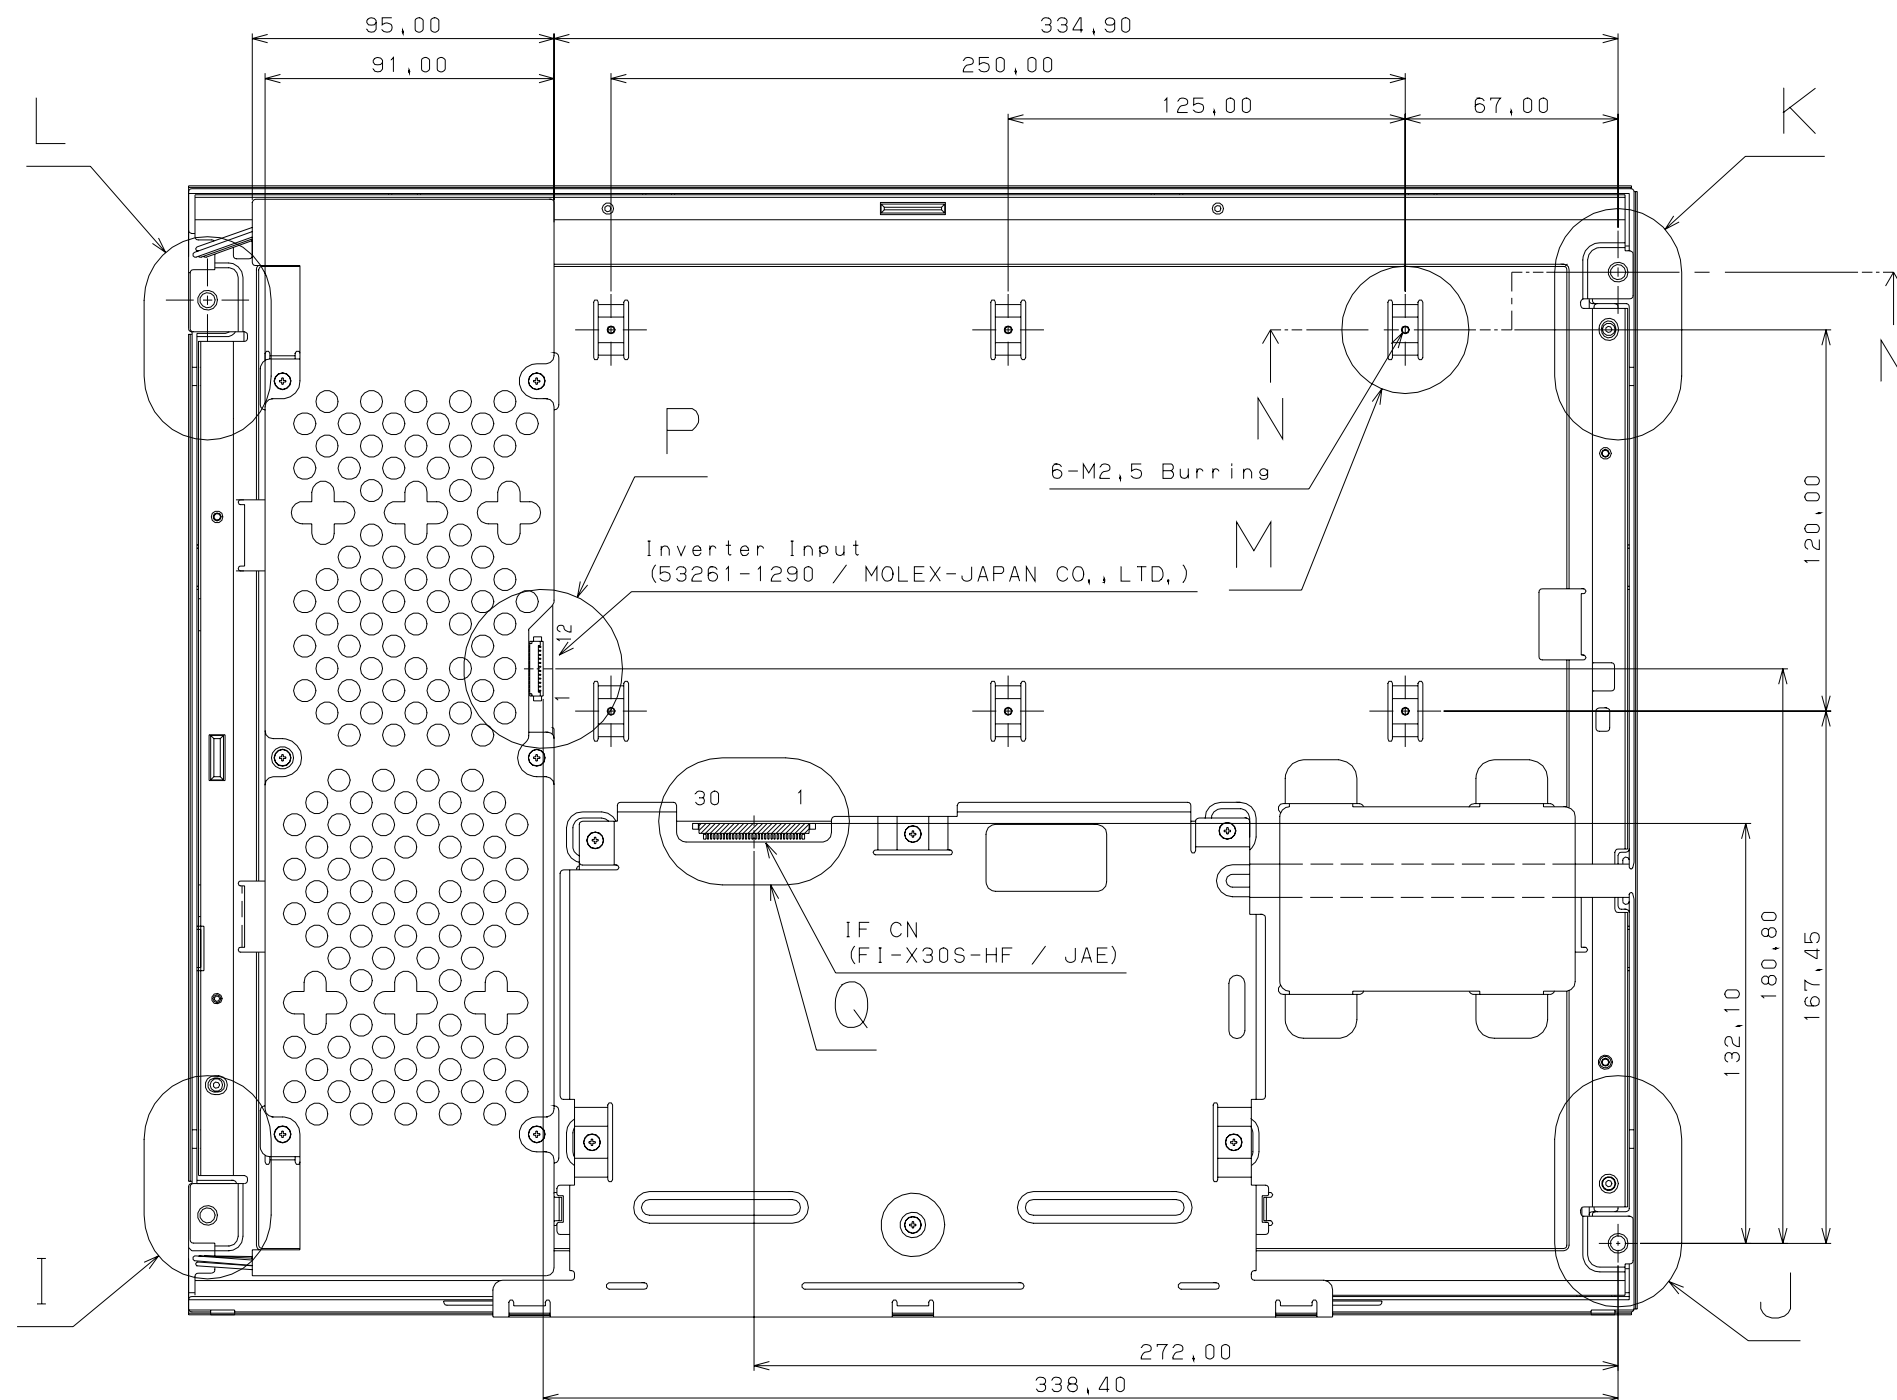


MATER.				FINISH							
				TITLE				SCALE			
04/20020814				Change Page No.				DRAW. NO.			
02/20020227				Change Page No.				Tec Bes LCD-00108			
EDIT.	DATE	DESIG.	CHECK	DESCRIPTION							
DESIG.			CHECK	APPR.							

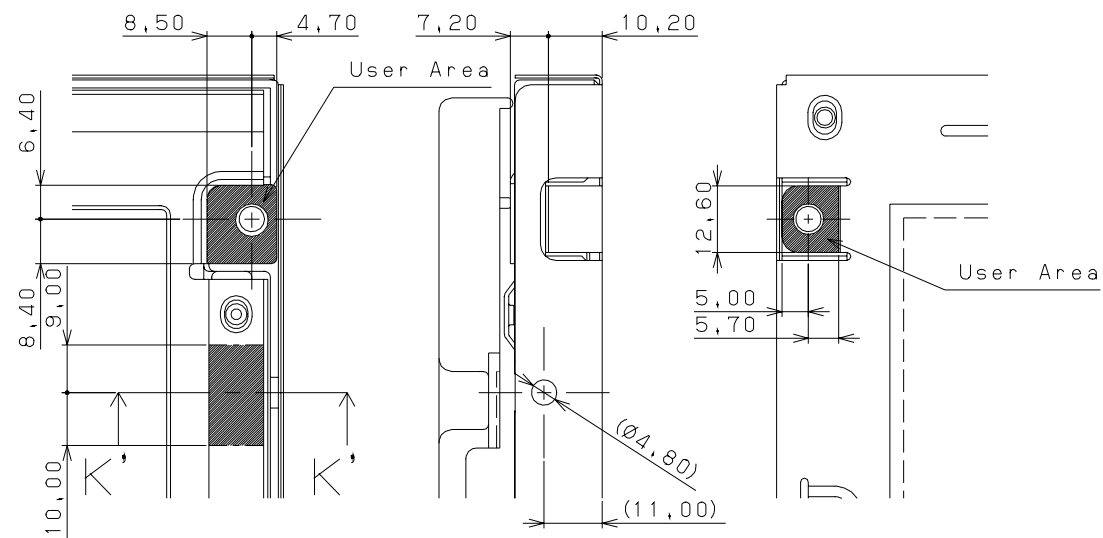

Detail K

Detail H


Detail D

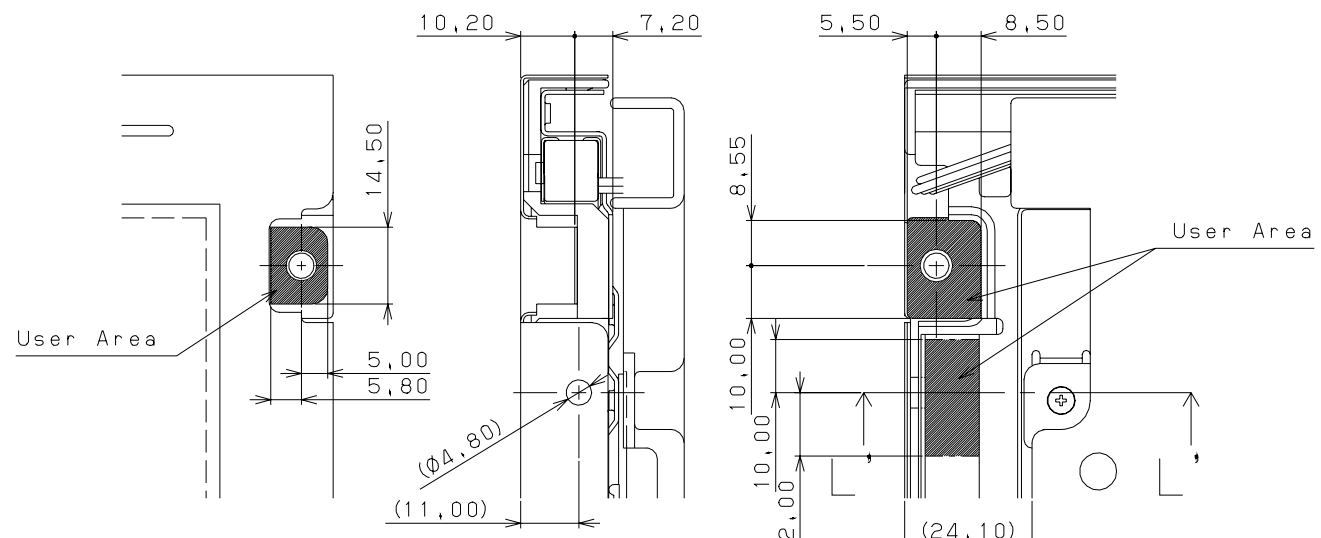


Detail C

Detail G


Detail L

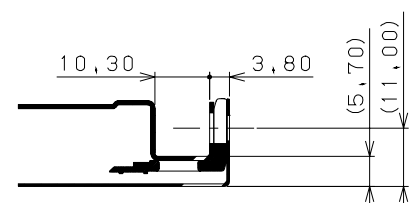

Detail K' -K'

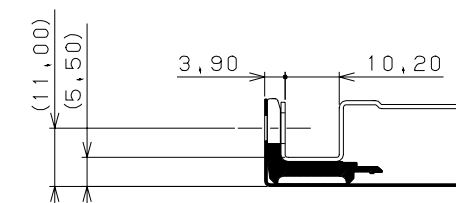


Detail L' -L'

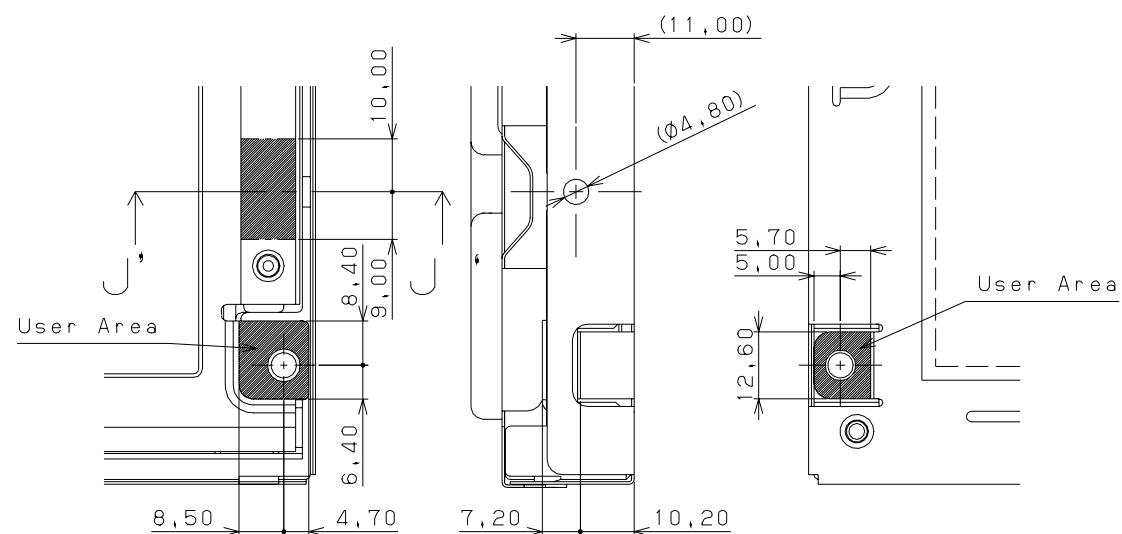

Detail J


Detail E

Detail A

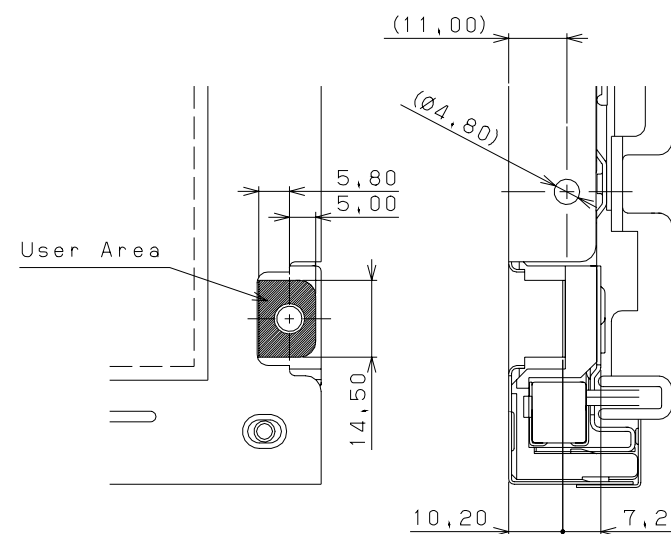


Detail B


Detail F

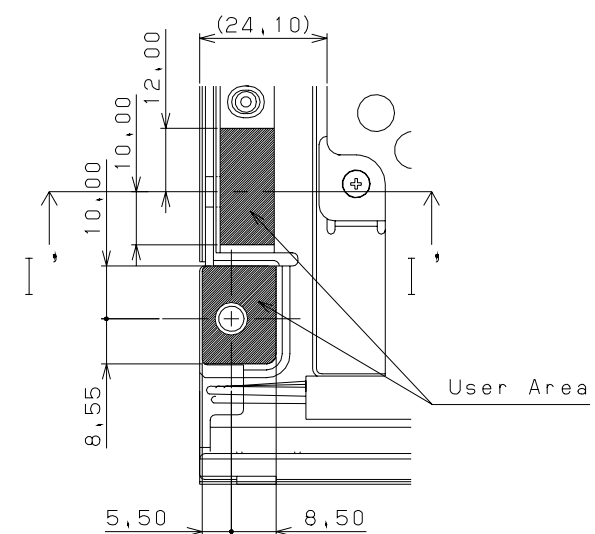

Detail I

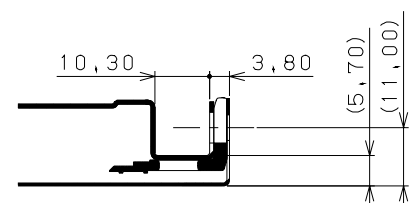

Detail J' -J'

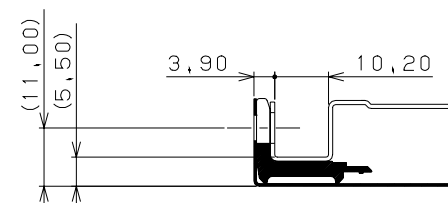

Detail I' -I'
