AUO

Version	0.2
Total pages	22
Date	29 Oct, 2008

Product Specification

7″ color TFT-LCD module

MODEL NAME: C070FW01 V1

(◆) Preliminary Specification
(   ) Final Specification

Rohs Compliance

Record of Revision

Version	Revise Date	Page	Content
Draft 0.1	13 Jul, 2007	0	First draft.
Draft 0.2	29 Oct.2008	13	Packing form update

Contents:

Appendix:

A. Physical specifications

NO.	Item	Specification	Remark
1	Display resolution(dot)	480RGB(W)×234(H)	
2	Active area(mm)	154.08(W)×86.58(H)	
3	Screen size(inch)	7.0(Diagonal)	
4	Dot pitch(mm)	0.107(W)×0.370(H)	
5	Color configuration	R. G. B. stripe	
6	Overall dimension(mm)	164.9(W)×100.0(H)×10.05(D)	Note 1
7	Weight(g)	TBD	
8	Surface treatment	AG (25%) with SWV film	
9	Backlight unit	CCFL	
10	Gray Scale Inversion	6 o'clock	

Note 1: Refer to Fig. 1

B. Electrical specifications

1. Pin assignment

   a. TFT-LCD panel driving section

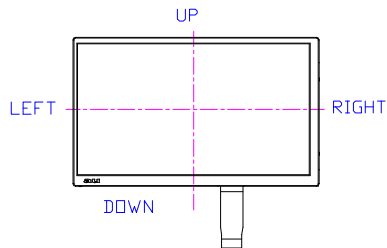| Pin no	Symbol	I/O	Description	Remark
1	GND	-	Ground for logic circuit	
2	V_{CC}	I	Supply voltage of logic control circuit for scan driver	
3	V_{GL}	I	Negative power for scan driver	
4	V_{GH}	I	Positive power for scan driver	
5	STVR	I/O	Vertical start pulse	Note 1
6	STVL	I/O	Vertical start pulse	Note 1
7	CKV	I	Shift clock input for scan driver	
8	U/D	I	UP/DOWN scan control input	Note 1,2
9	OEV	I	Output enable input for scan driver	
10	VCOM	I	Common electrode driving signal	
11	VCOM	I	Common electrode driving signal	
12	L/R	I	LEFT/RIGHT scan control input	Note 1,2
13	MOD	I	Sequential sampling and simultaneous sampling setting	Note 3
14	OEH	I	Output enable input for data driver	
15	STHL	I/O	Start pulse for horizontal scan line	Note 1
16	STHR	I/O	Start pulse for horizontal scan line	Note 1
17	CPH3	I	Sampling and shifting clock pulse for data driver	
18	CPH2	I	Sampling and shifting clock pulse for data driver	
19	CPH1	I	Sampling and shifting clock pulse for data driver	
20	V_{CC}	I	Supply voltage of logic control circuit for data driver	
21	GND	-	Ground for logic circuit	
22	VR	I	Alternated video signal input(Red)	
23	VG	I	Alternated video signal input(Green)	
24	VB	I	Alternated video signal input(Blue)	
25	AV_{DD}	I	Supply voltage for analog circuit	
26	AV_{SS}	-	Ground for analog circuit	

Note 1: Selection of scanning mode (please refer to the following table)

Setting of scan control input		IN/OUT state for start pulse				Scanning direction
U/D	L/R	STVR	STVL	STHR	STHL	
GND	V_{CC}	OUT	IN	OUT	IN	From up to down, and from left to right.
V_{CC}	GND	IN	OUT	IN	OUT	From down to up, and from right to left.
GND	GND	OUT	IN	IN	OUT	From up to down, and from right to left.
V_{CC}	V_{CC}	IN	OUT	OUT	IN	From down to up, and from left to right.

IN: Input; OUT: Output.

Note 2: Definition of scanning direction.

Refer to figure as below:

Note 3: MOD = H: Simultaneous sampling.

MOD = L: Sequential sampling.

Please set CPH2 and CPH3 to GND when MOD = H.

b. Backlight driving section (Refer to Figure 1)

No.	Symbol	I/O	Description	Remark
1	HI	I	Power supply for backlight unit (High voltage)	--
2	GND	-	Ground for backlight unit	--

2. Absolute maximum ratings

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Power voltage	V_{CC}	GND=0	-0.3	7	V	
	AV_{DD}	AV_{SS}=0	-0.3	7	V	
	V_{GH}	GND=0	-0.3	18	V	
	V_{GL}		-15	0.3	V	
	$V_{GH}-V_{GL}$		-	33	V	
Input signal voltage	V_i		-0.3	AV_{DD}+0.3	V	Note 1
	V_I		-0.3	V_{CC}+0.3	V	Note 2
	VCOM		-2.9	5.2	V	
CCFL	V_L			3,000	Vrms	
	I_L			10	mA	
Temp. range		Operation	-30	+85	˚C	Note 3
		Storage	-40	+95	˚C	

Note 1: VR, VG, VB.

Note 2: STHL, STHR, OEH, L/R, CPH1~CPH3, STVR, STVL, OEV, CKV, U/D,MOD

Note 3: Operation temp. range means Ambient Temp.

3. Electrical characteristics

a. Typical operating conditions (GND=AVss=0V, Note 4)

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply		V_{CC}	3	5	5.5	V	
		AV_{DD}	4.5	5	5.5	V	
		V_{GH}	14.3	15	15.7	V	
		V_{GL}	-10.5	-10	-9.5	V	
Video signal amplitude (VR,VG,VB)		V_{iA}	0.4	-	AV_{DD}-0.4	V	Note 1
		V_{iAC}	-	3	-	V	AC component
		V_{iDC}	-	AV_{DD}/2	-	V	DC component
VCOM		V_{CAC}	3.5	5.6	6.5	Vp-p	AC component
		V_{CDC}	1.4	1.7	2.0	V	DC component
Input signal voltage	H Level	V_{IH}	0.8 V_{CC}	-	V_{CC}	V	Note 2
	L Level	V_{IL}	0	-	0.2 V_{CC}	V	

Note 1: Refer to Fig.4- (a).

Note 2: STHL, STHR, OEH, L/R, CPH1~CPH3, STVR, STVL, OEV, CKV, U/D,MOD

Note 3: Be sure to apply GND, V_{CC} and V_{GL} to the LCD first, and then apply V_{GH}.

b. Current consumption (GND=AVss=0V)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Current for driver	I_{GH}	V_{GH}=15V	-	0.20	0.5	mA	
	I_{GL}	V_{GL}=-10V	-	0.80	1.5	mA	
	I_{CC}	V_{CC}=5V	-	3.0	6.0	mA	
	I_{DD}	AV_{DD}=5V	-	17.0	30	mA	

c. Backlight driving conditions (Self-heating type)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp voltage	V_L	513	570	627	Vrms	
Lamp current	I_L	-	6	6.5	mArms	
Frequency	F_L	50	-	80	kHz	Note 2
Lamp starting voltage	V_S	-	890	1,110	Vrms	Ta = 25℃ ,Note 4
		-	1,160	1,440	Vrms	Ta = 0℃ ,Note 4
		-	1,500	1,870	Vrms	Ta = -30℃ ,Note 4
Discharge Stabilization Time	Ts			3	min	
Discharge Time lag	Td			1	sec	Note 5
Lamp life time		10,000	-	-	Hr	Note 6

Note 1: Panel surface temperature should be kept less than content of "2. Absolute maximum ratings"

Note 2: The lamp frequency should be selected as different as possible from display horizontal synchronous signal to avoid interference. (Reference value)

Note 3: Values of "Lamp Voltage", "Lamp power consumption" and "Starting voltage" are defined on condition of the LCD module derived by NF[AS-114B] circuit which measured from connectors of product(as below figure). However this isn't the values that we can assure stability of starting lamp on condition that the module is installed in your set.
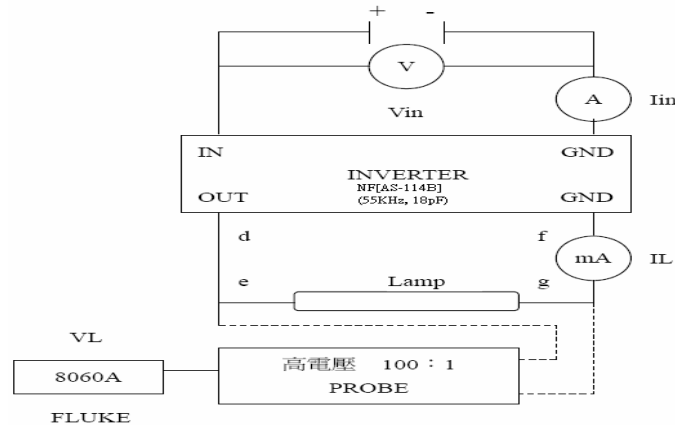
Note 4: The "MAX" of "Starting voltage" means the minimum voltage to light normally in the LCD module.

Note 5: The time needed to start discharge when the over 1500Vrms voltage is continuously applied to both end of the lamp. Before testing, the lamp is left in the dark room(ambient temperature: 25+/- 2°C, ambient luminance: less than 0.1lux) for 24Hrs after lighted for 1minute at lated lamp current.

Note 6:The" Lamp life time" is defined as the module brightness decrease to 50% original brightness at Ta=25℃, I_L=6mA.

5. AC Timing

a. Timing conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
Rising time	t_r	-	-	10	ns	Note 1
Falling time	t_f	-	-	10	ns	Note 1
High and low level pulse width	t_{CPH}	99	103	107	ns	CPH1~CPH3
CPH pulse duty	t_{CWH}	40	50	60	%	CPH1~CPH3
CPH pulse delay	t_{C12} t_{C23} t_{C31}	30	$t_{CPH}/3$	$t_{CPH}/2$	ns	CPH1~CPH3
STH setup time	t_{SUH}	20	-	-	ns	STHR,STHL
STH hold time	t_{HDH}	20	-	-	Ns	STHR,STHL
STH pulse width	t_{STH}	-	1	-	t_{CPH}	STHR,STHL
STH period	t_H	61.5	63.5	65.5	μs	STHR,STHL
OEH pulse width	t_{OEH}	-	1.22	-	μs	OEH
Sample and hold disable time	t_{DIS1}	-	8.28	-	μs	
OEV pulse width	t_{OEV}	-	5.40	-	μs	OEV
CKV pulse width	t_{CKV}	-	4.18	-	μs	CKV
Clean enable time	t_{DIS2}	-	3.74	-	μs	
Horizontal display start	t_{SH}	-	0	-	$T_{CPH}/3$	

Horizontal display timing range	t_{DH}	-	1440	-	$T_{CPH}/3$	
STV setup time	t_{SUV}	400	-	-	ns	STVL,STVR
STV hold time	t_{HDV}	400	-	-	ns	STVL,STVR
STV pulse width	t_{STV}	-	-	1	t_H	STVL,STVR
Horizontal lines per field	t_V	256	262	268	t_H	Note 2
Vertical display start	t_{SV}		3	-	t_H	
Vertical display timing range	t_{DV}		234	-	t_H	
VCOM rising time	t_{rCOM}		-	5	μs	
VCOM falling time	t_{fCOM}		-	5	μs	
VCOM delay time	t_{DCOM}		-	3	μs	
RGB delay time	t_{DRGB}		-	1	μs	

Note 1: For all of the logic signals.

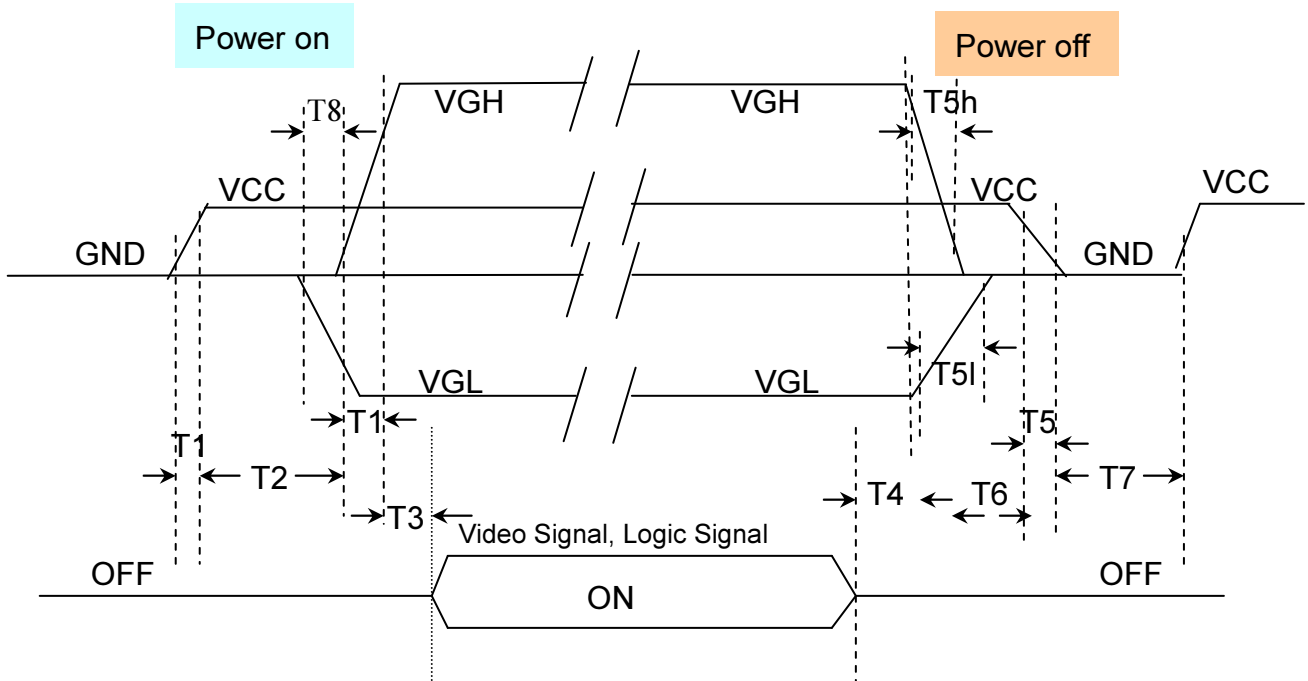Note 2: Please don't use odd horizontal lines to drive LCD panel for both odd and even field simultaneously.

Note 3: For Partial mode (4:3, side-black)

b. Timing diagram

  Please refer to the attached drawing, from Fig.2 to Fig.6.

Model   C070FW01 V1
Version   :   0.2
Page   :   9 /22

5. Power Sequence (Suggestion)

Sequence for power on/off and Signal on/off

T1 $\leqq$ 15ms (From 10%*VCC to 90%*VCC，when VCC is Low to High)；

T2 $\leqq$ 10ms (From 90%*VCC to 10%*VGH，when VCC is Low to High)；

T3 $\leqq$ 10ms (From 90%*VGH to Video signal，when VGH is Low to High)；

T4 $\leqq$ 10ms (From Video signal to 90%*VGH，when VGH is High to Low)；

T5 $\leqq$ 20ms (From 90%*VCC to 10%*VCC，when VCC is High to Low)；

T5h$\leqq$ 25ms (From 90%*VGH to 10%*VGH，when VGH is High to Low)；

T5l $\leqq$ 35ms (From 90%*VGL to 10%*VGL，when VGL is Low to High)；

T6 $\leqq$ 10ms (From 10%*VGH to 90%*VCC，when VCC is Low to High)；

T7 $\geqq$ 0.4s (From 10%*VCC is H→L to 10%*VCC is L→H)。

T8 $\geqq$ 1.5ms (From 10%*VGL(H→L) to 10%*VGH (L→H))。

C. Optical specification (Note 1, Note 2)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time	Rise Fall	Tr Tf	$\theta=0°$	- -	12 18	24 36	ms ms	Note 3,5
Contrast ratio		CR	At optimized Viewing angle	200	300	-		Note 4, 5
Viewing angle	Top Bottom Left Right		$CR \geqq 10$	30 50 50 50	40 60 60 60	- - - -	deg.	Note 5, 6
Viewing angle	Top Bottom Left Right		$CR \geqq 5$	40 60 60 60	50 70 70 70	- - - -	deg.	Note 5, 6
Brightness		Y_L	I_L=6mA, 25℃	400	500	-	cd/m²	Note 7
White chromaticity	X		$\theta=0°$	0.26	0.31	0.36		Note 7
	Y		$\theta=0°$	0.28	0.33	0.38		
NTSC Ratio			$\theta=0°$		48		%	

Note 1 : Ambient temperature =25℃, and lamp current I_L = 6 mArms. To be measured in the dark room. DC/AC inverter driving frequency: 70 kHz.

Note 2 : To be measured on the center area of panel with a viewing cone of 1°by Topcon luminance meter BM-5, after 15 minutes operation.

Note 3. Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.
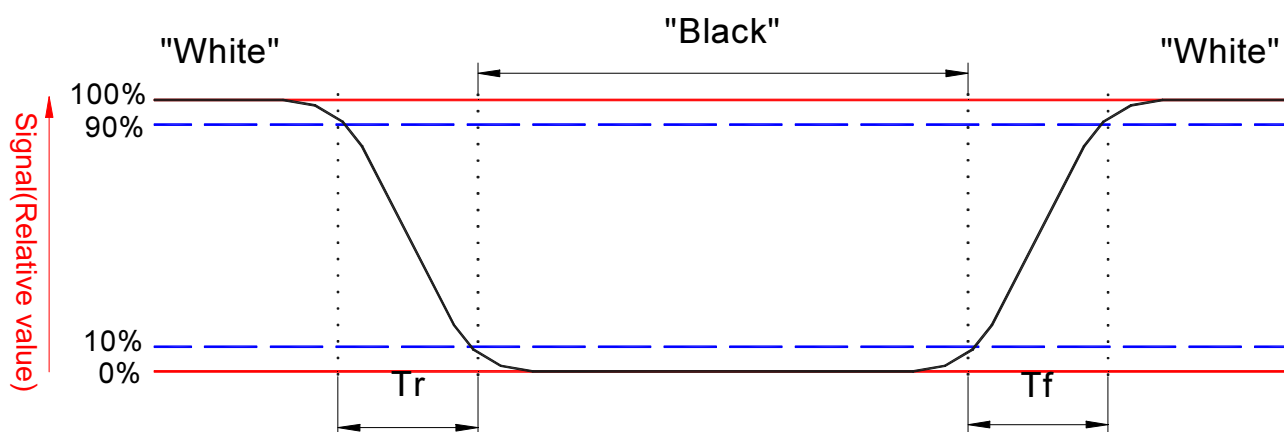
Note 4. Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 5. White $Vi = V_{i50} + 1.5V$

Black $Vi = V_{i50} \pm 2.0V$

"$\pm$" means that the analog input signal swings in phase with V_{COM} signal.

"$\mp$" means that the analog input signal swings out of phase with V_{COM} signal.

V_{i50} : The analog input voltage when transmission is 50%

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 6. Definition of viewing angle, Refer to figure as below.
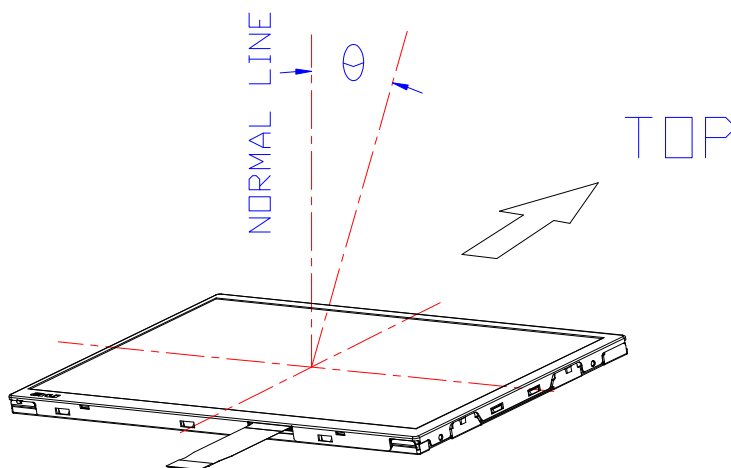
Note 7. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

D. Reliability test items(Note 3):

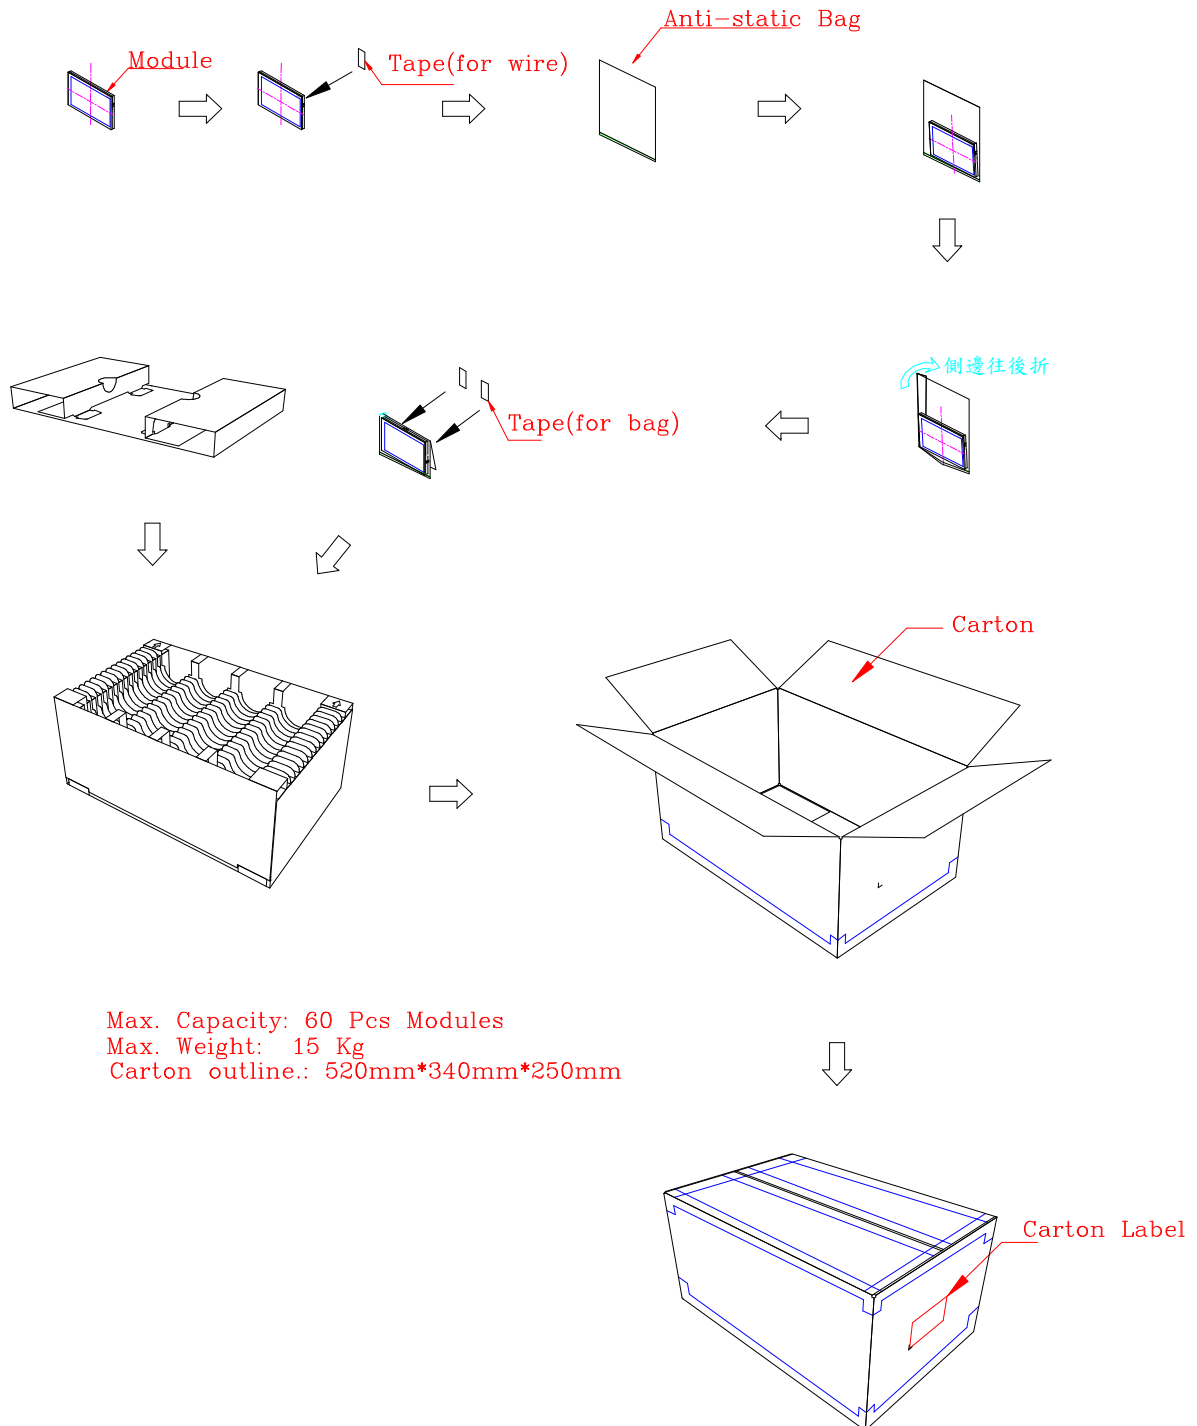| No.	Test items	Conditions	Remark
1	High temperature storage	Ta= 95℃ 240Hrs	
2	Low temperature storage	Ta= -40℃ 240Hrs	
3	High temperature operation	Tp= 85℃ 240Hrs	
4	Low temperature operation	Ta= -30℃ 240Hrs	
5	High temperature and high humidity	Tp= 60℃, 90% RH 240Hrs	Operation
6	Heat shock	-30℃~85℃/200 cycles 1Hrs/cycle	Non-operation
7	Electrostatic discharge	±200V,200pF(0Ω), once for each terminal	Non-operation
8	Vibration	Frequency range : 8~33.3Hz Stoke : 1.3mm Sweep : 2.9G, 33.3 ~ 400Hz Cycle : 15 minutes 2 hours for each direction of X,Z 4 hours for Y direction	JIS D1601, A-10 condition A Note 4
9	Mechanical shock	100G, 6ms, ±X,±Y,±Z 3 times for each direction	JIS C7021, A-7 Condition C
10	Vibration (with carton)	Random vibration: 0.015G^2/Hz from 5~200Hz –6dB/octave from 200~500Hz	IEC 68-34
11	Drop (with carton)	Height: 60cm 1 corner, 3 edges, 6 surfaces	JIS Z0202

Note1: Ta: Ambient temperature.
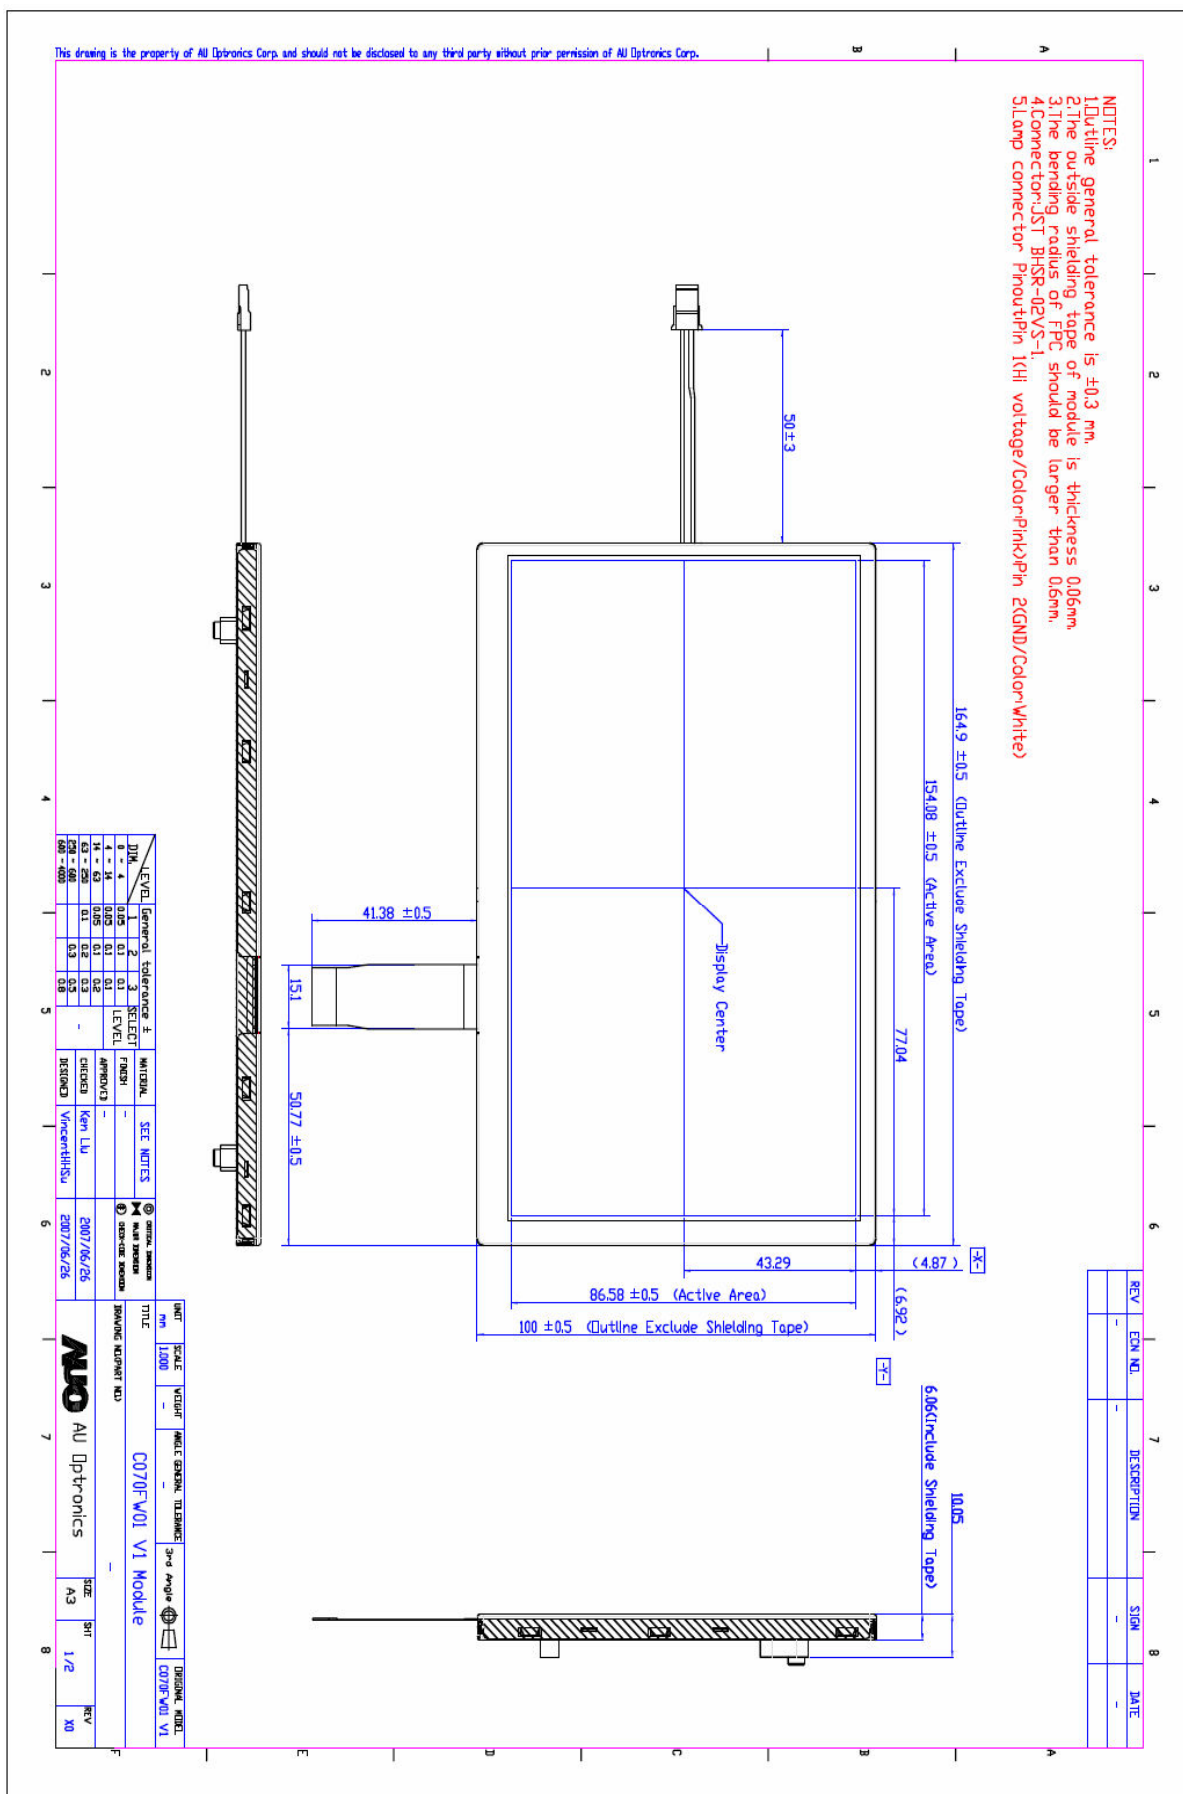
Note2: Tp: Panel Surface Temperature

Note3: In the standard conditions, there is not display function NG issue occurred. All the
cosmetic specification is judged before the reliability stress.
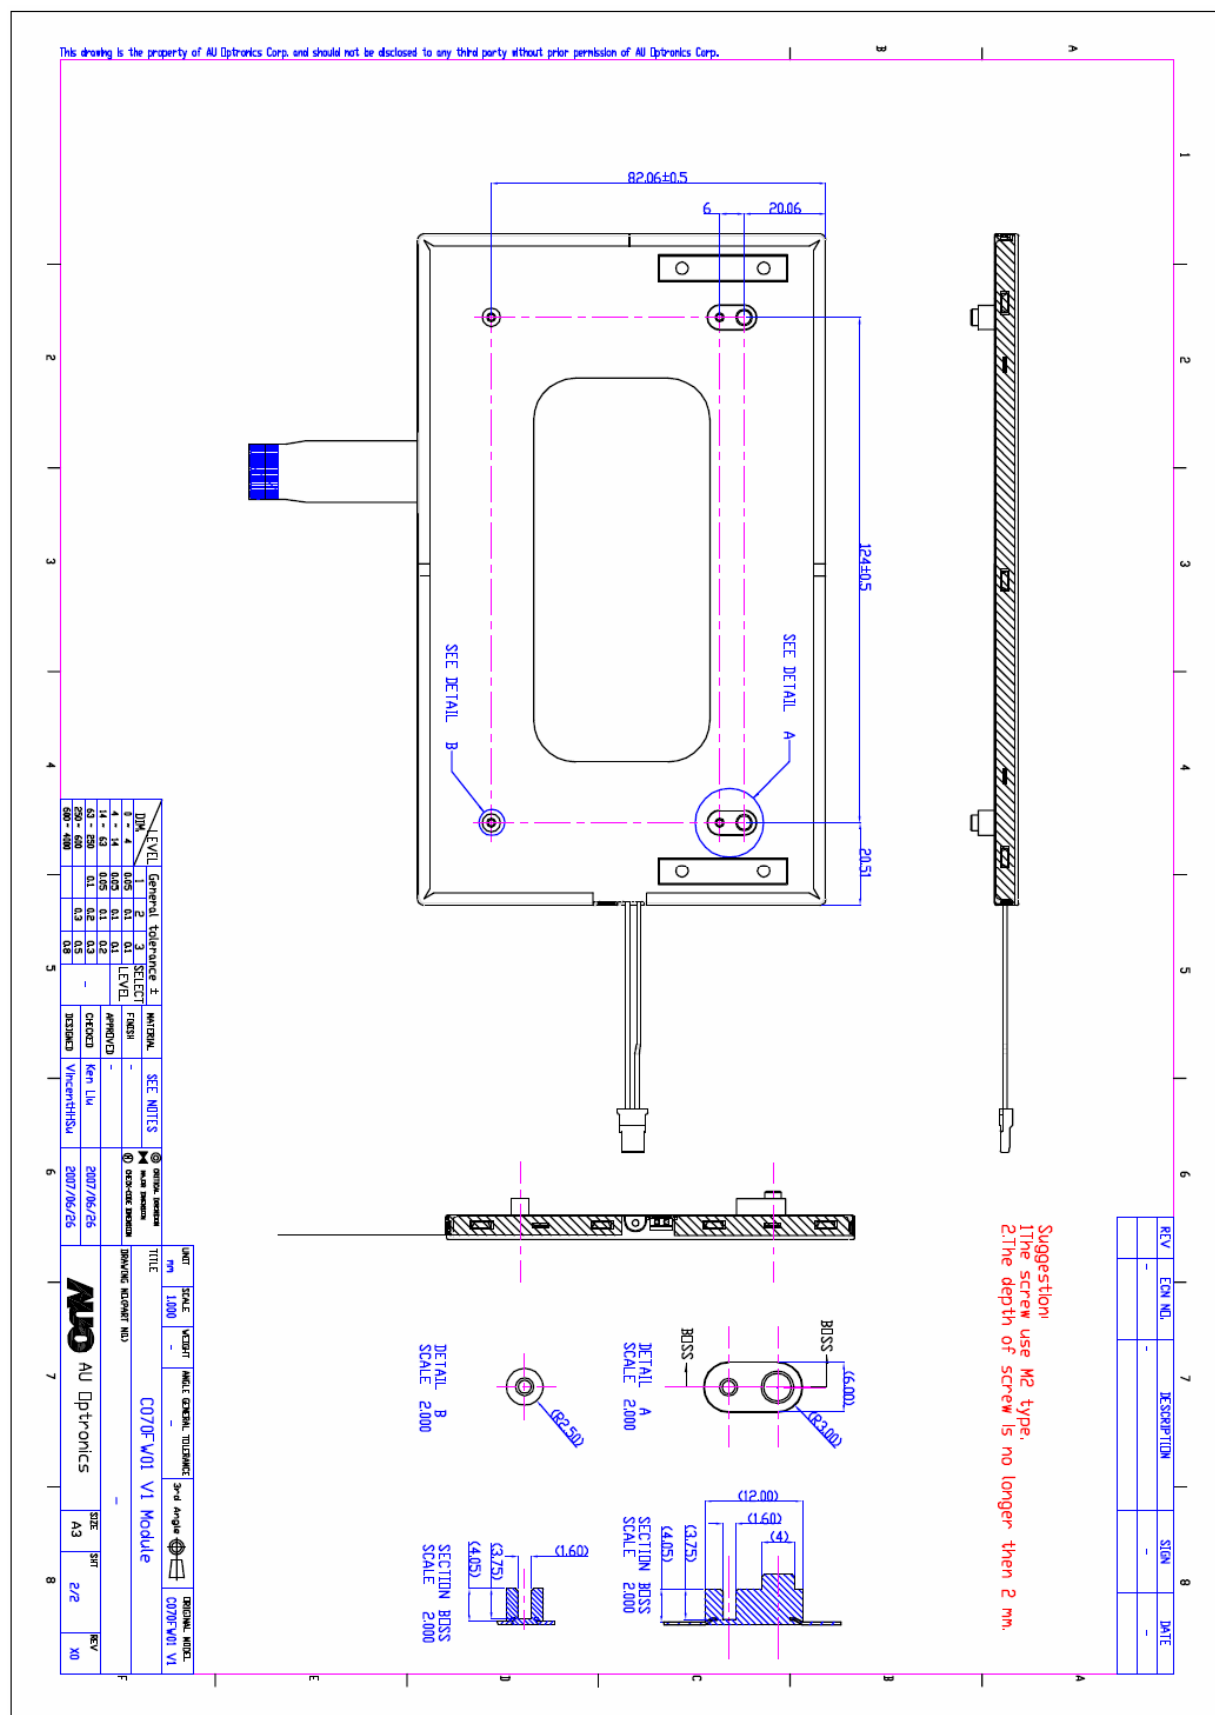
Note 4: Cycle time for vibration is 15 minutes.

E. Packing form

Module

Tape(for wire)

Anti-static Bag

側邊往後折

Tape(for bag)

Carton

Max. Capacity: 60 Pcs Modules
Max. Weight: 15 Kg
Carton outline.: 520mm*340mm*250mm

Carton Label

Fig.1- Outline dimension of TFT-LCD module(Front Side)

This drawing is the property of AU Optronics Corp. and should not be disclosed to any third party without prior permission of AU Optronics Corp.

NOTES:
1.Outline general tolerance is ±0.3 mm.
2.The outside shielding tape of module is thickness 0.06mm.
3.The bending radius of FPC should be larger than 0.6mm.
4.Connector:JST BHSR-02VS-1.
5.Lamp connector PinoutiPin 1(Hi voltage/Color:Pink)·Pin 2(GND/Color:White)

50 ± 3

164.9 ±0.5 (Outline Exclude Shielding Tape)

154.08 ±0.5 (Active Area)

41.38 ±0.5

Display Center

77.04

15.1

50.77 ±0.5

43.29

(4.87)

(6.92)

86.58 ±0.5 (Active Area)

100 ±0.5 (Outline Exclude Shielding Tape)

6.06(Include Shielding Tape)

10.05

DIM. | LEVEL | General tolerance ±
SELECT LEVEL
0 ~ 4 | 0.05 | 0.1 | 0.1
4 ~ 14 | 0.05 | 0.1 | 0.1
14 ~ 63 | 0.05 | 0.2 | 0.2
63 ~ 250 | 0.1 | 0.2 | 0.3
250 ~ 600 | 0.1 | 0.3 | 0.5
600 ~ 4000 | 0.3 | 0.5 | 0.8

MATERIAL: SEE NOTES
FINISH: -
APPROVED: Ken Liu
CHECKED: Ken Liu
DESIGNED: Vincent.H.Hsu

2007/06/26
2007/06/26

AU Optronics

C070FW01 V1 Module

UNIT: mm
SCALE: 1.000
WEIGHT: -
ANGLE GENERAL TOLERANCE: -
3rd Angle

SIZE: A3
SHT: 1/2
REV: X0

ORIGINAL MODEL: C070FW01 V1

REV | ECN NO. | DESCRIPTION | SIGN | DATE
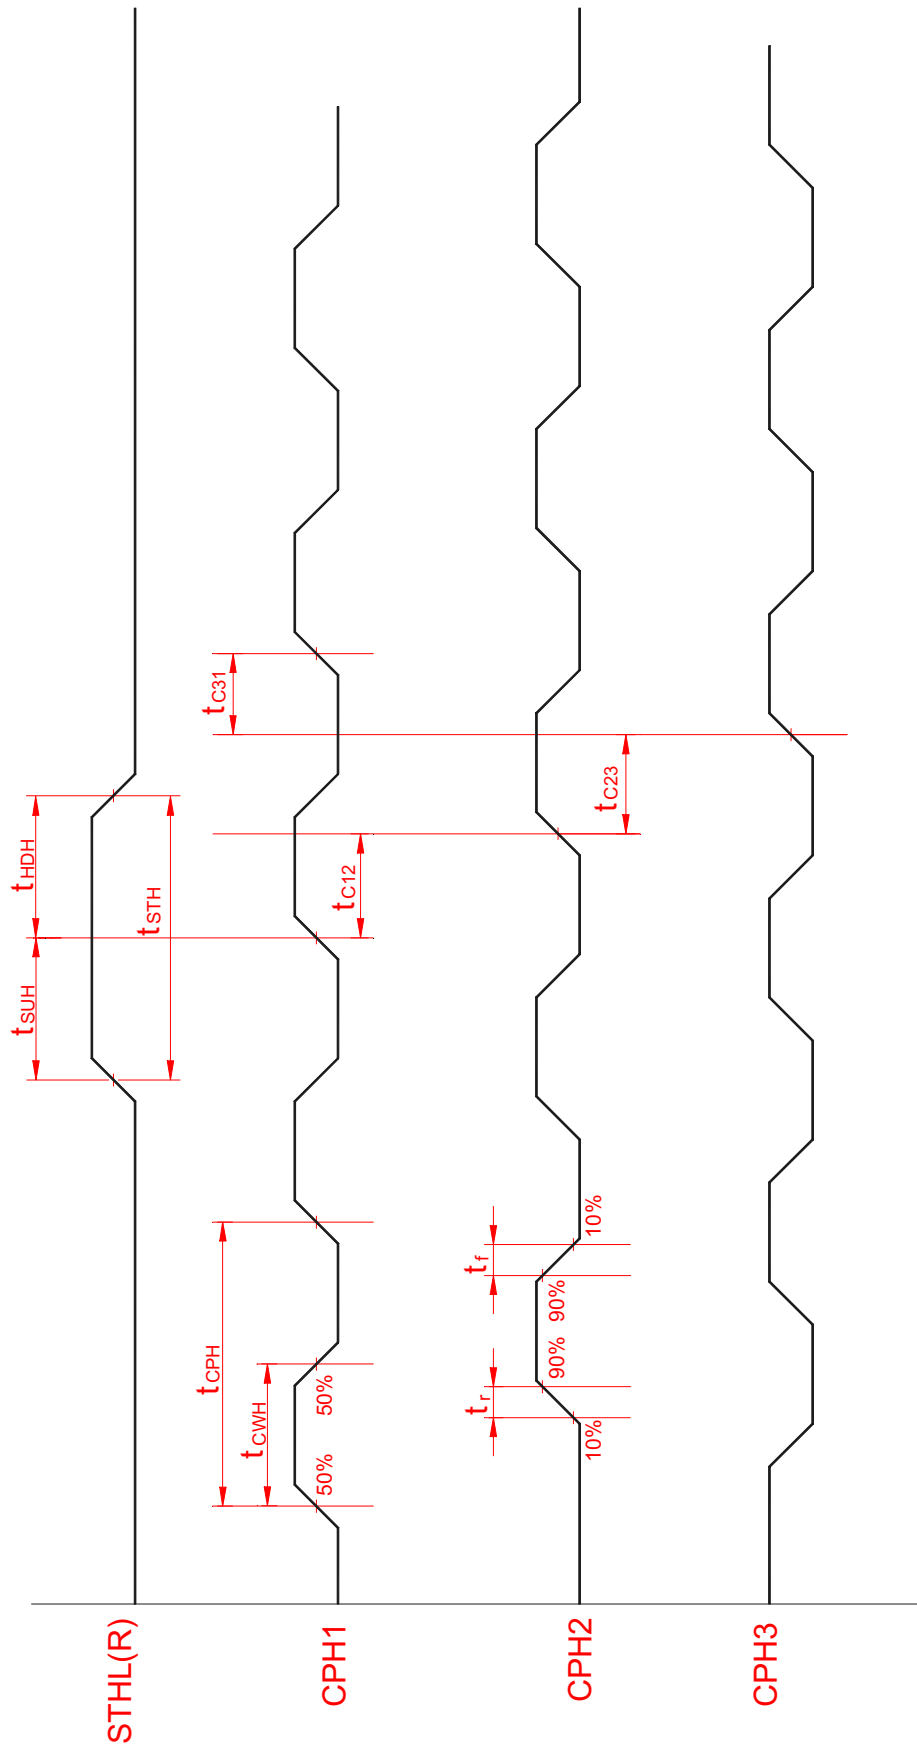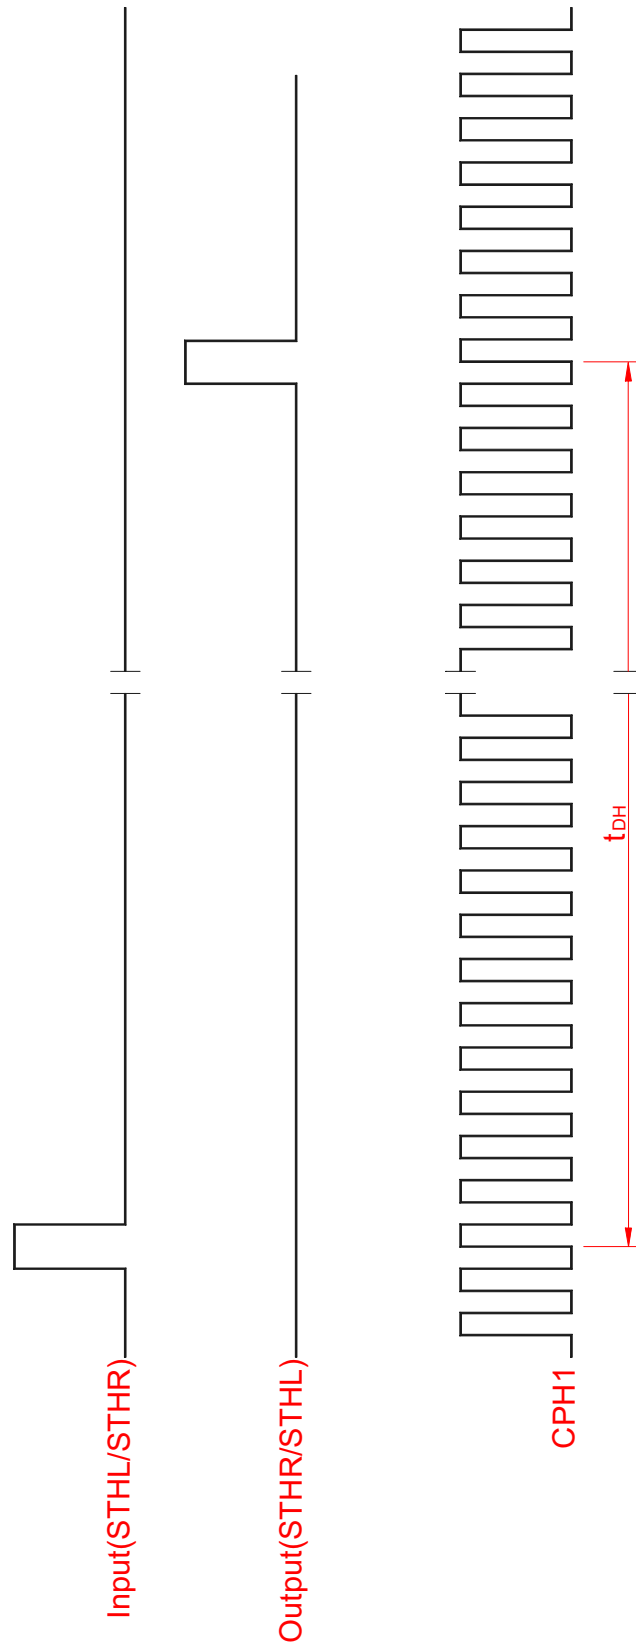
Fig.1- Outline dimension of TFT-LCD module(Rear Side)

Fig.2 Sampling clock timing

Fig.3 Horizontal display timing range

Input(STHL/STHR)
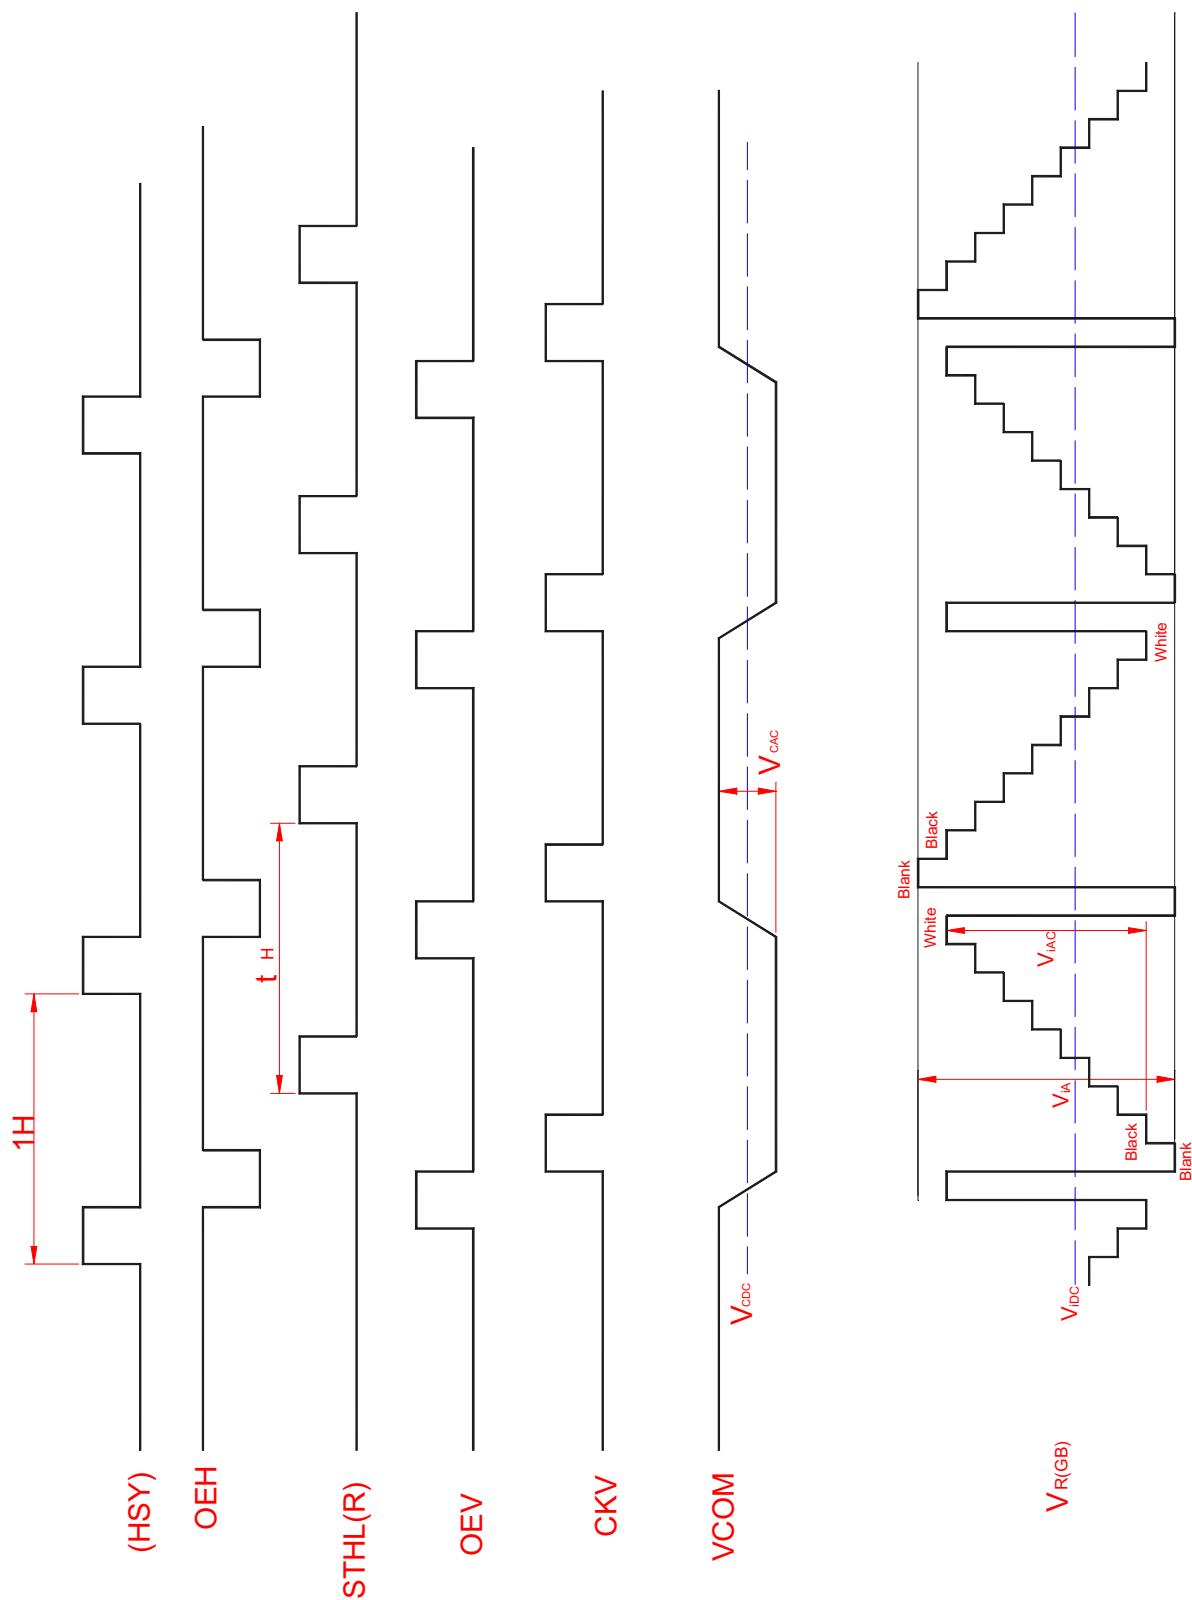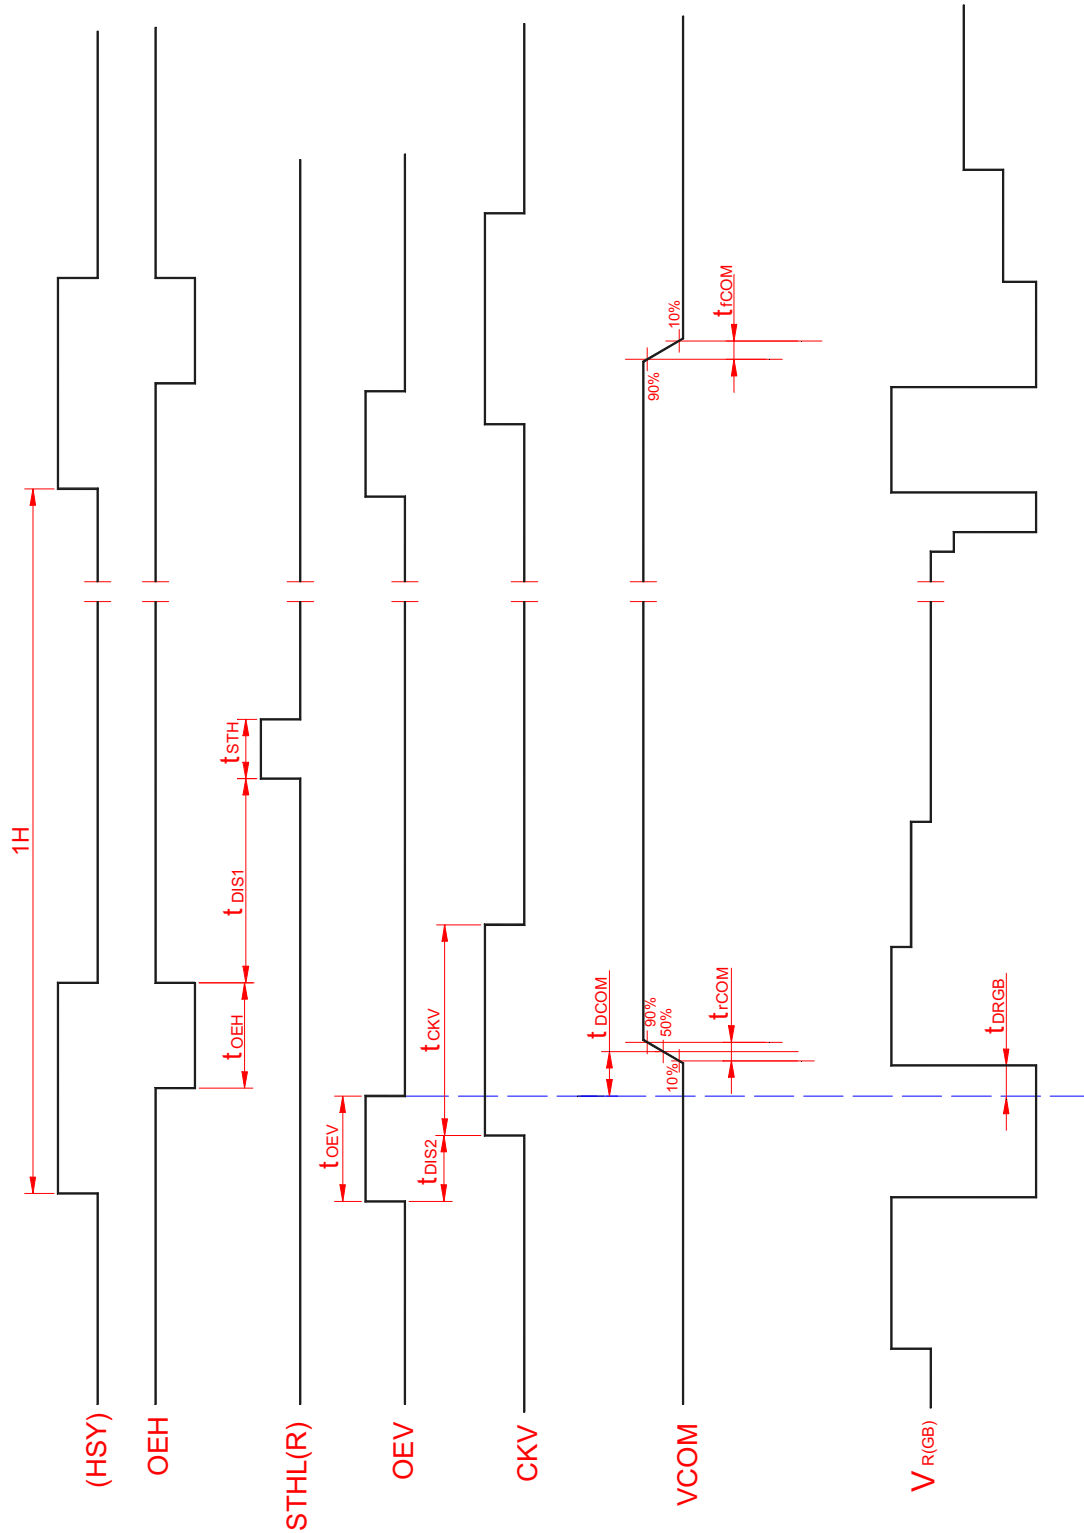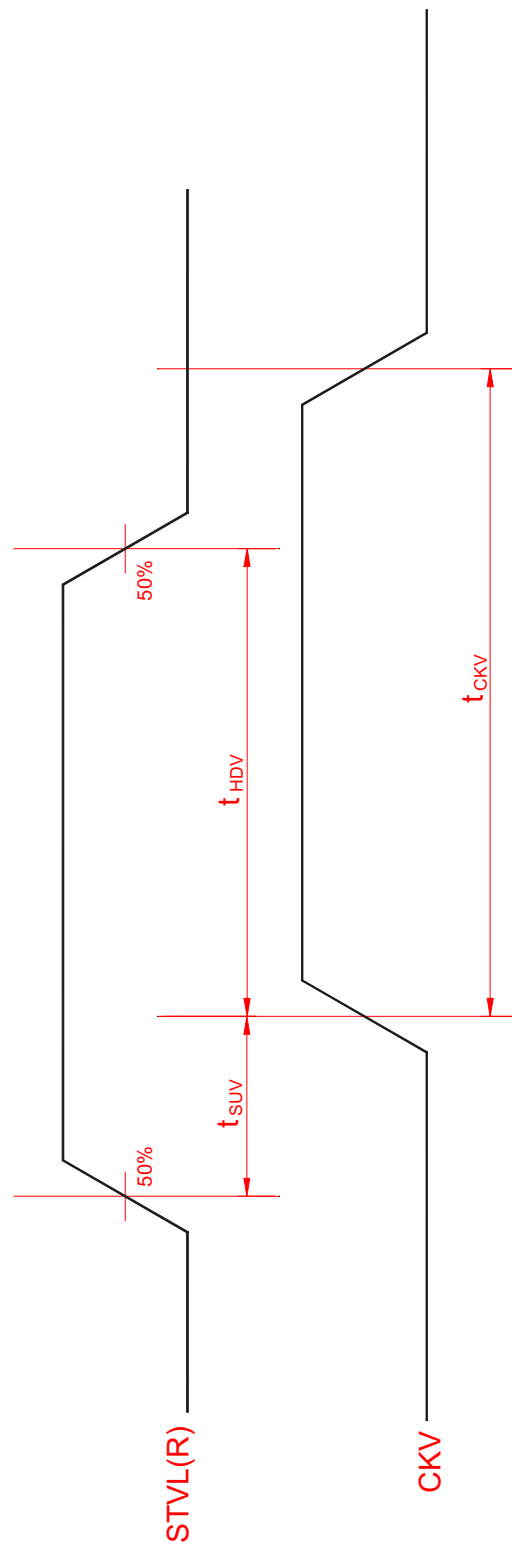
Output(STHR/STHL)

CPH1

t_{DH}

Fig.4-(a) Horizontal timing

Signals: (HSY), OEH, STHL(R), OEV, CKV, VCOM, V$_{R(GB)}$

1H, t$_H$, V$_{CAC}$, V$_{CDC}$, V$_{IDC}$, V$_{IAC}$, V$_A$

Blank, Black, White

Fig.4-(b) Detail horizontal timing

Note: The falling edge of OEV should be synchronized with the falling edge of OEH

Fig.5 Vertical shift clock timing

STVL(R)

CKV

t_{HDV}

t_{SUV}

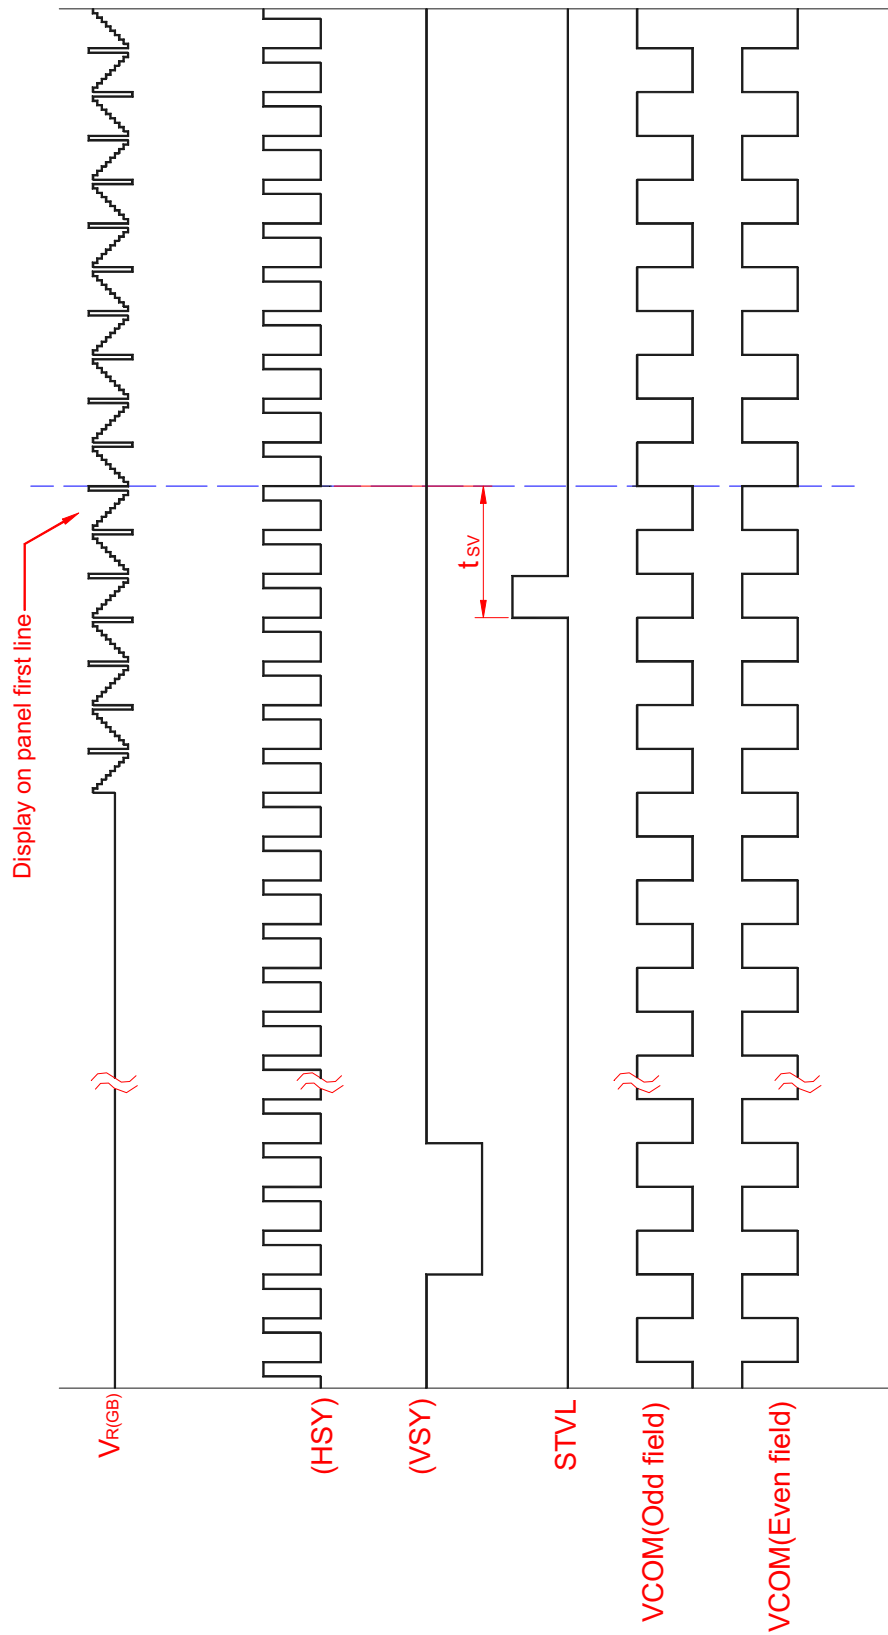t_{CKV}

50%

Fig.6-(a) Vertical timing (From up to down)

$V_{R(GB)}$

(HSY)

(VSY)

STVL
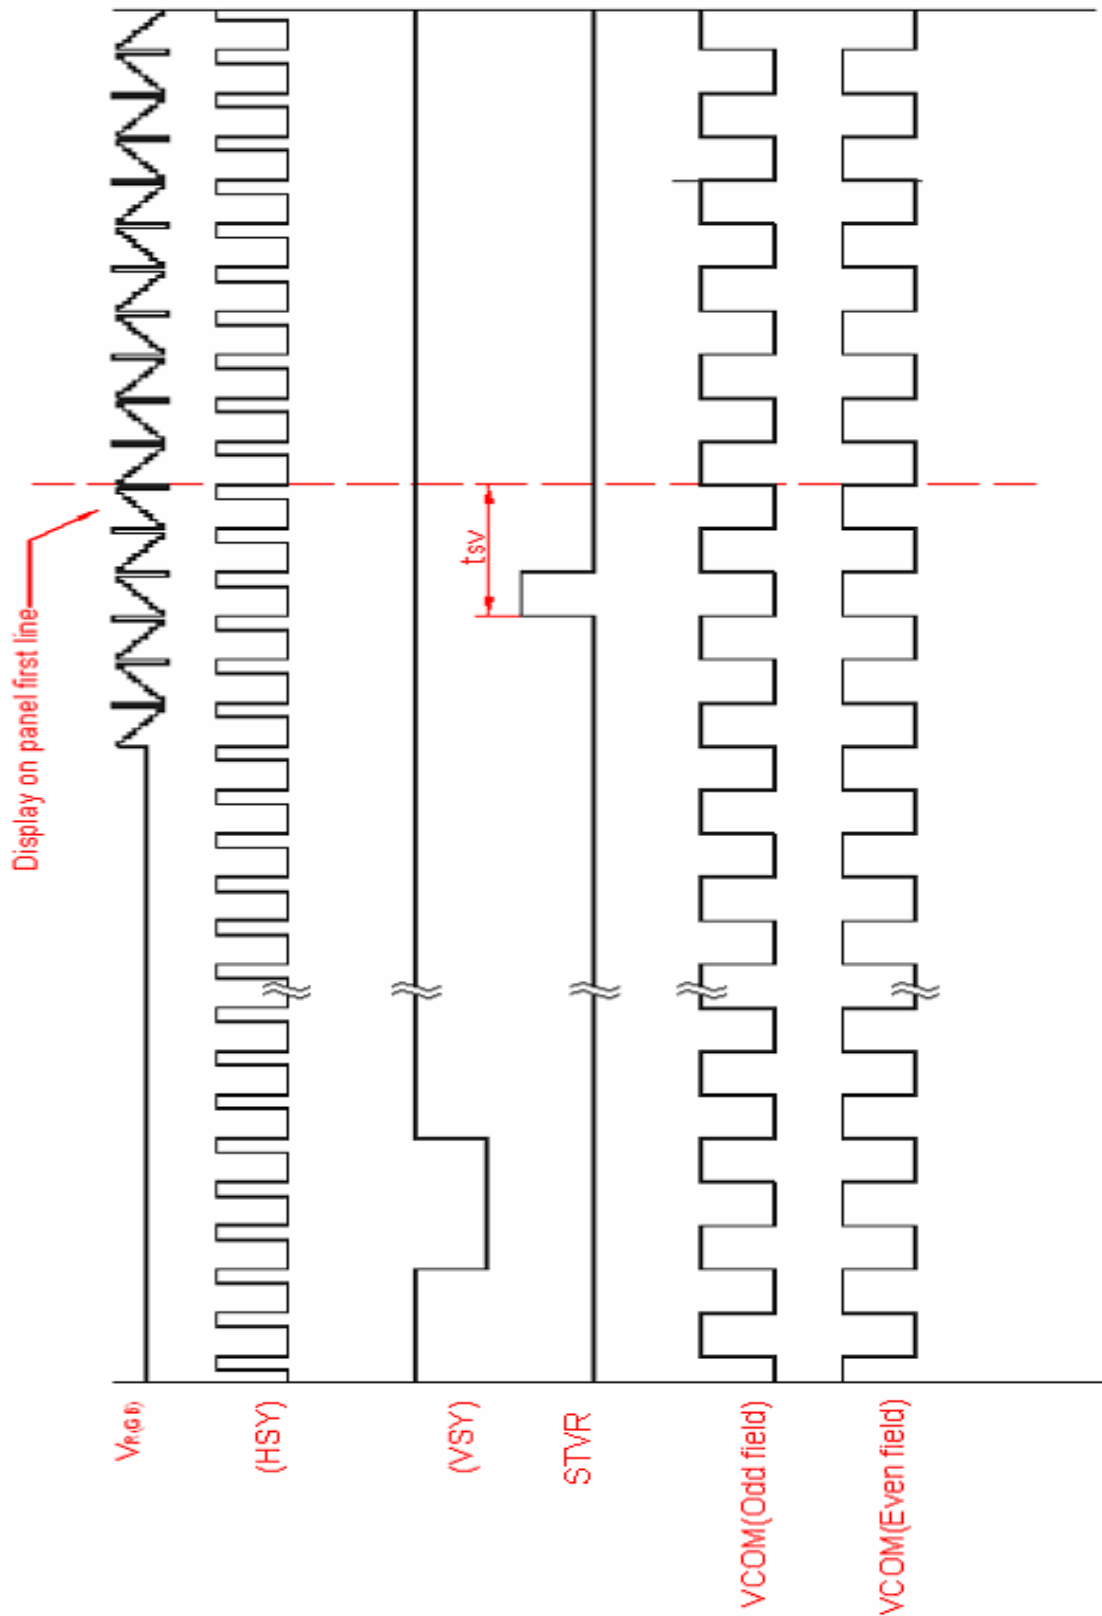
VCOM(Odd field)

VCOM(Even field)

Display on panel first line

t_{SV}

Fig.6-(b) Vertical timing (From down to up)