SAMSUNG

ELECTRONICS

TO :

DATE : June 19, 2009

SAMSUNG TFT-LCD

MODEL NO. : LTN141W1-L05

NOTE : Extension code [-2]
→ LTN141W1-L05-
Surface type [**ARC150T**]
Green product (Complied with RoHS requirement)

Any Modification of Spec is not allowed without SEC' permission

SAMSUNG ELECTRONICS CO., LTD.

wise view™

CONTENTS

김대현03071827129212261 20090619131408

REVISION HISTORY

Date	Revision No.	Page	Summary		
June. 19. 2009	P00	All	LTN141W1-L05 Model spec was issue first.		

Doc.No.	LTN141W1-L05	**Rev.No**	04-P00-G-090619	**Page**	3 / 29

GENERAL DESCRIPTION

DESCRIPTION

LTN141W1-L05 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight unit. The resolution of a 14.1" contains 1,280 x 800 pixels and can display up to 262,144 colors. 6 O'clock direction is the Optimum viewing angle.

FEATURES

- Thin and light weight
- High contrast ratio, high aperture structure
- Wide XGA (1280x800 pixels) resolution
- Fast Response Time
- Low power consumption
- Single CCFL
- DE (Data enable) only mode.
- 3.3V LVDS Interface
- On board EDID chip
- Auto Recovery Function
- RoHS Compliance

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC.

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	303.36(H) x 189.6(V) (14.1" diagonal)	mm	
Driver element	a-Si TFT active matrix		
Display colors	262,144		
Number of pixel	1280 x RGB(3) x 800	pixel	16 : 10
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.2370(H) x 0.2370(V) (TYP.)	mm	
Display Mode	Normally white		
Surface treatment	Haze 42, Hard-Coating 2H, ARC150T		

김대현03071827129212261 20090619131408

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	319.0	319.5	320.0	mm	
	Vertical (V)	205.0	205.5	206.0	mm	
	Depth (D)	-	-	5.5	mm	
Weight		-	400	420	g	

1. ABSOLUTE MAXIMUM RATINGS

1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	T_{STG}	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	T_{OPR}	0	50	°C	(1)
Shock (non-operating)	Snop	-	210	G	(2),(5)
			50		(3),(5)
Vibration (non-operating)	Vnop	-	2.41	G	(4),(5)

Note (1) Temperature and relative humidity range are shown in the figure below.
   95 % RH Max. (40 °C $\geq$ Ta)
   Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.
(2) 3ms, half sine wave, one time for $\pm$X,$\pm$Y,$\pm$Z.
(3) 18ms, Trapezoidal wave, one time for $\pm$X,$\pm$Y,$\pm$Z.
(4) 5~500 Hz, Random vibration,   30 min for X,Y,Z.
(5) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be
   hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Relative Humidity (%RH)

Temperature (°C)

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	5 / 29
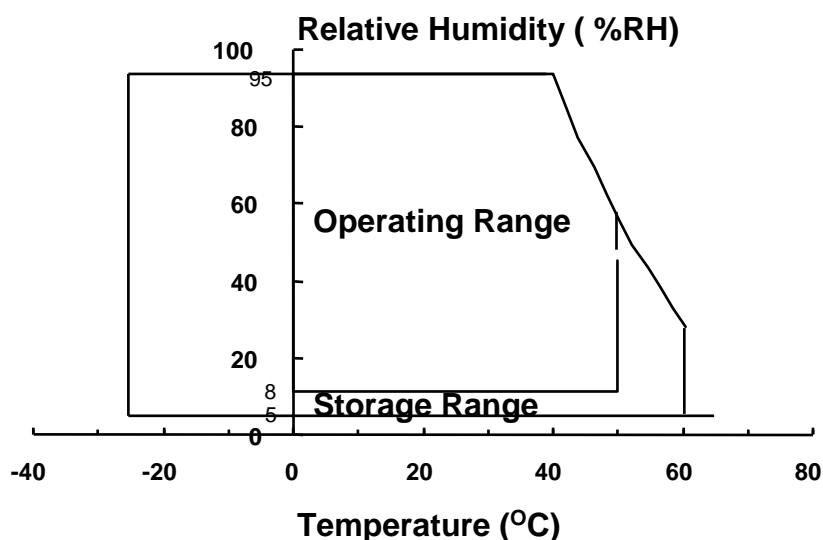
1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

V_{DD} =3.3V, V_{SS} = GND = 0V

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	V_{DD} - 0.3	V_{DD} + 0.3	V	(1)
Logic Input Voltage	V_{IN}	V_{DD} - 0.3	V_{DD} + 0.3	V	(1)

NOTE (1) Within Ta ($25 \pm 2\,^{\circ}C$)

(2) BACK-LIGHT UNIT

Ta = $25 \pm 2\,°C$

Item	Symbol	Min.	Max.	Unit	Note
Lamp Current	I_L	2.0	7.0	mArms	(1)
Lamp frequency	F_L	40	80	kHz	(1)

NOTE (1) Permanent damage to the device may occur if maximum values are exceeded.
Functional operation should be restricted to the conditions described under Normal Operating
Conditions.

2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5). Measuring equipment : TOPCON BM-5A and PR-650

* Ta = 25 ± 2 °C, V_{DD}=3.3V,   fv= 60Hz, f_{DCLK} = 68.9MHz, I_L = 6.0 mArms

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR	Normal Viewing Angle $\phi = 0$ $\theta = 0$	-	300	-	-	(1), (2), (5)
Response Time at 25°C	Rising	T_R+T_f		-	25	35	msec	(1), (3)
	Falling							
Average Luminance of White (center)		$Y_{L,AVE}$		160	185	-	cd/m²	I_L=6.0mA (1), (4)
Color Chromaticity (CIE)	Red	R_X		0.562	0.590	0.618	-	(1), (5) PR-650
		R_Y		0.320	0.340	0.360		
	Green	G_X		0.292	0.320	0.348		
		G_Y		0.530	0.550	0.570		
	Blue	B_X		0.124	0.152	0.180		
		B_Y		0.110	0.130	0.150		
	White	W_X		0.285	0.313	0.341		
		W_Y		0.309	0.329	0.349		
Viewing Angle	Hor.	θ_L	CR ≥ 10	-	45	-	Degrees	(1), (5) BM-5A
		θ_H		-	45	-		
	Ver.	ϕ_H		-	20	-		
		ϕ_L		-	45	-		
13 Points White Variation		δ_L		60%	-	-	-	(6)
5 Points White Variation		δ_L		80%	-	-	-	(6)

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	7	/ 29

Note 1) Definition of Viewing Angle : Viewing angle range(10 ≤ C/R, 100 ≤ C/R)

Normal Line
$\phi = 0º, \theta = 0º$

θ_L

θ_R

ϕ_L ϕ_H

$\theta_L = 90º$ x

12 O'clock direction
$\phi_H = 90º$

y

6 O'clock direction
$\phi_L = 90º$

y'

x'

$\theta_R = 90º$
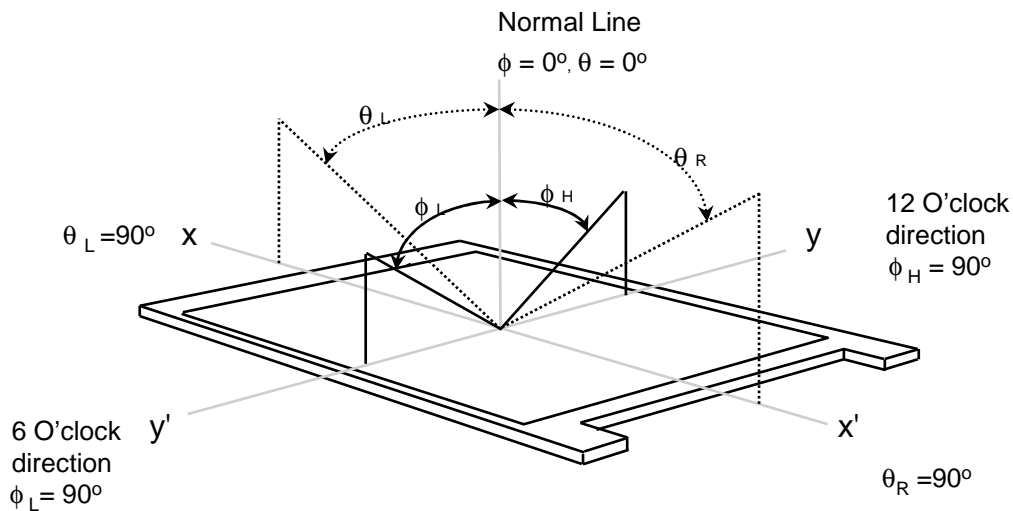
Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points(4, 5, 7, 9, 10)

$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : ④ , ⑤ , ⑦ , ⑨ , ⑩ at the figure of Note (6).

Note 3) Definition of Response time :

Gray 32(TFT OFF)　　　Gray 48 (TFT ON)　　　Gray 32(TFT OFF)

Display data　White(TFT OFF)　　Black(TFT ON)　　White(TFT OFF)

T_R　　　　　　　T_F

100%
90%

Optical Response

10%
0%

Time
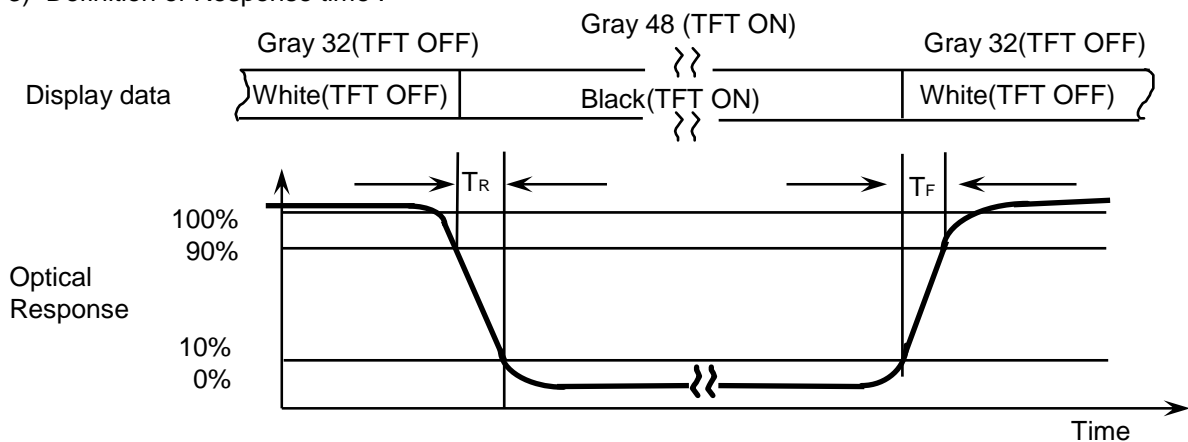
Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

(320)　(640)　(960)

VIEW AREA

Average Luminance of White ($Y_{L,AVE}$)

$$Y_{L,AVE} = \frac{Y_{L4} + Y_{L5} + Y_{L7} + Y_{L9} + Y_{L10}}{5}$$

⑩　　　⑨　(200)

⑦　(400)

⑤　　　④　(600)
(lines)

◯ : test point

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	8 / 29

김대현03071827129212261 20090619131408
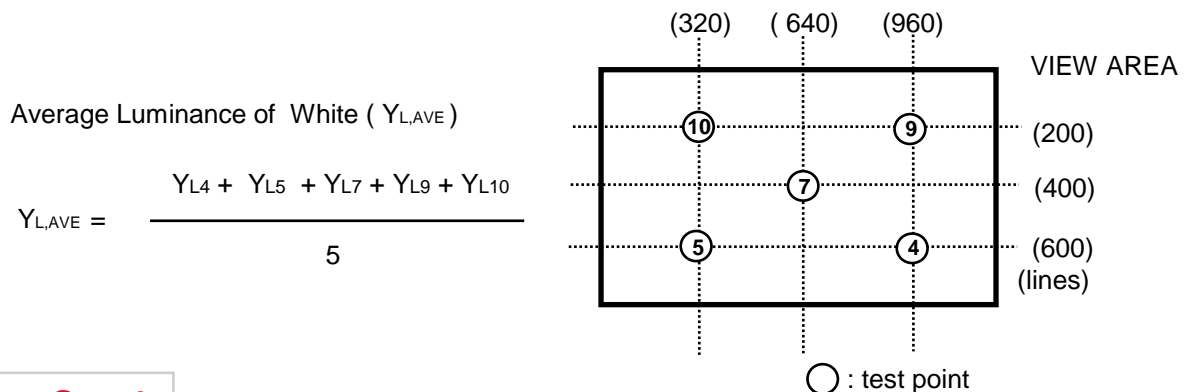
Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless,and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.
Lamp current : 6.0mA
Environment condition : Ta = 25 ± 2 °C

Photo-detector
(TOPCON SR-3)

Field = 2°

50 cm

TFT-LCD module

LCD panel

Center of the screen

[Optical characteristics measurement setup]
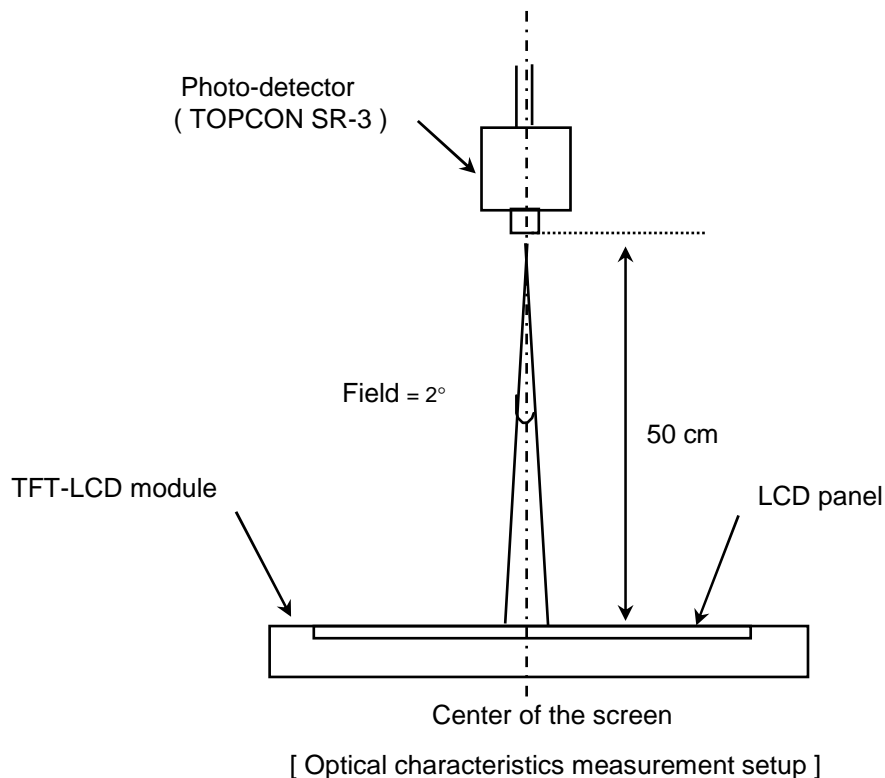
Note 6) Definition of 13 points white variation (δ_L), CR variation(C_{VER}) [(1) ~ (13)]

$$\delta_L \; = \; \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

10mm   **10mm**

320   640   960

10mm

13   12   11

10   9   200

8   7   6   400   ◯ : test point

5   4   600 (lines)

3   2   1

10mm

| **Doc.No.** | LTN141W1-L05 | **Rev.No** | 04-P00-G-090619 | **Page** | 9 / 29 |
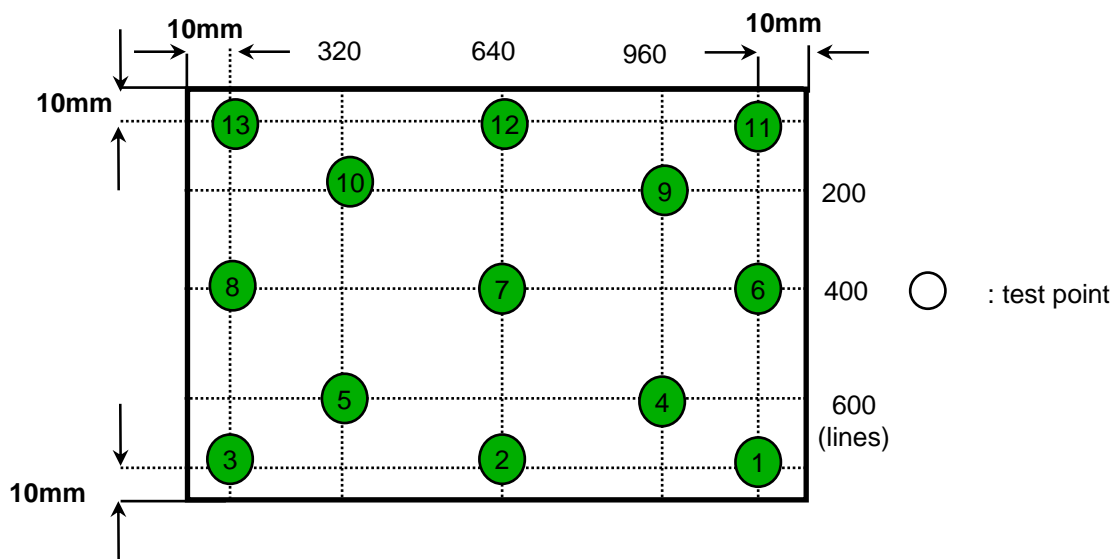
3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta= 25 ± 2°C

ITEM			SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Voltage of Power Supply			V_{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold		High	V_{IH}	-	-	+100	mV	V_{CM}=+1.2V
		Low	V_{IL}	-100	-	-	mV	
Vsync Frequency	60Hz	Hsync Freq	F_H	46.38	48.96	60	KHz	
		Main Freq	F_{DCLK}	60.99	76.77	105	MHz	
	50Hz	Hsync Freq	F_H	38.65	40.80	50	KHz	
		Main Freq	F_{DCLK}	50.8	63.98	87.5	MHz	
	40Hz	Hsync Freq	F_H	30.9	32.92	40	KHz	
		Main Freq	F_{DCLK}	40.66	47.4	70	MHz	
Rush Current			I_{RUSH}	-	-	1.5	A	(4)
Current of Power Supply		White	I_{DD}	-	360	-	mA	(2),(3)*a
		Mosaic		-	390	-	mA	(2),(3)*b
		WinXP Pattern		-	390	-	mA	(2),(3)*c
		Max Pattern		-	465	485	mA	(2),(3)*d

Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)

(2) f_V = 60Hz, f_{DCLK} = 71.11MHZ, V_{DD} = 3.3V , DC Current.

(3) Power dissipation pattern

*a) White Pattern

VIEW AREA
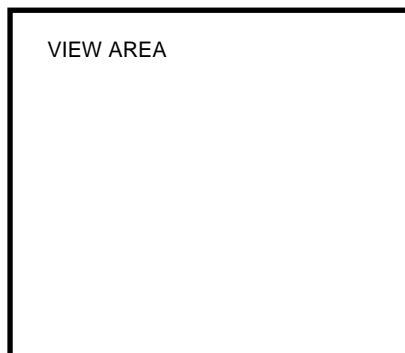
*b) Mosaic Pattern

Display Brightest Gray Level →

Display Darkest Gray Level →
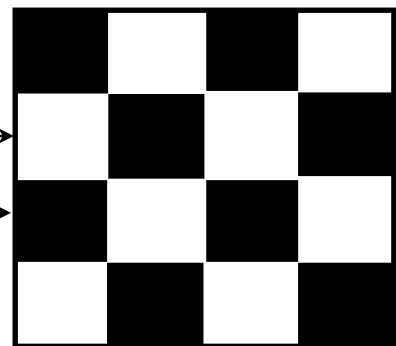
*c) WinXP Pattern

*d) 1dot Inversion Pattern

R	B	G	R	B	G	R
G	R	B	G	R	B	G
R	B	G	R	B	G	R
G	R	B	G	R	B	G
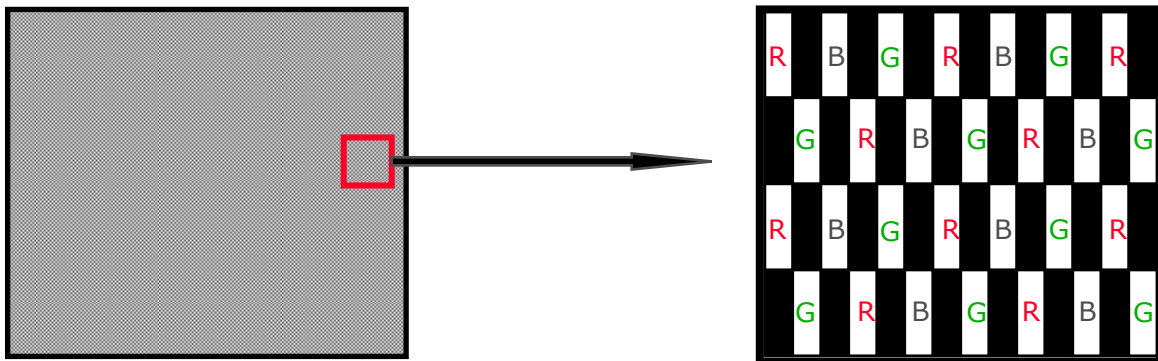
4) Rush current measurement condition

3.3V

M1
2SK1059

R1
47K

FUSE

C1
1uF

V_DD (LCD INPUT)

CONTROL SIGNAL
(HIGH to LOW)

R2
1K

M2
2SK1399

12V

R3
47K

C2
10000pF

C3
1uF

V_DD rising time is 470us

3.3V

0.9V_DD

0.1V_DD

GND

470us

| Doc.No. | LTN141W1-L05 | Rev.No | 04-P00-G-090619 | Page | 11 / 29 |
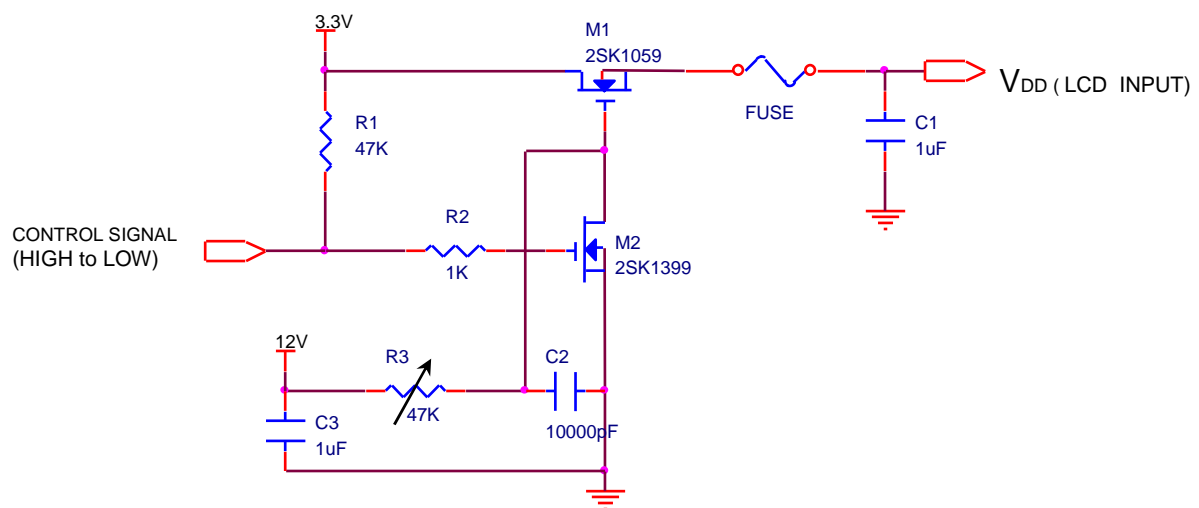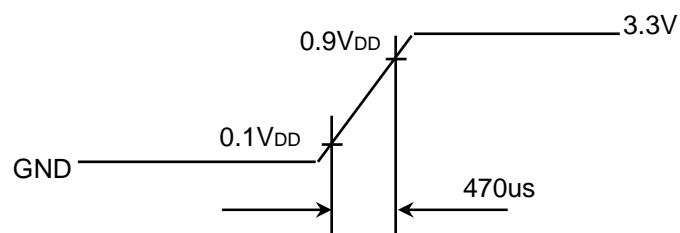
3.2 BACK-LIGHT UNIT

The backlight system is an edge-lighting type with a single CCFT (Cold Cathode Fluorescent Tube).
The characteristics of a single lamp are shown in the following table.

- INVERTER : Ambit / Sumida   Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Current	I_L	3.0 (Min duty=15%)	6.0	6.5	mArms	(1)
Lamp Voltage	V_L	-	665	-	Vrms	I_L = 6.0mA
Frequency	f_L	40	60	65	KHz	(2)
Power Consumption	P_L	-	4.0	-	W	(3) I_L = 6.0mA
Operating Life Time	Hr	10,000	-	-	Hour	(4)
Startup Voltage	V_S	-	-	1120	Vrms	25°C, (5)
				1345	Vrms	0°C, (5)
Leakage Current	I_{leak}	-	-	2.0	mArms	(6)

Note) The waveform of the inverter output voltage must be area symmetric and the design of the inverter must have specifications for the modularized lamp.

The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter(miss lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Note (1) Lamp current is measured with a high frequency current meter as shown below.

```
                        ┌───┐   HOT : ( Pink )   ┌──────────┐
┌──────────┐            │ 1 │──────────────────  │          │
│   LCD    │────────────┤   │                    │ INVERTER │
│  MODULE  │────────────┤ 2 │   COLD : ( White ) │          │
└──────────┘            └───┘──────(A)────────── └──────────┘
```
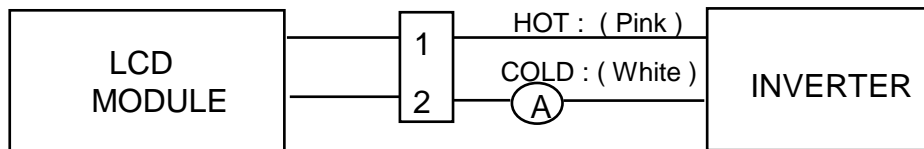
(2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

(3) Refer to $I_L \times V_L$ to calculate.

(4) Life time (Hr) of a lamp can be defined as the time in which it continues to operate under the condition Ta= 25 ± 2 °C and I_L = 6.0 mArms until one of the following event occurs.
   1. When the brightness becomes 50% or lower than the original.
   2. When the Effective ignition length becomes 80% or lower than the original value. (Effective ignition length is defined as an area that has less than 70% brightness compared to the brightness in the center point.)
   3. Lamp unit only.

(5) The inverter open voltage - this voltage should be measured after ballast capacitor- have to be larger than the lamp startup voltage, otherwise backlight may has blinking for a moment after turns on or not be turned on.

   If an inverter has shutdown function it should keep its open voltage for longer than 1 second even if lamp connector open.

(6) Leakage current is defined as below.

   $I_{leak} = I_{HOT} - I_{COLD}$

Doc.No.	LTN141W1-L05	**Rev.No**	04-P00-G-090619	**Page**	12 / 29

4. BLOCK DIAGRAM

4.1 TFT LCD Module

I²C bus → EDID EEPROM

Input- Connector
FI-XB30SRL-HF11
or Compatible

LVDS → LVDS Input/RSDS Output Timing Controller → RSDS

Source Driver IC

14.1" WXGA (1280*3*800) TFT-LCD Panel

DC-DC Converter

Gamma Generator

VCOM Generator

SOURCE PCB

Gate Driver IC Integrated

Legend:
- Video Signal (green)
- Control Signal (purple)
- VCOM (yellow)
- Gamma (cyan)
- DVDD (red)
- AVDD (blue)
- Von/Voff (magenta)

4.2 BACK-LIGHT UNIT

Reflector

LAMP

1 HOT (Pink)

2 COLD(White)

Connector : BHSR-02VS-1

Note) The output of the inverter may change according to the material of the reflector.

김대현03071827129212261 20090619131408

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power (LVDS, Connector : JAE FI-XB30SRL-HF11 or compatible)
Mating Connector : JAE FI-X30M or compatible)

No.	Symbol	Function	Polarity	Remarks
1	VSS	Ground		
2	VDD	POWER SUPPLY +3.3V		
3	VDD	POWER SUPPLY +3.3V		
4	VEEDID	DDC 3.3V Power		
5	BIST	Panel BIST enable		
6	CLKEDID	DDC Clock		
7	DATAEDID	DDC data		
8	RxIN0-	LVDS Differential Data INPUT (R0-R5,G0)	Negative	
9	RxIN0+	LVDS Differential Data INPUT (R0-R5,G0)	Positive	
10	GND	Ground		
11	RxIN1-	LVDS Differential Data INPUT (G1-G5,B0-B1)	Negative	
12	RxIN1+	LVDS Differential Data INPUT (G1-G5,B0-B1)	Positive	
13	GND	Ground		
14	RxIN2-	LVDS Differential Data INPUT (B2-B5,Sync,DE)	Negative	
15	RxIN2+	LVDS Differential Data INPUT (B2-B5,Sync,DE)	Positive	
16	Vss	Ground		
17	ClkIN-	LVDS Differential Clock INPUT	Negative	
18	ClkIN+	LVDS Differential Clock INPUT	Positive	
19	Vss	Ground		
20	NC	No connect		
21	NC	No connect		
22	NC	No connect		
23	NC	No connect		
24	NC	No connect		
25	NC	No connect		
26	NC	No connect		
27	NC	No connect		
28	NC	No connect		
29	NC	No connect		
30	NC	No connect		

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	14 / 29

5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

LVDS

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RO0	12	TxIN11	GO5
45	TxIN1	RO1	13	TxIN12	BO0
47	TxIN2	RO2	15	TxIN13	BO1
48	TxIN3	RO3	16	TxIN14	BO2
1	TxIN4	RO4	18	TxIN15	BO3
3	TxIN5	RO5	19	TxIN16	BO4
4	TxIN6	GO0	20	TxIN17	BO5
6	TxIN7	GO1	22	TxIN18	Hsync
7	TxIN8	GO2	23	TxIN19	Vsync
9	TxIN9	GO3	25	TxIN20	DE
10	TxIN10	GO4	26	TxCLK IN	Clock

김대현030718271292212261 20090619131408

LVDS Interface

Graphics controller 18-bit

	Pin
RED0	44
RED1	45
RED2	47
RED3	48
RED4	1
RED5	3
GREEN0	4
GREEN1	6
GREEN2	7
GREEN3	9
GREEN4	10
GREEN5	12
BLUE0	13
BLUE1	15
BLUE2	16
BLUE3	18
BLUE4	19
BLUE5	20
Hsync	22
Vsync	23
Enable	25
CLOCK	26

DS90CF363 or compatible

JAE,FI-XB30SRL-HF11

Tx	Pin	Conn	Rx	
TxOUT0-	41	8	RxIN0-	100 Ω
TxOUT0+	40	9	RxIN0+	
TxOUT1-	39	11	RxIN1-	100 Ω
TxOUT1+	38	12	RxIN1+	
TxOUT2-	35	14	RxIN2-	100 Ω
TxOUT2+	34	15	RxIN2+	
TxCLKOUT-	33	17	RxCLK-	100 Ω
TxCLKOUT+	32	18	RxCLK+	

Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	16 / 29

5.3 BACK LIGHT UNIT

Connector : JST BHSR - 02VS -1
Mating Connector : SM02B-BHSS-1(JST)

Pin NO.	Symbol	Color	Function
1	HOT	Pink	High Voltage
2	COLD	White	Low Voltage

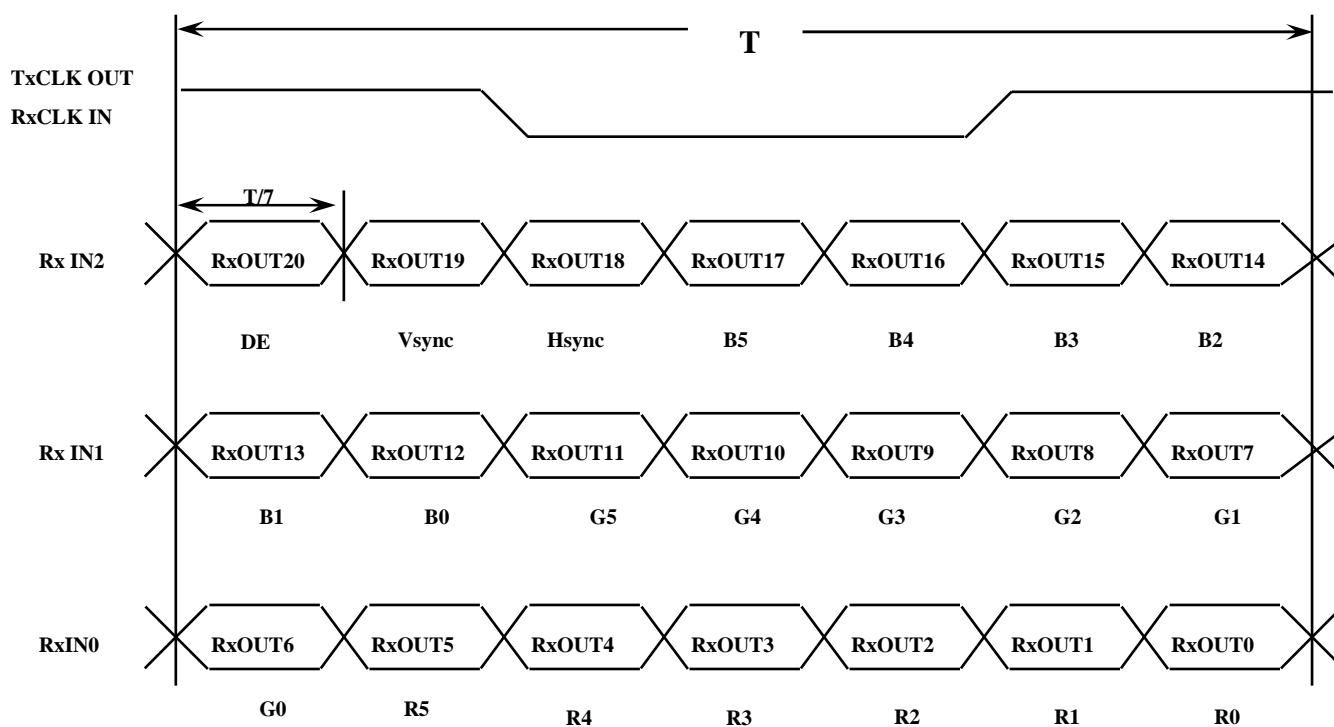## 5.4 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

김대현03071827129212261 20090619131408

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

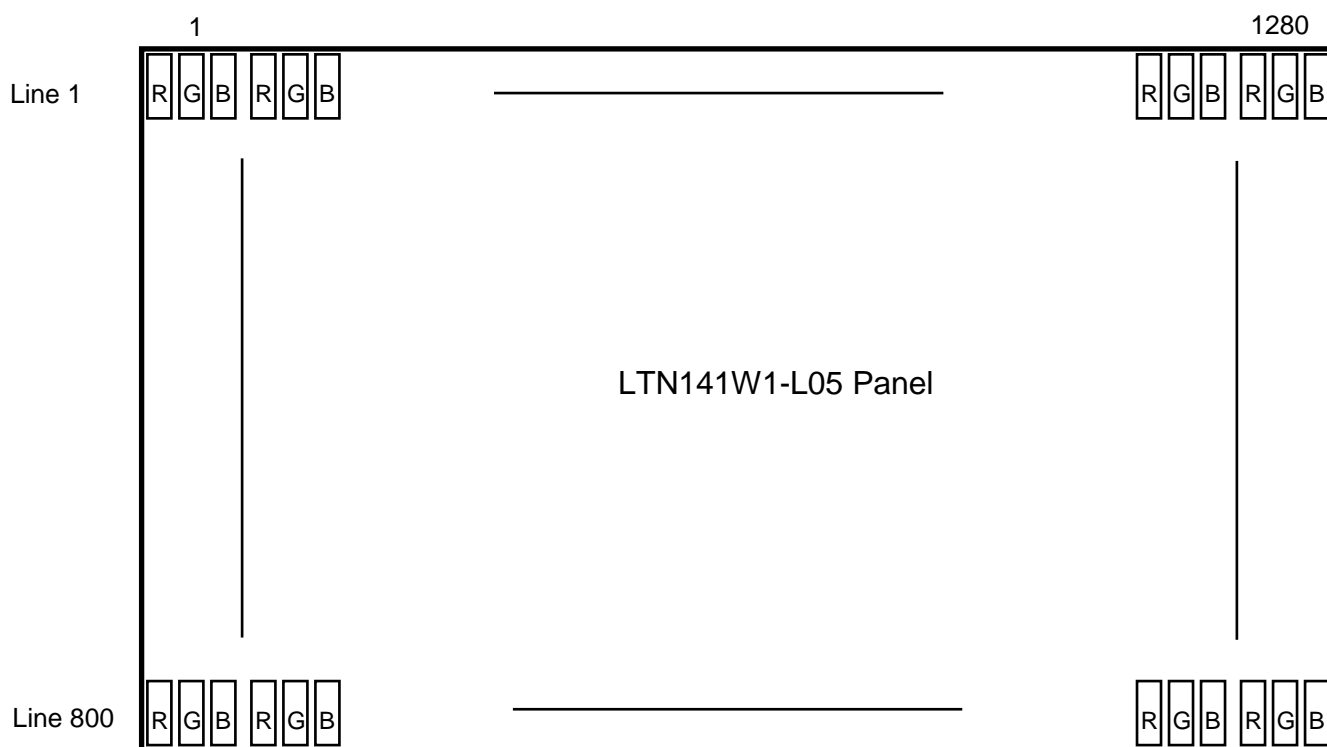| Color	Display	Data Signal																		Gray Scale Level
		Red						Green						Blue						
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	45	B5	
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	-
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	-
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	Dark	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
	↑	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R61
	Light	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R62
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R63
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	Dark	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	G1
	↑	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	G2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0	G61
	Light	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	G62
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	G63
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	Dark	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B1
	↑	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	B2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	B61
	Light	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	B62
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B63

Note 1) Definition of gray :
    Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)
Note 2) Input signal: 0 =Low level voltage, 1 =High level voltage

Samsung Secret

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	18 / 29

5.6 Pixel Format in the display

Line 1 | R | G | B | R | G | B | ... | R | G | B | R | G | B

LTN141W1-L05 Panel

Line 800 | R | G | B | R | G | B | ... | R | G | B | R | G | B

| Doc.No. | LTN141W1-L05 | Rev.No | 04-P00-G-090619 | Page | 19 / 29 |

6. INTERFACE TIMING

6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	773	823	1000	Lines	-
Vertical Active Display Term	Display Period	TVD	-	800	-	Lines	-
One Line Scanning Time	Cycle	TH	1315	1440	1750	Clocks	-
Horizontal Active Display Term	Display Period	THD	-	1280	-	Clocks	-

6.2 Timing diagrams of interface signal

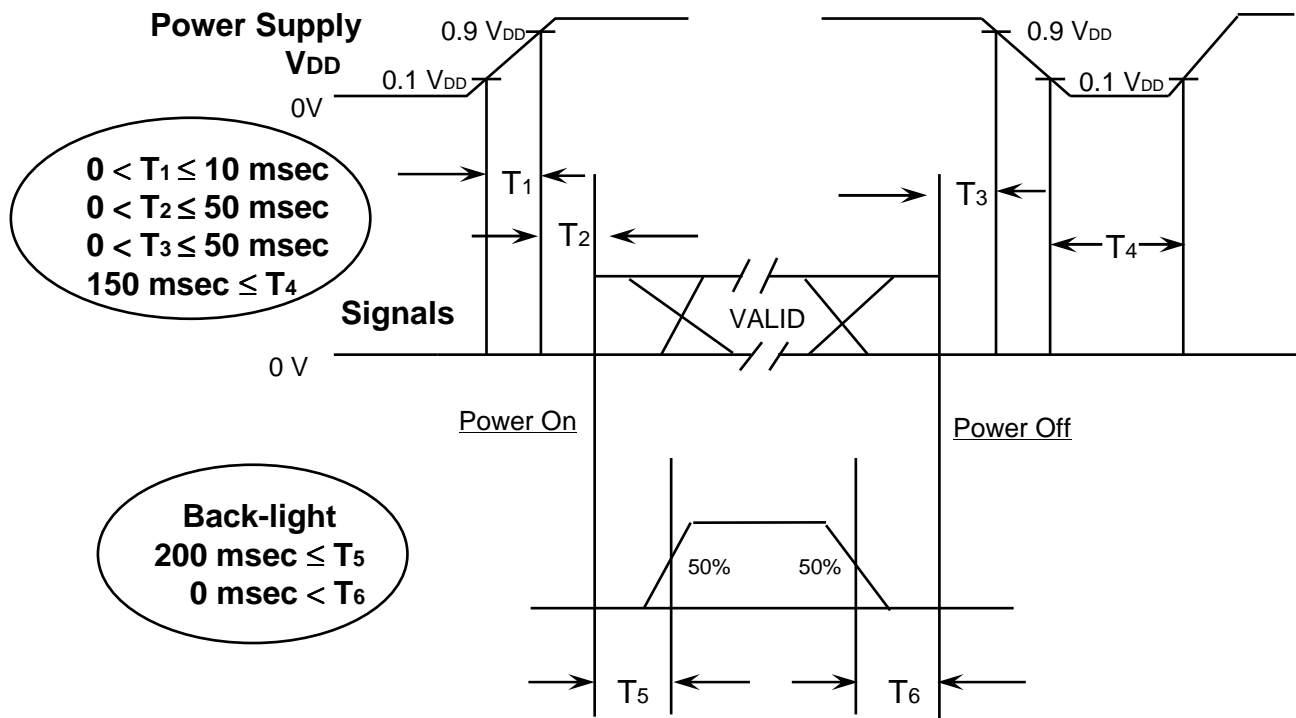| Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	20 / 29
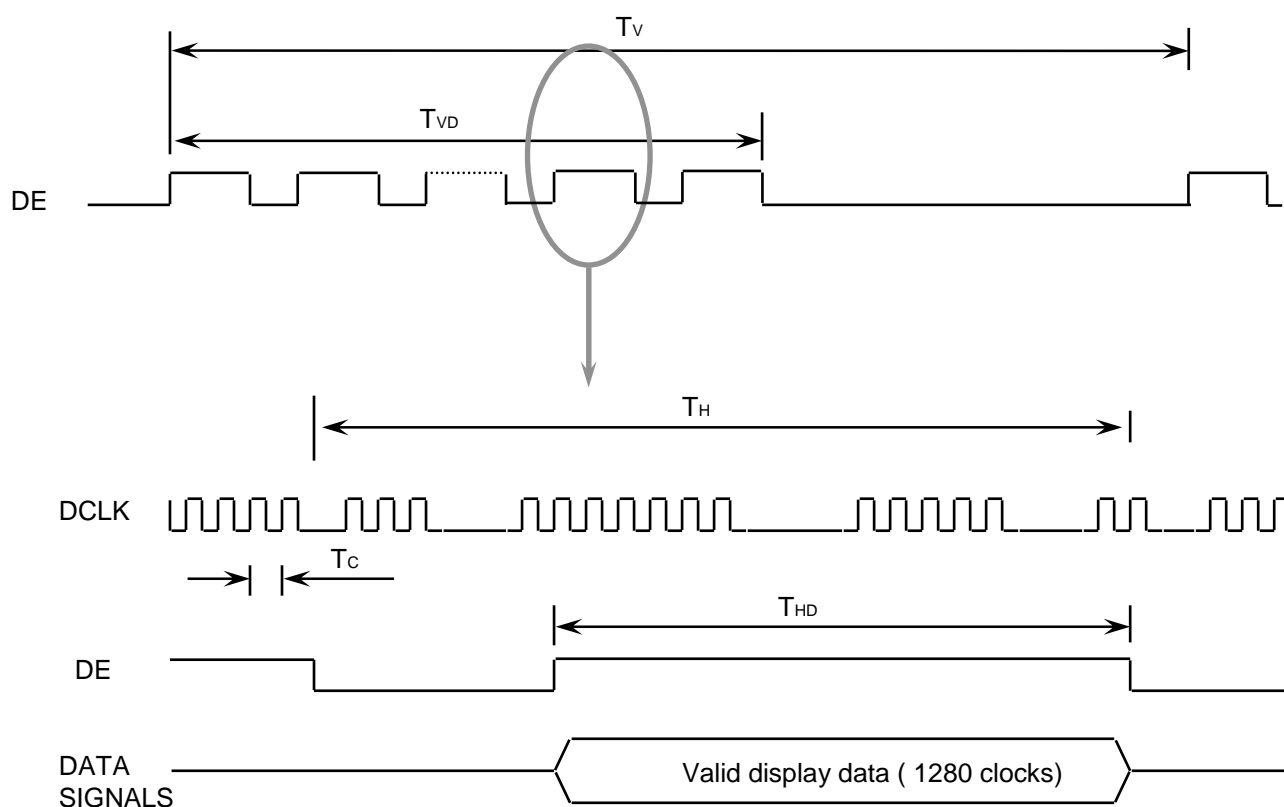
6.3 Power ON/OFF Sequence

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

Power ON/OFF Sequence

$0 < T_1 \leq 10$ msec
$0 < T_2 \leq 50$ msec
$0 < T_3 \leq 50$ msec
150 msec $\leq T_4$

Back-light
200 msec $\leq T_5$
0 msec $< T_6$

T1 : Vdd rising time from 10% to 90%
T2 : The time from Vdd to valid data at power ON.
T3 : The time from valid data off to Vdd off at power Off.
T4 : Vdd off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

NOTE.

(1) The supply voltage of the external system for the module input should be the same as the definition of VDD.

(2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.

(3) In case of VDD = off level, please keep the level of input signals on the low or keep a high impedance.

(4) T4 should be measured after the module has been fully discharged between power off and on period.

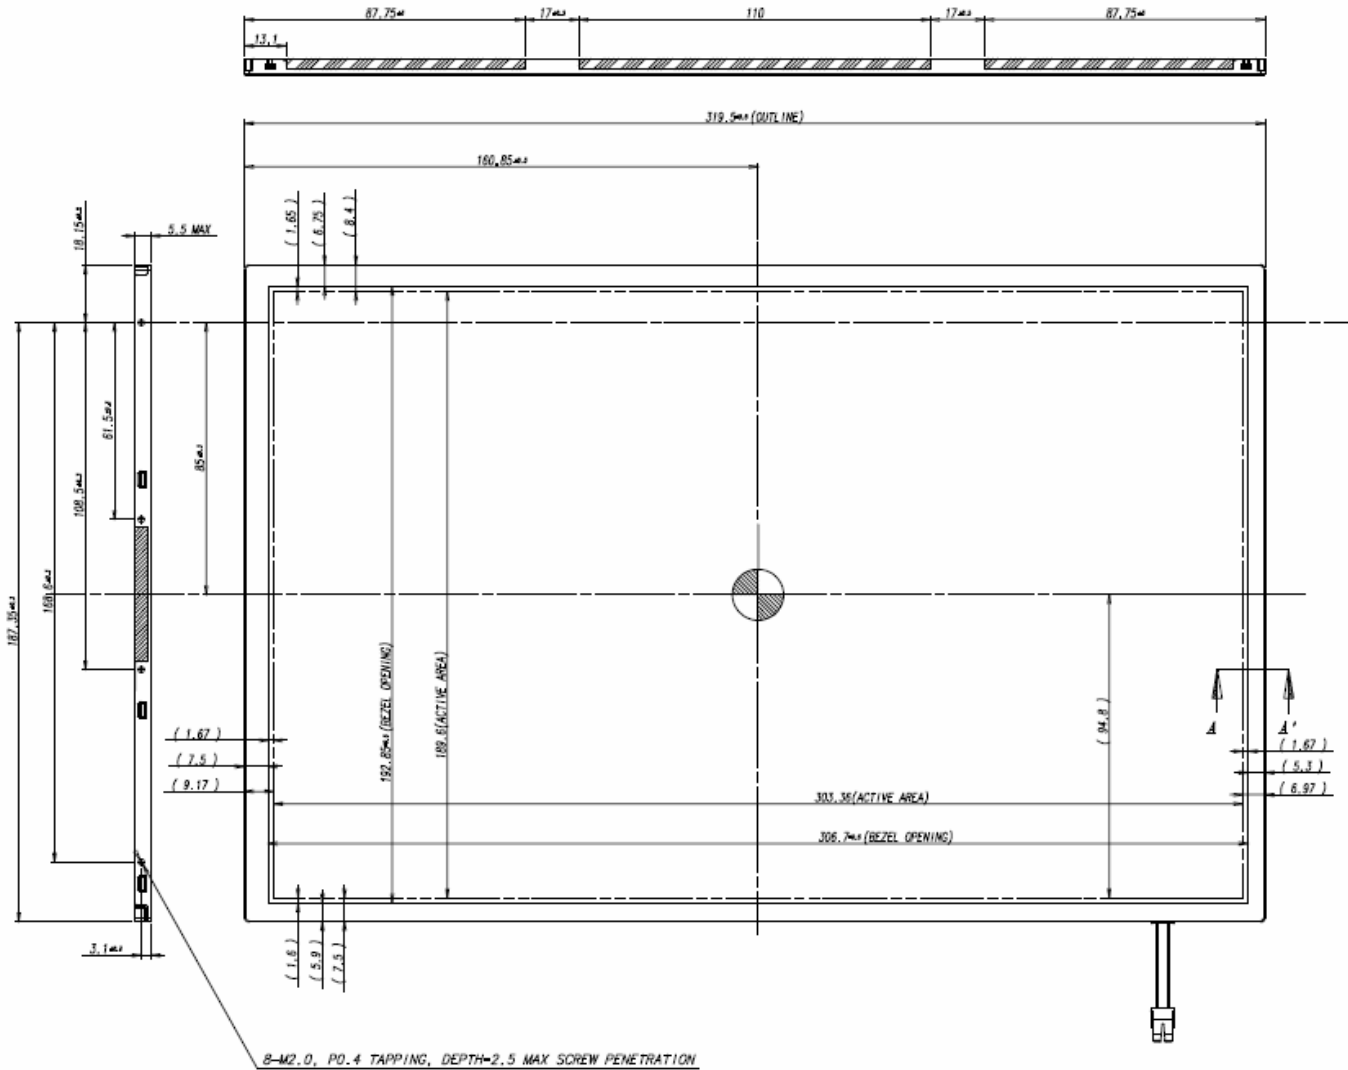(5) Interface signal shall not be kept at high impedance when the power is on.

[Refer to the next page]

김대현030718271292122261 20090619131408

SAMSUNG
LTN141W1-L05
MADE IN CHINA

ATTENTION - Locking connector

205.5mm (OUTLINE)

30.1mm (FROM USER HOLE)

108.5mm

30mm

25mm

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	23 / 29

김대현030718271292122261 20090619131408
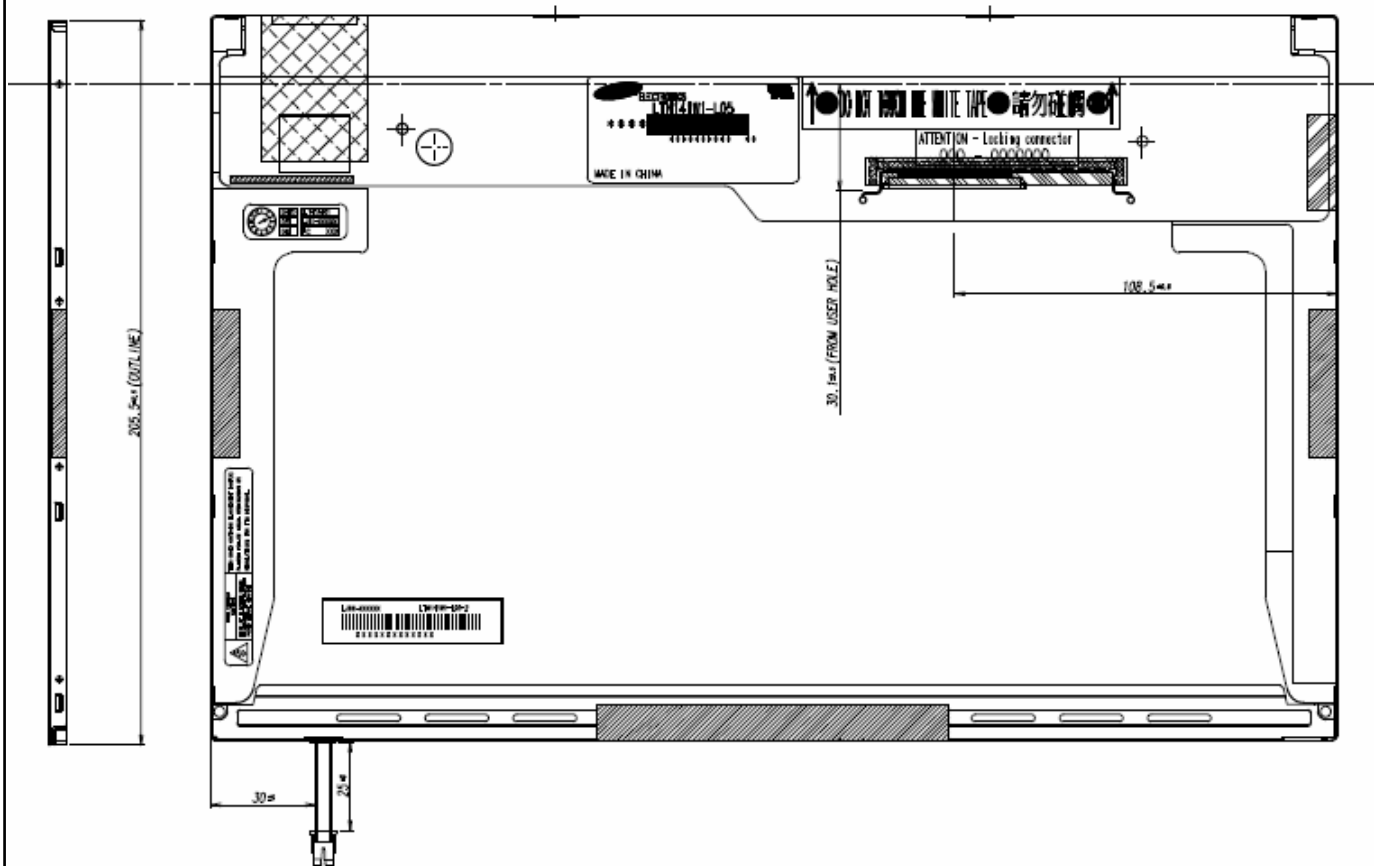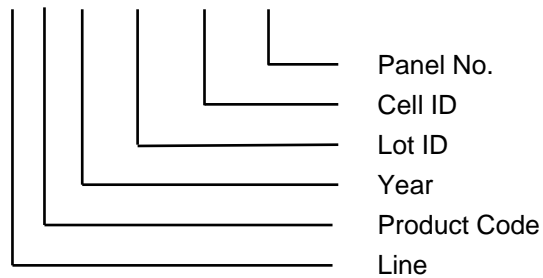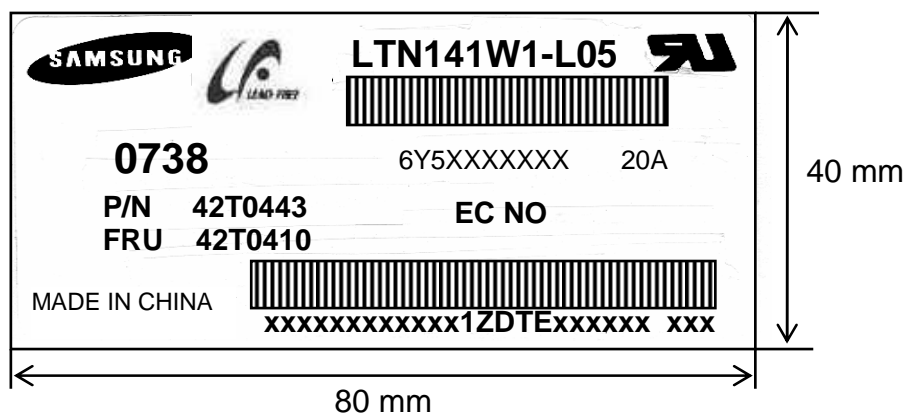
8. Product Markings and Others

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Parts number : LTN141W1-L05
(2) Revision : One letter
(3) Control code : One letter
(4) Lot number : 6 Y 7 XXX XX XX

```
                              Panel No.
                              Cell ID
                              Lot ID
                              Year
                              Product Code
                              Line
```

NOTE 1). This code indicating year is omitted in the products of Chun-an site.

(5) Product Label Definition


```
SAMSUNG   LEAD-FREE   LTN141W1-L05   UL

0738              6Y5XXXXXXX    20A       40 mm
P/N    42T0443         EC NO
FRU    42T0410

MADE IN CHINA
           xxxxxxxxxxxx1ZDTExxxxxx xxx

           80 mm
```

TFT-LCD Product name : LTN141W1–L05
Lot number : 6Y7XXXXXXX
Revision Code : 20A
Inspected work week : 0738(2007 Year, 38th week)
P/N : Lenovo Part Number (42T0443)
EC NO : Engineering Change Number (Blank)
FRU : Field Replaceable Unit Part Number(42T0410)
Header Code : 1ZDTE

Samsung Secret

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	24 / 29

9. GENERAL PRECAUTIONS

1. Handling

(a) When the module is assembled, It should be attached to the system firmly
    using selected mounting holes. Be careful not to twist and bend the modules.

(b) Refrain from strong mechanical shock and / or any force to the module. In addition to
    damage, this may cause improper operation or damage to the module and CCFT backlight.

(c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch
    the surface harder than a HB pencil lead.

(d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time,
    Staining and discoloration may occur.

(e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

(f) The desirable cleaners are water, IPA(Isoprophyl Alcohol) or Hexane.
    Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl
    chloride. It might permanent damage to the polarizer due to chemical reaction.

(g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or
    mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly
    with soap.

(h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.

(i) Use fingerstalls with soft gloves in order to keep display clean during the incoming
    inspection and assembly process.

(j) Do not disassemble the module.

(k) Do not pull or fold the lamp wire.

(l) Do not adjust the variable resistor which is located on the back side.

(m) Protection film for polarizer on the module shall be slowly peeled off just before use so
     that the electrostatic charge can be minimized.

(n) Pins of I/F connector shall not be touched directly with bare hands.

| **Doc.No.** | LTN141W1-L05 | **Rev.No** | 04-P00-G-090619 | **Page** | 25 / 29 |

2. STORAGE

(a) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35°C and
relative humidity of less than 70%.

(b) Do not store the TFT-LCD module in direct sunlight.

(c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent
light during the store.

3. OPERATION

(a) Do not connect,disconnect the module in the " Power On" condition.

(b) Power supply should always be turned on/off by following item 6.3
" Power on/off sequence ".

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic
interference shall be done by system manufacturers. Grounding and shielding methods
may be important to minimize the interference.

(d) The cable between the backlight connector and its inverter power supply shall be a
minimized length and be connected directly . The longer cable between the backlight
and the inverter may cause lower luminance of lamp(CCFT) and may require higher
startup voltage(Vs).

4. OTHERS

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection
of electrode.

(c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input
voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.

(d) If the module displays the same pattern continuously for a long period of time,it can be
the situation when the image "sticks" to the screen.

(e) This module has its circuitry PCB's on the rear side and should be handled carefully in
order not to be stressed.

10. EDID

LTN141W1-L05-20A6(1280*800) EDID Sheet for Lenovo

Address (HEX)	FUNCTION	Value HEX	BIN	DEC	ASCII or Data	Notes
00	Header	00	00000000	0		EDID Header
01		FF	11111111	255		
02		FF	11111111	255		
03		FF	11111111	255		
04		FF	11111111	255		
05		FF	11111111	255		
06		FF	11111111	255		
07		00	00000000	0		
08	ID Manufacturer Name	30	00110000	48	L E N	3 character ID
09		AE	10101110	174		"LEN" as an end-customer
0A	ID Product Code	31	00110001	49		#WXGA
0B		40	01000000	64		
0C	32-bit serial no.	00	00000000	0		
0D		00	00000000	0		
0E		00	00000000	0		
0F		00	00000000	0		
10	Week of manufacture	00	00000000	0		
11	Year of manufacture	11	00010001	17	2007	2007
12	EDID Structure Ver.	01	00000001	1	1	EDID Ver. 1.0
13	EDID revision #	03	00000011	3	3	EDID Rev. 3
14	Video input definition	80	10000000	128		
15	Max H image size	1E	00011110	30	30	30 cm(approx)
16	Max V image size	13	00010011	19	19	19 cm(approx)
17	Display Gamma	78	01111000	120	2.2	Gamma 2.2
18	Feature support	EA	11101010	234		
19	Red/green low bits	CD	11001101	205		10000111
1A	Blue/white low bits	75	01110101	117		11111110
1B	Red x/ high bits	91	10010001	145	0.569	Red x 0.569= 1001010010
1C	Red y	55	01010101	85	0.332	Red y 0.332= 0101011100
1D	Green x	4F	01001111	79	0.312	Green x 0.312= 0100111101
1E	Green y	8B	10001011	139	0.544	Green y 0.544= 1000110011
1F	Blue x	26	00100110	38	0.149	Blue x 0.149= 001001111
20	Blue y	21	00100001	33	0.132	Blue y 0.132= 001001111
21	White x	50	01010000	80	0.313	White x 0.313= 0101000001
22	White y	54	01010100	84	0.329	White y 0.329= 0101010001
23	Established timing 1	21	00100001	33		
24	Established timing 2	08	00001000	8		
25	Established timing 3	00	00000000	0		
26	Standard timing #1	01	00000001	1		not used
27		01	00000001	1		
28	Standard timing #2	01	00000001	1		not used
29		01	00000001	1		
2A	Standard timing #3	01	00000001	1		not used
2B		01	00000001	1		
2C	Standard timing #4	01	00000001	1		not used
2D		01	00000001	1		
2E	Standard timing #5	01	00000001	1		not used
2F		01	00000001	1		
30	Standard timing #6	01	00000001	1		not used
31		01	00000001	1		

Samsung Secret

32	Standard timing #7	01	00000001	1		not used
33		01	00000001	1		
34	Standard timing #8	01	00000001	1		not used
35		01	00000001	1		
36		FD	11111101	253	76.77	Main clock= 76.77 MHz (@60Hz)
37		1D	00011101	29		
38		00	00000000	0	1280	Hor active=640*2 pixels
39		20	00100000	32	288	Hor blanking=288 pixels
3A		51	01010001	81		4bit : 4bit
3B		20	00100000	32	800	Vertcal active=800 lines
3C		10	00010000	16	16	Vertical blanking=16 lines
3D		30	00110000	48		4bit : 4bit
3E		34	00110100	52	52	Hor sync. Offset=52 pixels
3F	Detailed timing/monitor	40	01000000	64	64	H sync. Width=64 pixels
40	descriptor #1	33	00110011	51	3 3	V sync. Offset=3 lines V sync. Width=3 lines
41		00	00000000	0		2bit : 2bit :2bit :2bit
42		2F	00101111	47	303	H image size= 303 mm(approx)
43		BE	10111110	190	190	V image size = 190 mm(approx)
44		10	00010000	16		
45		00	00000000	0		No Horizontal Border
46		00	00000000	0		No Vertical Border
47		19	00011001	25		
48		FE	11111110	254	63.98	Main clock= 63.98 MHz (@50Hz)
49		18	00011000	24		
4A		00	00000000	0	1280	Hor active=640*2 pixels
4B		20	00100000	32	288	Hor blanking=288 pixels
4C		51	01010001	81		4bit : 4bit
4D		20	00100000	32	800	Vertcal active=800 lines
4E		10	00010000	16	16	Vertical blanking=16 lines
4F	Detailed timing/monitor	30	00110000	48		4bit : 4bit
50	descriptor #2	34	00110100	52	52	Hor sync. Offset=52 pixels
51		40	01000000	64	64	H sync. Width=64 pixels
52		33	00110011	51	3 3	V sync. Offset=3 lines V sync. Width=3 lines
53		00	00000000	0		2bit : 2bit :2bit :2bit
54		2F	00101111	47	303	H image size= 303 mm(approx)
55		BE	10111110	190	190	V image size = 190 mm(approx)
56		10	00010000	16		
57		00	00000000	0		No Horizontal Border
58		00	00000000	0		No Vertical Border
59		19	00011001	25		

Doc.No.	LTN141W1-L05	**Rev.No**	04-P00-G-090619	**Page**	28 / 29

Addr	Description	Hex	Binary	Dec	ASCII	Meaning
5A	descriptor #3	00	00000000	0		
5B		00	00000000	0		
5C		00	00000000	0		Manufacturer Specified (Timing)
5D		0F	00001111	15		
5E		00	00000000	0		
5F		81	10000001	129		**(Horizontal active pixel /8)-31**
60		0A	00001010	10		**Image Aspect Ratio(16:10)**
61		32	00110010	50		**Low Refresh Rate #1(50Hz)**
62		81	10000001	129		**(Horizontal active pixel /8)-31**
63		0A	00001010	10		**Image Aspect Ratio(16:10)**
64		28	00101000	40		**Low Refresh Rate #1(40Hz)**
65		12	00010010	18		**Brightness(1/10nit)**
66		01	00000001	1		**Feature flag(TN mode)**
67		00	00000000	0		
68		4C	01001100	76		**supplier ID "SEC"**
69		A3	10100011	163		
6A		57	01010111	87	[W]	Product code "W1"
6B		31	00110001	49	[1]	(Hex, LSB first)
6C		00	00000000	0		
6D		00	00000000	0		
6E		00	00000000	0		Monitor Name Tag (ASCII)
6F		FE	11111110	254		
70		00	00000000	0		
71		4C	01001100	76	[L]	
72		54	01010100	84	[T]	
73	Detailed timing/monitor	4E	01001110	78	[N]	
74	descriptor #4	31	00110001	49	[1]	
75		34	00110100	52	[4]	
76		31	00110001	49	[1]	
77		57	01010111	87	[W]	
78		31	00110001	49	[1]	
79		2D	00101101	45	[-]	
7A		4C	01001100	76	[L]	
7B		30	00110000	48	[0]	
7C		35	00110101	53	[5]	
7D		0A	00001010	10	[^]	
7E	Extension Flag	00	00000000	0		
7F	Checksum	**22**	00100010	34		

Doc.No.	LTN141W1-L05	Rev.No	04-P00-G-090619	Page	29 / 29