

PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST



SPEC. NUMBER	PRODUCT GROUP	Rev.	ISSUE DATE	PAGE
	LCM	P.0	2017.05.22	1 OF 36

NV133FHM-N46 V8.0
Product Specification
Rev. P.0

CHONGQING BOE OPTOELECTRONICS TECHNOLOGY CO.,LTD

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Preliminary Product Specification			PAGE 2 OF 36
REVISION HISTORY				
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0	-	Initial Release	06/08	曾凡建

2

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 3 OF 36

Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Horizontal Timing Waveforms	20
8.0	Input Signals, Basic Display Colors & Gray Scale Of Colors	21
9.0	Power Sequence	22
10.0	Reliability Test	24
11.0	Handling & Cautions.	24
12.0	Label	25
13.0	Packing information	27
14.0	Mechanical Outline Dimension	28
15.0	EDID Table	30


PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 4 OF 36

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV133FHM-N46 V8.0 is a color active matrix TFT LCD module using amorphous silicon TFT's

(Thin Film Transistors) as an active switching devices. This module has a 13.30 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in. All input signals are eDP1.2 interface compatible.

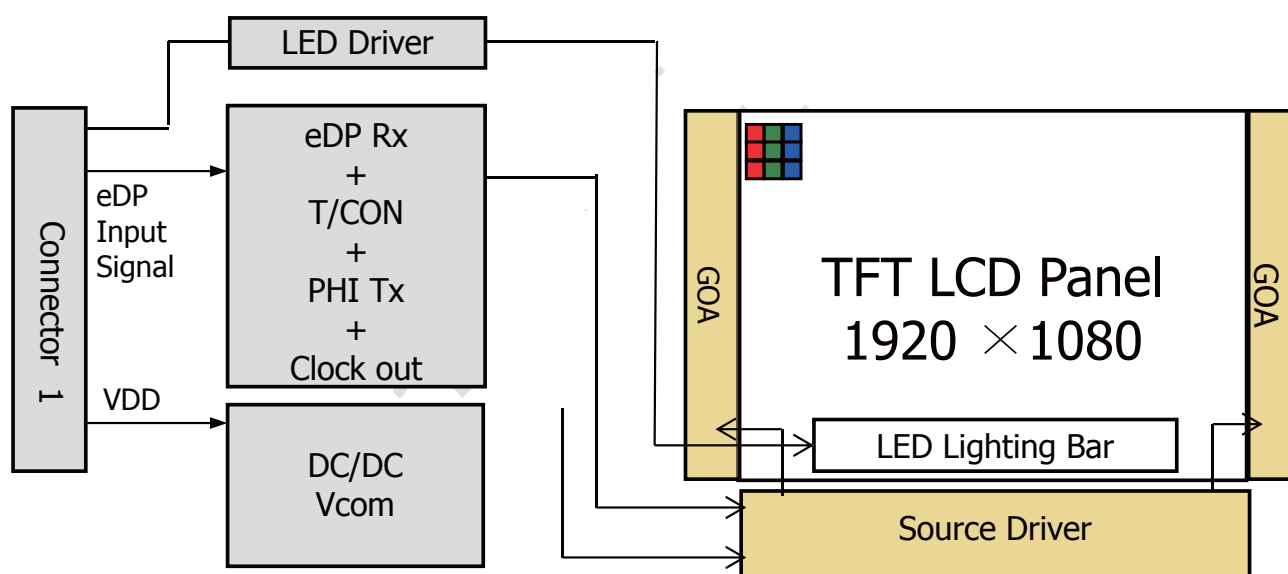

1.2 Features

- 2 lane eDP Interface with 2.7Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 5 OF 36

1.3 Application

- Notebook PC Without Touch function

1.4 General Specification

1.4.1.General LCM Specification(Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	293.76 (H) x 165.24 (V)	mm	13.3''
Number of pixels	1920 (H) x 1080 (V)	pixels	FHD
Pixel pitch	0.153 (H) x 0.153 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally Black		
Dimensional outline	306.3(H)*195.2(V) (W/PCB)*3.0(Max)	mm	
Weight	250(max)	g	
Surface Treatment	Anti-glare		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P _D : 0.9(max)	W	@mosaic pattern
	P _{B/L} :2.18(max.)	W	
	3.08(max.)	W	

Notes : 1. LED Lighting Bar (32*LED Array)

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 6 OF 36

2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.5	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3		V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20		°C	

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.
95 % RH Max. (40 °C ≥ Ta)
Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

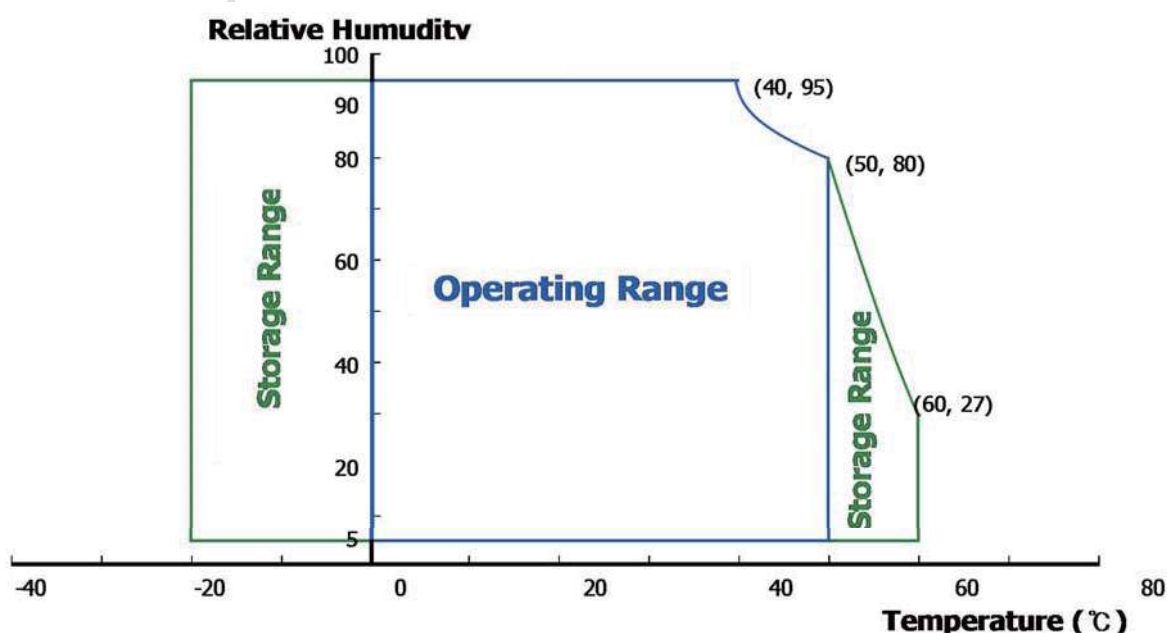

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 7 OF 36

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.		Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	273	-	mA	Note 1
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	120	-	1200	mV	
Power Consumption	P _D	-	0.9	1.3	W	Note 1
	P _{BL}	-	2.18	2.18	W	Note 2
	P _{total}	-	3.08	3.48	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25°C.

a) Typ : Mosaic Pattern

b) Max R/G/B Pattern

2. $I_F \times V_F \times 32 / \text{efficiency} = P_{LED}$

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 8 OF 36

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

Ta=25+/-2 C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V _F	-	-	2.9	V	-
LED Forward Current	I _F	-	20	-	mA	-
LED Power Consumption	P _{LED}		-	2.18	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	I _F = 20mA
Power supply voltage for LED Driver	V _{LED}	6	12	21	V	
EN Control Level	Backlight on	2.0		5.0	V	
	Backlight off	0		0.6	V	
PWM Control Level	PWM High Level	2.0		5.0	V	
	PWM Low Level	0		0.6	V	
PWM Control Frequency	F _{PWM}	200	-	10,000	Hz	
Duty Ratio	-	1	-	100	%	

Notes : 1. Power supply voltage 12V for LED Driver


Calculator Value for reference $I_F \times V_F \times 32 / \text{efficiency} = P_{LED}$

2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 2KHz.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 9 OF 36

3.3 LED structure

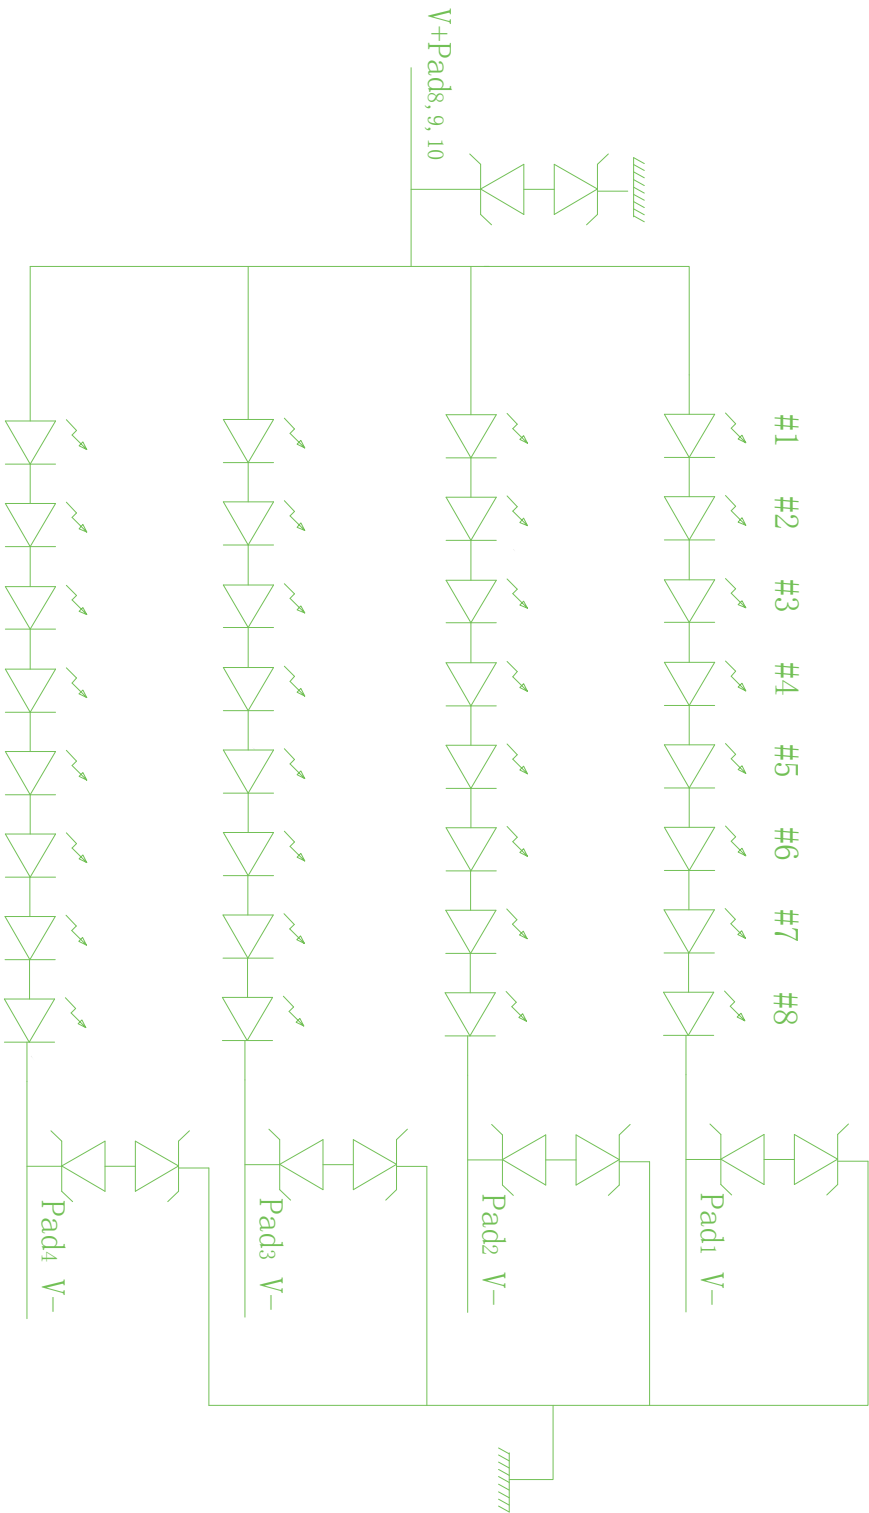

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 10 OF 36

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and ϕ equal to 0. We refer to $\theta=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or ϕ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	CR > 10	-	85	-	Deg.	Note 1
		Θ_9		-	85	-	Deg.	
	Vertical	Θ_{12}		-	85	-	Deg.	
		Θ_6		-	85	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	-	800	-	-	
Luminance of White	5 Points	Y_w	$\Theta = 0^\circ$ $I_{LED} = 20mA$	212.5	250	287.5	-	
White Luminance uniformity	5 Points	ΔY_5		80%	-	-	-	
	13 Points	ΔY_{13}		60%	-	-	-	
White Chromaticity		x_w	$\Theta = 0^\circ$	0.283	0.313	0.343	-	
		y_w		0.299	0.329	0.359	-	
Reproduction of color	Red	x_R	$\Theta = 0^\circ$	-0.03	0.580	+0.03	-	
		y_R			0.368		-	
	Green	x_G			0.357		-	
		y_G			0.565		-	
	Blue	x_B			0.155		-	
		y_B			0.130		-	
Gamut		-	-	-	45	-	%	
Response Time (Rising + Falling)		T_{RT}	$T_a = 25^\circ C$ $\Theta = 0^\circ$	-	30	35	Ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 11 OF 36

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathem

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$.
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.


6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_d .

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark.
(See FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 12 OF 36


4.3 Optical measurements

Figure 1. Measurement Set Up

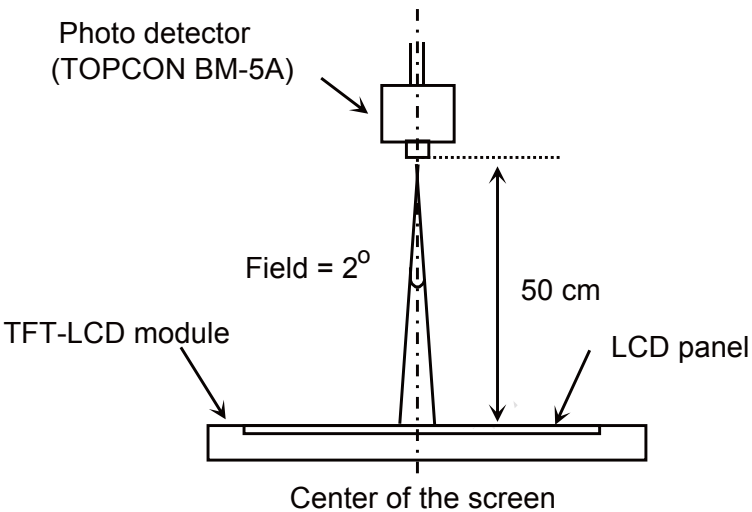

Optical characteristics measurement setup


Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

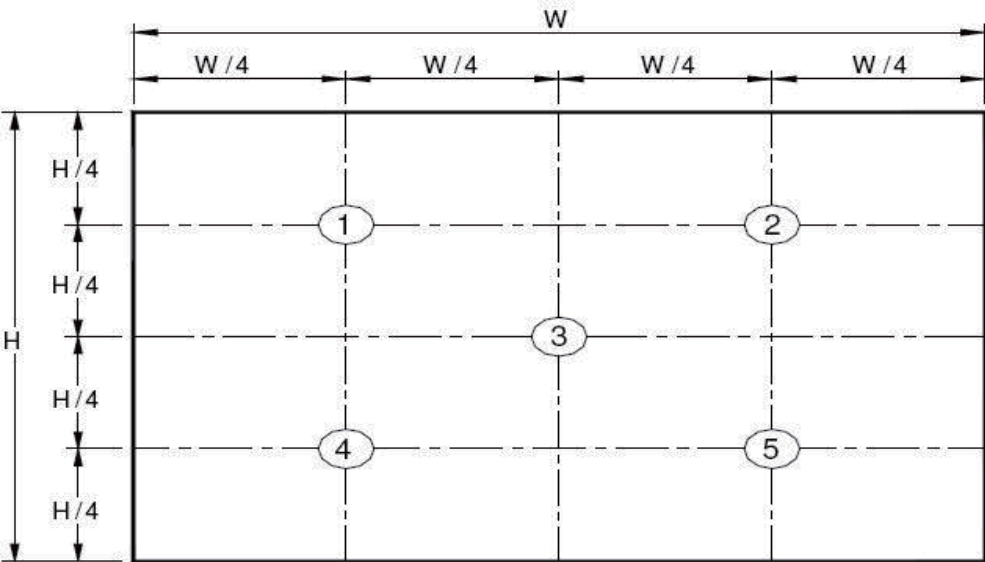

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 13 OF 36

Figure 3. Uniformity Measurement Locations (13 points)

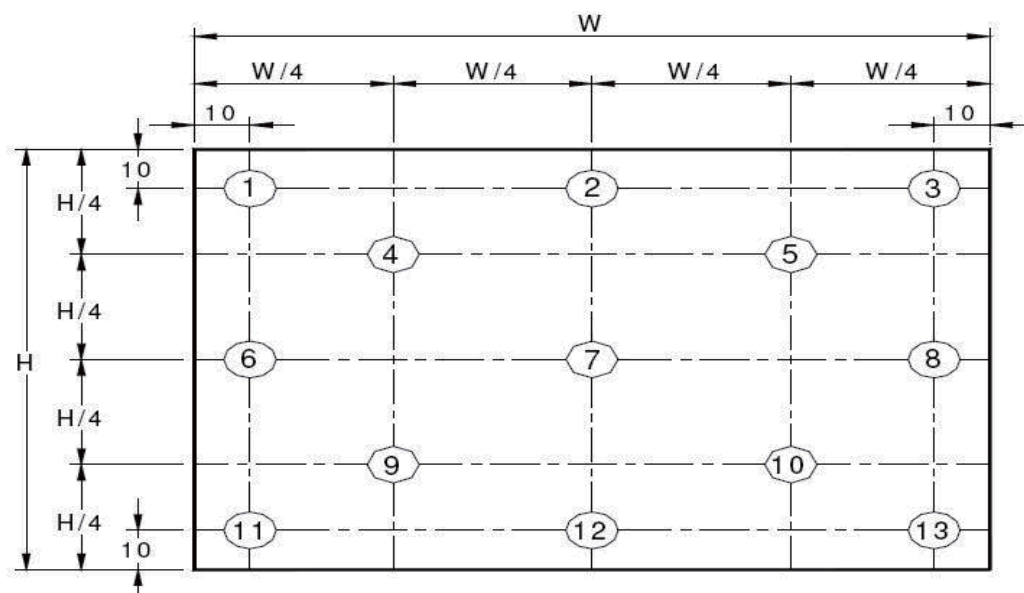

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$ (see FIGURE 2) , $\Delta Y13 = \text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}$ (see FIGURE 3).


Figure 4. Response Time Testing

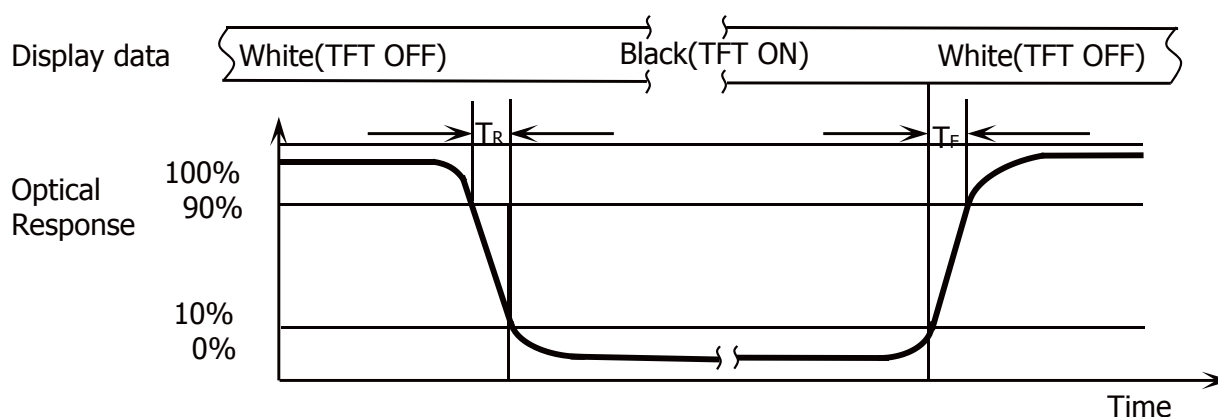

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_d and 90% to 10% is T_r .

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 14 OF 36

Figure 5. Cross Modulation Test Description

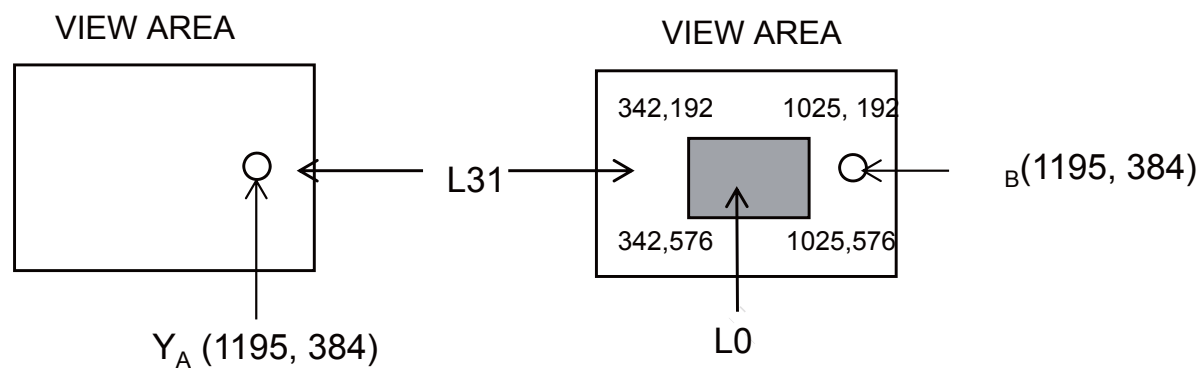

Cross-Talk (%) = $\left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$

Where:
Y_A = Initial luminance of measured area (cd/m²)
Y_B = Subsequent luminance of measured area (cd/m²)
The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 15 OF 36

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection


The electronics interface connector is UJU IS050-L30B-C10 or Compatible.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No connection
2	H-GND	Ground
3	LAN1_N	Complement Signal Link _Lane1
4	LAN1_P	True Signal Link _Lane1
5	H-GND	Ground
6	LAN0_N	Complement Signal Link _Lane0
7	LAN0_P	True Signal Link _Lane0
8	H-GND	High Speed Ground
9	AUXP	True Signal Link _Auxiliry Channel
10	AUXN	Complement Signal Link _Auxiliry Channel
11	H-GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	BIST	Panel self test enable
15	H-GND	Ground
16	H-GND	Ground
17	HPD	HPD(Hot Plug Detect) Signal Pin
18	BL_GND	High Speed Ground
19	BL_GND	High Speed Ground
20	BL_GND	High Speed Ground
21	BL_GND	High Speed Ground
22	BL_EN	Backlight on/off Control pin
23	BL_PWM	Back light PWM Dimming
24	HSYNC	HSYNC
25	NC	No connection
26	BL_PWR	Backlight power
27	BL_PWR	Backlight power
28	BL_PWR	Backlight power
29	BL_PWR	Backlight power
30	NC	No connection

5.2. eDP Interface

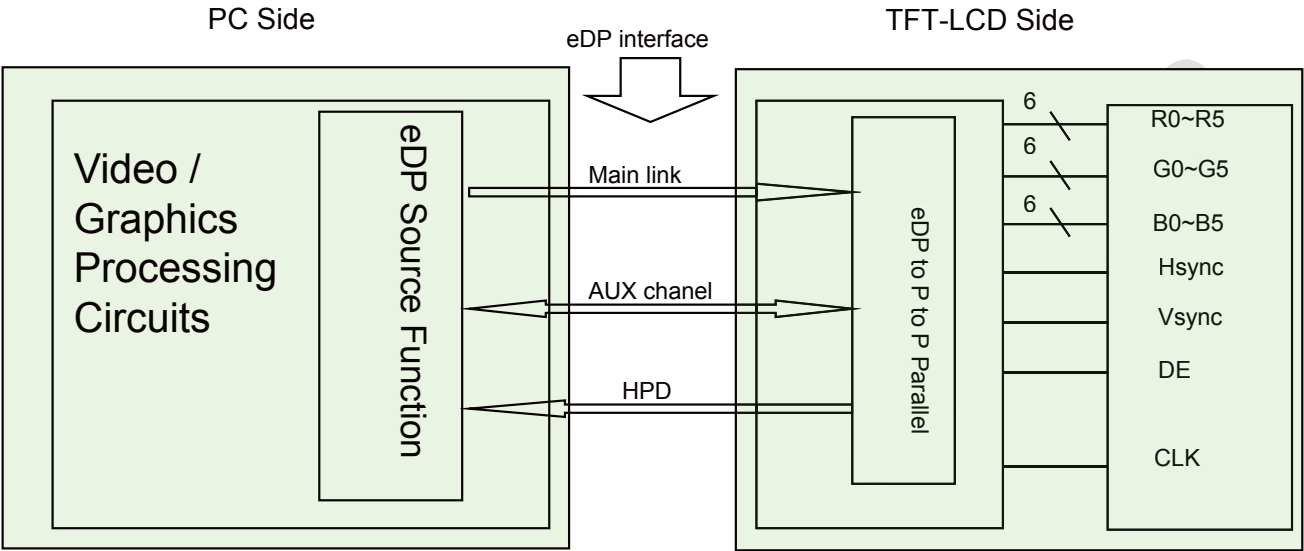

Note. Transmitter : DP501 or equivalent.
Transmitter is not contained in Module.

5.3.eDP Input signal

Lane 0	Lane 1
R0-5:0 G0-5:4	R1-5:0 G1-5:4
G0-3:0 B0-5:2	G1-3:0 B1-5:2
B0-1:0 R2-5:0	B1-1:0 R3-5:0
G2-5:0 B2-5:4	G3-5:0 B3-5:4
B2-3:0 R4-5:2	B3-3:0 R5-5:2
R4-1:0 G4-5:0	R5-1:0 G5-5:0
B4-5:0 R6-5:4	B5-5:0 R7-5:4
R6-3:0 G6-5:2	R7-3:0 G7-5:2
G6-1:0 B6-5:0	G7-1:0 B7-5:0

5.4 Back-light & LCM Interface Connection

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED	LED cathode connection	6	GND	Ground
2	LED	LED cathode connection	7	NC	No Connection
3	LED	LED cathode connection	8	Vout	LED anode connection
4	LED	LED cathode connection	9	Vout	LED anode connection
5	NC	No Connection	10	Vout	LED anode connection

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 18 OF 36

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV133FHM-N46 V8.0 is operated by the DE only.

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	113	147.8	147.8	MHz
Frame Period		Tv	1100	1120	1120	lines
			48	60	60	Hz
			20.8	16.67	16.67	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2140	2200	2200	clocks
Horizontal Display Period		Thd	-	1920	-	clocks


PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 19 OF 36

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 8. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	SSC		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	120	0	1200	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	100	120	Ω	
Single-ended termination resistance	RRX-SE	45	50	55	Ω	
Rx short circuit current limit	IRX_SHORT	0	-	50	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	100	ps	

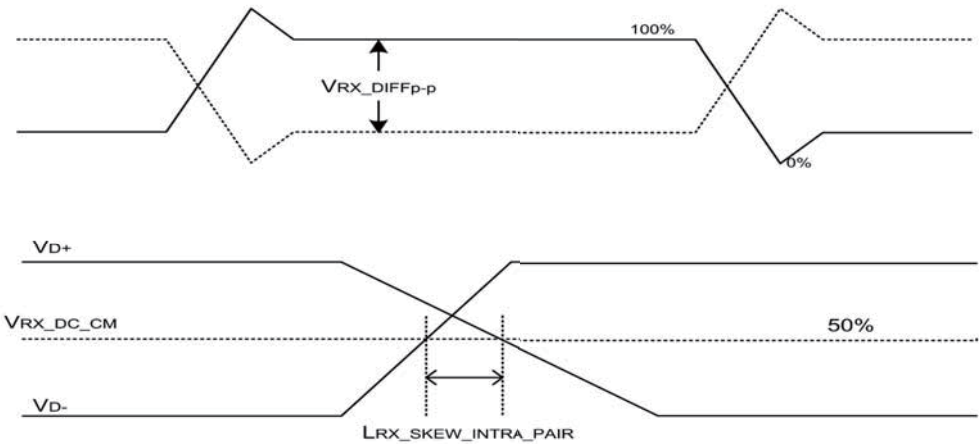

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 20 OF 36


7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑					↑					↑							
	▽	↓					↓					↓							
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△	↑					↑					↑							
	▽	↓					↓					↓							
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△	↑					↓					↑							
	▽	↓					↓					↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△	↑					↑					↑							
	▽	↓					↓					↓							
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 21 OF 36

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

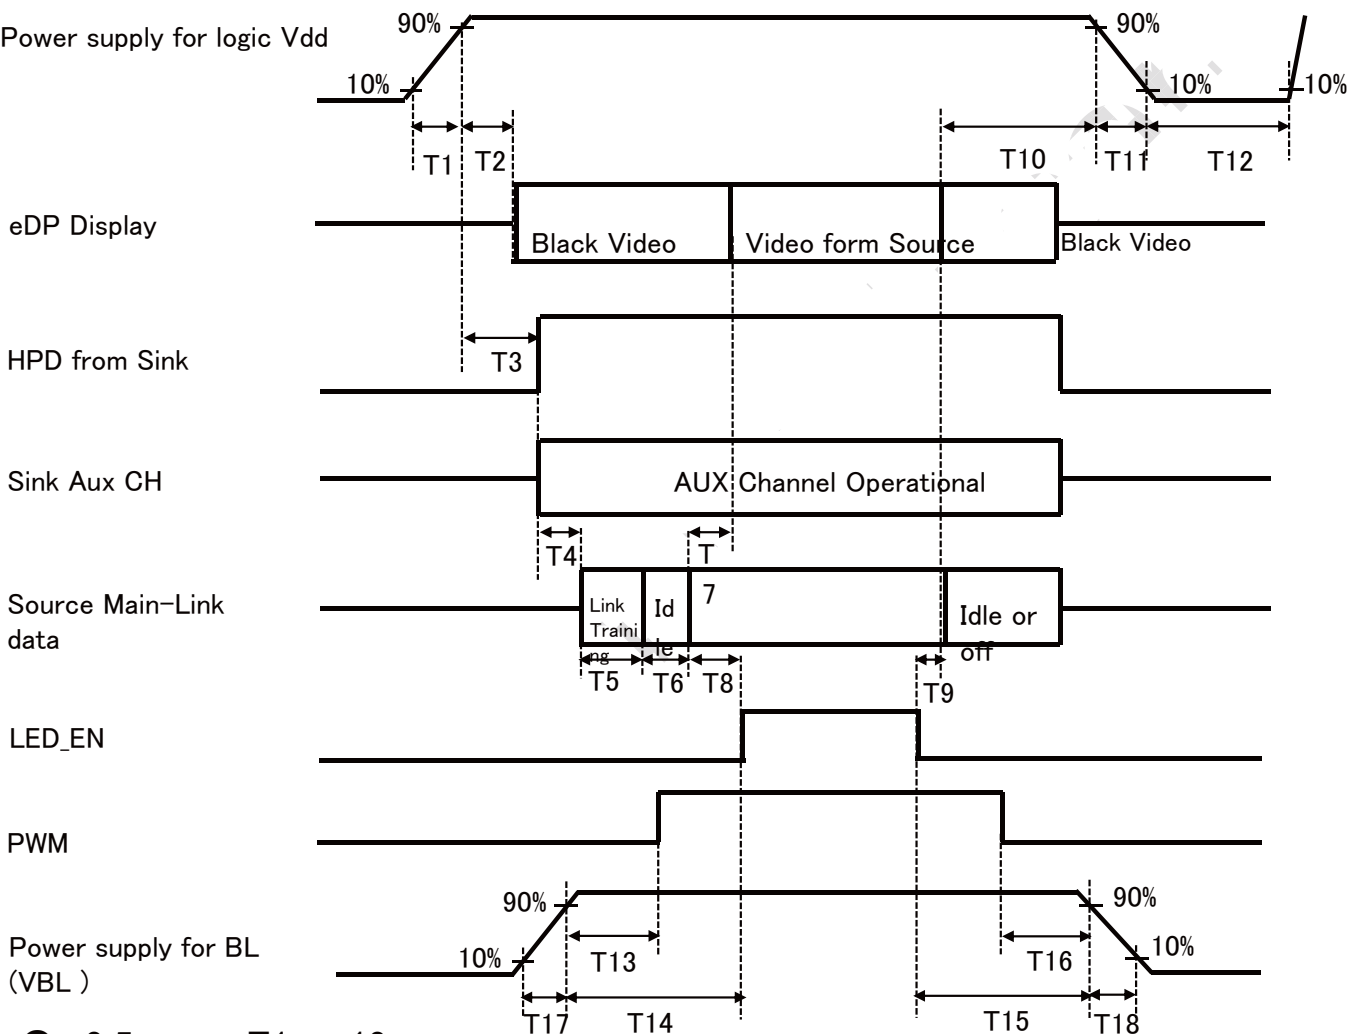

- 0.5ms ≤ T1 ≤ 10 ms
 - 0ms ≤ T2 ≤ 200 ms
 - 0ms ≤ T3 ≤ 200 ms
 - 0ms ≤ T13
 - 0ms ≤ T14
 - 0ms ≤ T17
 - 200ms < T3+T4+T5+T6+T8
- 0ms ≤ T7 ≤ 50ms
 - 0ms ≤ T10 ≤ 500 ms
 - 3ms ≤ T11 ≤ 10 ms
 - 500ms ≤ T12
 - 0ms ≤ T15
 - 0ms ≤ T16
 - 0ms ≤ T18
 - 0ms < T9

Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 22 OF 36

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	UJU or Compatible
Type/ Part Number	IS050-L30B-C10 or Compatible
Mating housing/ Part Number	I-PEX 20454-030T or Compatible

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 23 OF 36

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NV133FHM-N46 V8.0.
Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	293.76 (H) x 165.24 (V)	
Number of pixels	1920 (H) x 1080 (V)	
Pixel pitch	0.153 (H) x 0.153 (V)	mm
Pixel arrangement	RGB Vertical stripe	
Display colors	262K	
Display mode	Normally Black	
Dimensional outline	306.3(H)*195.2(V) (W/PCB)*3.0(Max)	mm
Weight	250(max)	gram
Back Light	Connector :IS050-L30B-C10	
	LED, Horizontal-LED Array type	

10.2 Mounting

See FIGURE 6.

10.3 Glare and Polarizer Hardness.

The surface of the LCD has a Glare coating to minimize reflection and a coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 250lux.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 24 OF 36
<p>(4) Cautions for the atmosphere</p> <ul style="list-style-type: none">• Dew drop atmosphere should be avoided.• Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended. <p>(5) Cautions for the module characteristics</p> <ul style="list-style-type: none">• Do not apply fixed pattern data signal to the LCD module at product aging.• Applying fixed pattern for a long time may cause image sticking. <p>(6) Other cautions</p> <ul style="list-style-type: none">• Do not disassemble and/or re-assemble LCD module.• Do not re-adjust variable resistor or switch etc.• When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.				

24

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 25 OF 36

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 40 °C, 90%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -40 °C ↔ 80 (0.5 hr), 100 cycle
7	Drop (non-operating)	60cm/1 corner/3 edges/6 faces
8	Shock test (non-operating)	220G, Half Sine Wave 2msec Y, ±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module

 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module

 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation

 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 26 OF 36

- (4) Cautions for the atmosphere

 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics

 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions

 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) LCM label



LCM ID 编码规则:


序列号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
代码	S	L	S	T	1	2	3	5	9	4	2	0	0	0	1	D	B
描述	GBN		等级	line	年		月	FG-Code后4位				Serial Number					

客户Serial Number码规则：

	YMD	####
Part Number	MFG Date	S/N
13 digit: num-alphabet	3 digit: Num-alphabet	4 digit: Num-alphabet
Follow Timi PN Rule MD10000004337	Skip "I,O,Q"	SN:4bit, use 0~9 and A~Z numeral-alphabet, skip letter "I,O,Q,U" ; SN must NOT be duplicated.
	Year=last digit of year	
	Month=1-9 for Jan-Sept, A=Oct, B=Nov, C=Dec	
	Day=1-9 for 1 st thru 9 th , A=10, B=11, etc. skip "I,O,Q,U"	

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 27 OF 36

(2) High voltage caution label



HIGH VOLTAGE
CAUTION

RISK OF ELECTRIC SHOCK.
DISCONNECT THE ELECTRIC
POWER BEFORE SERVICING

COLD CATHODE FLUORESCENT LAMP IN LCD
 PANEL CONTAINS A SMALL AMOUNT
 OF MERCURY, PLEASE FOLLOW LOCAL OR-
 DINANCES OR REGULATIONS FOR DISPOSAL.

(3) Box label

BOE

CHONGQING BOE OPTOELECTRONICS
TECHNOLOGY Co., LTD

MODEL: XXXXXXXX-XXX ①

Q'TY: XX ②

SERIAL NO: XXXXXXXXXXXXXX ③

DATE: XXXXXXXXXX ④

BOX ID 条形码



XXXXXXXXXX ⑤

XXXX ⑥

XXXX ⑦

蓝色字体为后打印标识, 说明如下:

1. **FG-CODE**
2. **Box 产品数量**
3. **Box ID**, 编码规则如下
4. **Box Packing 日期**
5. **产品物料号(客户端)**
6. **FG-CODE 后四位**


Box ID 编码规则

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13
代码	S	L	S	8	1	4	3	D	0	0	1	H	D
描述	GBN代码		等级	B8	年份		月	Rev	Serial Number				

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 28 OF 36

14.0 PACKING INFORMATION

14.1 Packing order

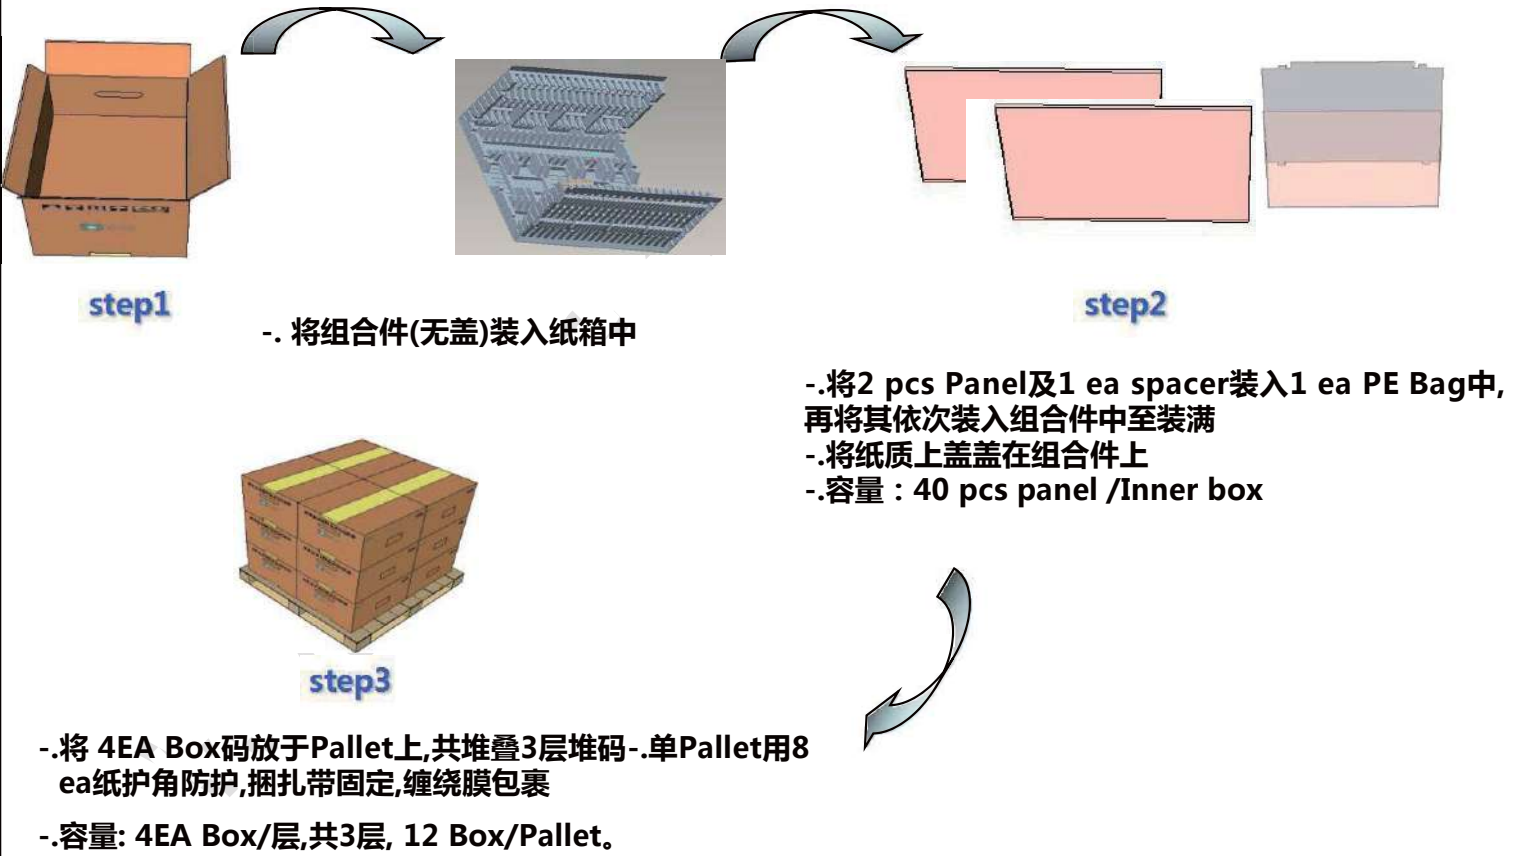


14.2 Notes

- Box Dimension: 12 Box/Pallet
- Package Quantity in one Box: 40pcs

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N46 V8.0 Product Specification			30 OF 36

15.2 Total Solution Outline Dimension

Figure 7. Outline Dimensions (Rear view)

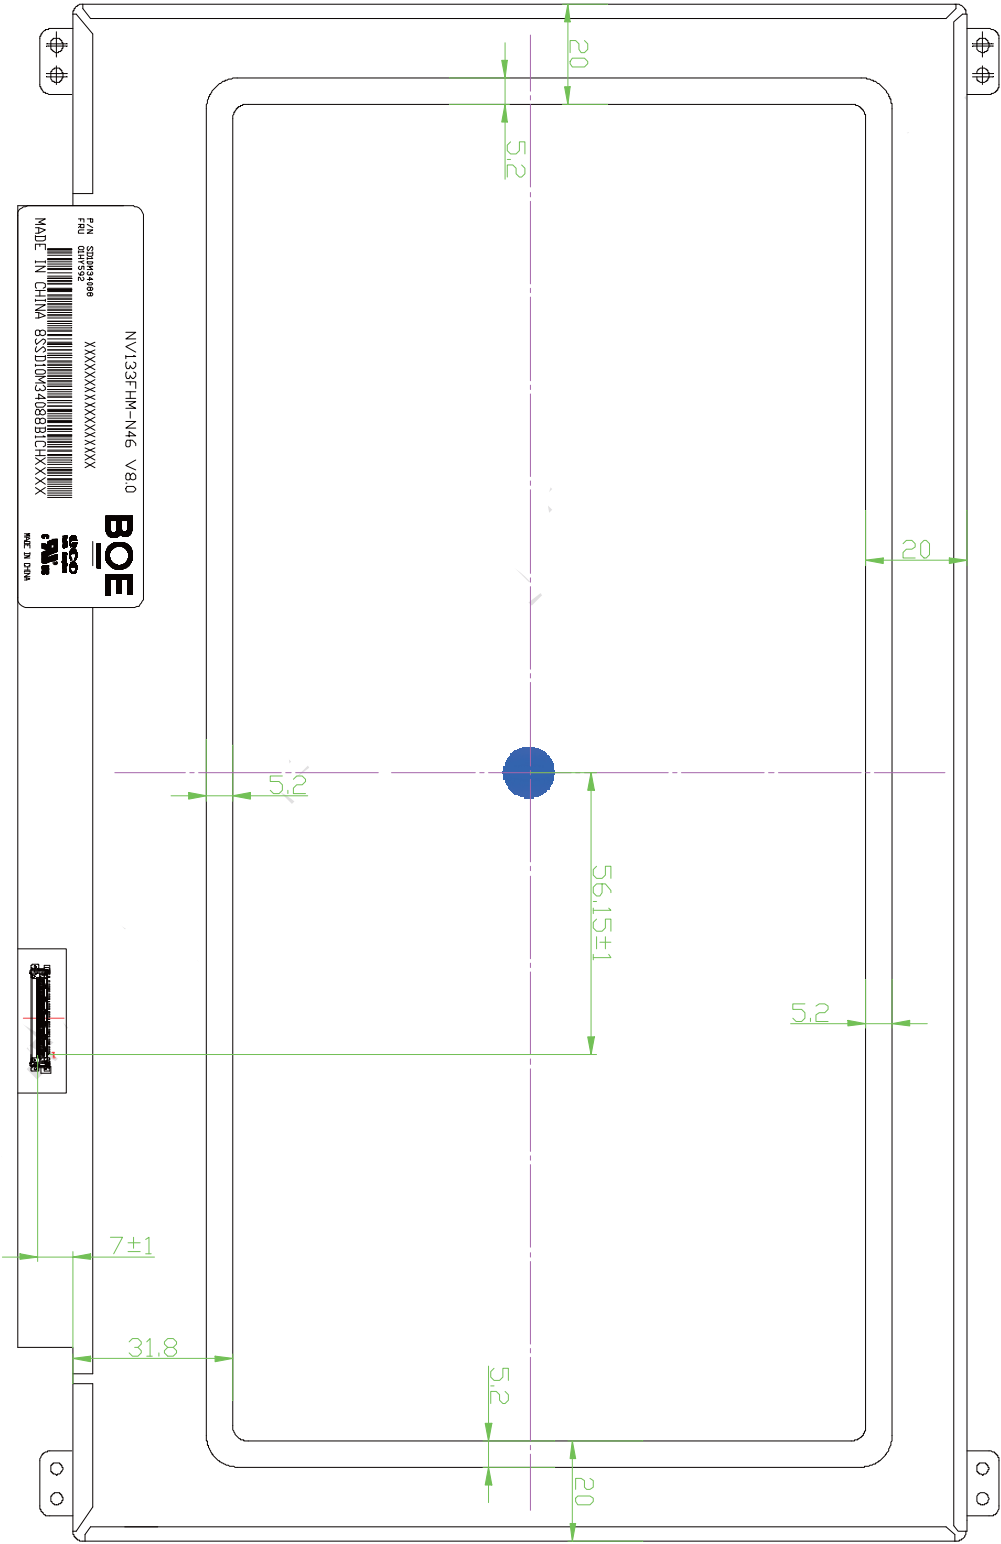

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 31 OF 36

16.0 EDID Table

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
00	Header	00	0		0	EDID Header
01		FF	255		255	
02		FF	255		255	
03		FF	255		255	
04		FF	255		255	
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer Name	09	9		BOE	ID = BOE
09		E5	229			
0A	ID Product Code	FA	250		1786	ID = 1786
0B		06	6			
0C	32-bit serial No.	00	0			
0D		00	0			
0E		00	0			
0F		00	0			
10	Week of manufacture	15	21		21	
11	Year of Manufacture	1B	27		2017	Manufactured in 2017
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	95	149		-	digital signal/DP input
15	Max H image size	1D	29		29	29 cm (Approx)
16	Max V image size	11	17		17	17 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	0A	10			RGB display, Preferred Timming mode
19	Red/Green low bits	46	70		-	Red / Green Low Bits
1A	Blue/White low bits	90	144		-	Blue / White Low Bits
1B	Red x high bits	94	148	593	0.580	Red (x) = 10010100 (0.58)
1C	Red y high bits	5E	94	376	0.368	Red (y) = 01011110 (0.368)
1D	Green x high bits	5B	91	365	0.357	Green (x) = 01011011 (0.357)
1E	Green y high bits	90	144	578	0.565	Green (y) = 10010000 (0.565)
1F	Blue x high bits	27	39	158	0.155	Blue (x) = 00100111 (0.155)
20	Blue y high bits	21	33	133	0.130	Blue (y) = 00100001 (0.13)
21	White x high bits	50	80	320	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	336	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0		-	
24	Established timing 2	00	0		-	

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 32 OF 36

25	Established timing 3	00	0		-	
26	Standard timing #1	01	1			Not Used
27		01	1			
28	Standard timing #2	01	1			Not Used
29		01	1			
2A	Standard timing #3	01	1			Not Used
2B		01	1			
2C	Standard timing #4	01	1			Not Used
2D		01	1			
2E	Standard timing #5	01	1			Not Used
2F		01	1			
30	Standard timing #6	01	1			Not Used
31		01	1			
32	Standard timing #7	01	1			Not Used
33		01	1			
34	Standard timing #8	01	1			Not Used
35		01	1			
36	Detailed timing/monitor descriptor #1	BC	188		147.8	147.8MHz Main clock
37		39	57			
38		80	128		1920	Hor Active = 1920
39		18	24		280	Hor Blanking = 280
3A		71	113		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56		1080	Ver Active = 1080
3C		28	40		40	Ver Blanking = 40
3D		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48		48	Hor Sync Offset = 48
3F		20	32		32	H Sync Pulse Width = 32
40		36	54		3	V sync Offset = 3 line
41		00	0		6	V Sync Pulse width : 6 line
42		26	38		294	Horizontal Image Size = 294 mm (Low 8 bits)
43		A5	165		165	Vertical Image Size = 165 mm (Low 8 bits)
44		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0		0	Hor Border (pixels)
46		00	0		0	Vertical Border (Lines)
47		1A	26			Refer to right table

PRODUCT GROUP			REV	ISSUE DATE	BOE
LCM PRODUCT			P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification				PAGE 33 OF 36

48	Detailed timing/monitor descriptor #2	00	0		0.0	0MHz Main clock
49		00	0			
4A		00	0		0	Hor Active = 0
4B		00	0		0	Hor Blanking = 0
4C		00	0		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		00	0		0	Ver Active = 1080
4E		00	0		0	Ver Blanking = 0
4F		00	0		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		00	0		0	Hor Sync Offset = 0
51		00	0		0	H Sync Pulse Width = 0
52		00	0		0	V sync Offset = 0 line
53		00	0		0	V Sync Pulse width : 0 line
54		00	0		0	Horizontal Image Size = 0 mm (Low 8 bits)
55		00	0		0	Vertical Image Size = 0 mm (Low 8 bits)
56		00	0		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0		0	Hor Border (pixels)
58		00	0		0	Vertical Border (Lines)
59		1A	26			
5A	Detailed timing/monitor descriptor #3	00	0			ASCII Data Sting Tag
5B		00	0			
5C		00	0			
5D		FE	254			
5E		00	0			
5F		42	66		B	Manufacture name : BOE CQ
60		4F	79		O	
61		45	69		E	
62		20	32			
63		43	67		C	
64		51	81		Q	
65		0A	10			
66		20	32			
67		20	32			
68		20	32			
69		20	32			
6A		20	32			
6B		20	32			

PRODUCT GROUP		REV	ISSUE DATE	BOE
LCM PRODUCT		P.0	2017.05.22	
SPEC. NUMBER	SPEC. TITLE NV133FHM-N46 V8.0 Product Specification			PAGE 34 OF 36

6C	Detailed timing/monitor descriptor #4	00	0			Product Name Tag (ASCII)
6D		00	0			
6E		00	0			
6F		FE	254			
70		00	0			
71		4E	78		N	Model name : NV133FHM-N46 V8.0
72		56	86		V	
73		31	49		1	
74		33	51		3	
75		33	51		3	
76		46	70		F	
77		48	72		H	
78		4D	77		M	
79		2D	45		-	
7A		4E	78		N	
7B		34	52		4	
7C		36	54		6	
7D		0A	10			
7E	Extension flag	00	0			
7F	Checksum	67	103	103	-	