

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOECQ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOECQ AND MUST BE RETURNED TO BOECQ UPON ITS REQUEST

SPEC. NUMBER
S871-C013

PRODUCT GROUP
TFT-LCD

Rev. O

ISSUE DATE
2015.11.25

PAGE
1 OF 25

TITLE :**HV320WHB-N8A Product Specification For SEC**

CUSTOMER : SEC VD

APPROVED BY	
DATE	

CONFIRMED BY TV BU	CONFIRMED BY QA	CONFIRMED BY R&D

CHONGQING BOE OPTOELECTRONICE TECHNOLOGY CO.,LTD

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 3 OF 25	

Contents


No	ITEM	Page
	REVISIONS HISTORY	2
	CONTENTS	3
1	GENERAL DESCRIPTION	4
	1.1 Introduction	
	1.2 Features	
	1.3 Applications	
	1.4 General Specification	
2	ABSOLUTE MAXIMUM RATINGS	6
3	ELECTRICAL SPECIFICATIONS	7
	3.1 TFT LCD Open Cell	
4	INTERFACE CONNECTION	8
	4.1 Open Cell Input Signal & Power (1)	
	4.2 Open Cell Input Signal & Power (2)	
5	SIGNAL TIMING SPECIFICATIONS	10
	5.1 Timing Parameters	
	5.2 Signal Timing	
	5.3 Misc. Setting	
	5.4 Input Signals, Basic Display Colors & Cray Scale Of Colors	
	5.5 Power Sequence	
6	OPTICAL SPECIFICATIONS	15
7	MECHANICAL CHARACTERISTICS	17
8	RELIABILITY TEST CONDITION	18
9	PRODUCT SERIAL NUMBER	19
10	PACKING INFORMATION	20
11	HANDING & CAUTIONS	23
12	APPENDIX	24

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 4 OF 25	

1.0 GENERAL DESCRIPTION

1.1 Introduction

HV320WHB-N8A is a color active matrix TFT LCD open cell using amorphous s TFT's (Thin Film Transistors) as an active switching devices. This open cell has a 31.51 inch diagonally measured active area with WXGA resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this open cell can display 16.7M colors. The TFT-LCD panel used for this open cell is adapted for a low reflection and higher color type.

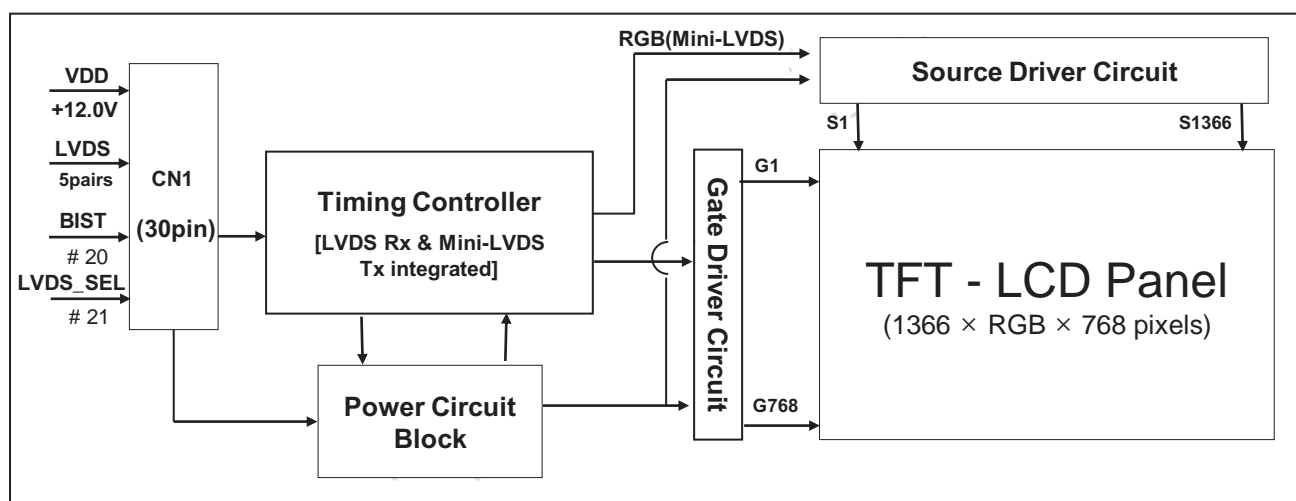

1.2 Features

- LVDS interface with 1 pixel / clock
- High-speed response
- Low color shift image quality
- 8-bit color depth, display 16.7M colors
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) only mode
- ADS technology is applied for high display quality
- RoHS compliant

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 5 OF 25	

1.3 Application

- Home Alone Multimedia TFT-LCD TV
- Display Terminals for Control System
- High Definition TV(HD TV)
- AV application Products

1.4 General Specification

< Table 1. General Specifications >

Parameter	Specification	Unit	Remark
Active area	697.685(H) × 392.256(V)	mm	
Number of pixels	1366(H) × 768(V)	pixels	
Pixel pitch	510.75(H) × RGB × 510.75(V)	μm	
Pixel arrangement	Pixels RGB Vertical stripe		
Display colors	16.7M(8bits-true)	colors	
Display mode	Transmission mode, Normally Black		
Open Cell Transmittance	6.15 (typ.)	%	At center point with BOE BLU
Weight	890 (typ.)	gram	
Power Consumption	4.0 (typ.)	Watt	
Surface Treatment	Haze 1%, 3H, Semi-glare or Anti-glare treatment (Front Polarizer) Clear (Bottom Polarizer)		

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 6 OF 25	

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.


< Table 2. Open Cell Electrical Specifications >

[VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remark
Power Supply Voltage	VDD	VSS-0.3	13.2	V	Ta = 25 °C
Operating Temperature	T _{OP}	0	+50	°C	Note 1
	T _{SUR}	0	+60	°C	
Storage Temperature	T _{ST}	-20	+60	°C	
Operating Ambient Humidity	Hop	10	80	%RH	
Storage Humidity	Hst	10	80	%RH	

Note 1 : Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.

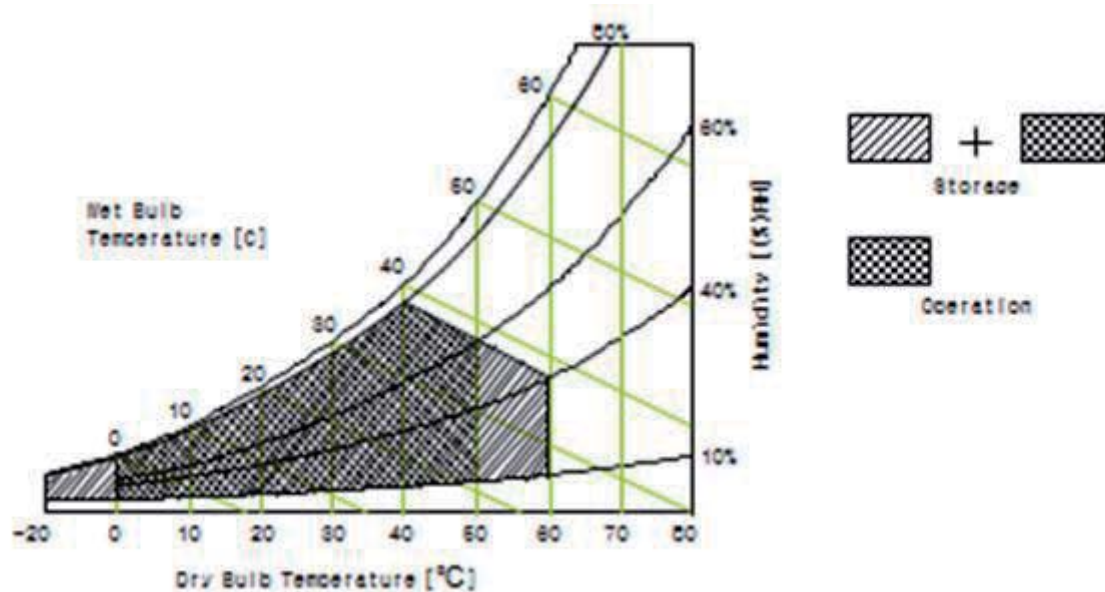

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification		PAGE 7 OF 25

3.0 ELECTRICAL SPECIFICATIONS

3.1 TFT LCD Open Cell

< Table 3. Open Cell Electrical Specifications >

[Ta =25±2 °C]

Parameter		Symbol	Values			Unit	Remark
			Min	Typ	Max		
Power Supply Input Voltage		VDD	10.8	12	13.2	Vdc	
Power Supply Ripple Voltage		VRP			600	mV	
Power Supply Current		IDD	-	350	550	mA	Note 1
Power Consumption		PDD		4.2	6.6	Watt	
Rush current		IRUSH	-	-	3.0	A	Note 2
LVDS Interface	Differential Input High Threshold Voltage	VLVTH	+100		+300	mV	
	Differential Input Low Threshold Voltage	VLVTL	-300		-100	mV	
	Common Input Voltage	VLVC	1.0	1.2	1.4	V	
CMOS Interface	Input High Threshold Voltage	VIH	2.7	-	3.3	V	
	Input Low Threshold Voltage	VIL	0	-	0.6	V	
Black Fog Mura (Von Margin test)				5000		hrs	Note 3



Note 1 : The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=12.0V,

Frame rate $f_v=60\text{Hz}$ and Clock frequency = 75.4MHz.

Test Pattern of power supply current

a) Typ : Mosaic 8 x 6 Pattern(L0/L255) b) Max : Gray Level Pattern L255 c)Flicker Test Pattern

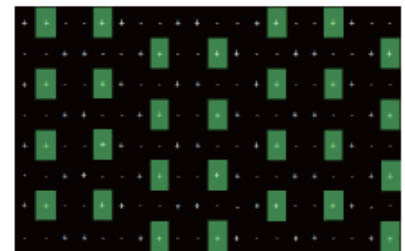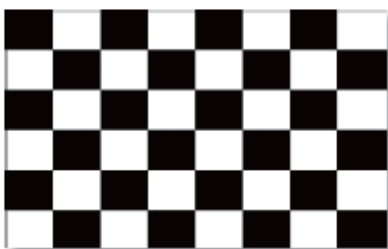

Note 2 : The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

Note 3: Black Fog Mura : This is base on Von Margin test and condition should be over 6V after 5000hrs operating in a temperature of 50°C

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 8 OF 25	

4.0 INTERFACE CONNECTION

4.1 Open Cell Input Signal & Power

4.1.1 LVDS Connector

- Connector : FW10039-30(Manufactured by Foosung) or Equivalent.

< Table 4. Open Cell Input Connector Pin Configuration >

Pin No	Symbol	Description	Pin No	Symbol	Description
1	NC	No Connection	16	GND	Ground
2	SCL	SCL	17	RXIN3-	LVDS Receiver Signal(-)
3	SDA	SDA	18	RXIN3+	LVDS Receiver Signal(+)
4	GND	Ground	19	GND	Power Ground
5	RXIN0-	LVDS Receiver Signal(-)	20	BIST	Aging Mode Enable
6	RXIN0+	LVDS Receiver Signal(+)	21	LVDS_SEL	Default JEIDA
7	GND	Ground	22	WP	Write Protection
8	RXIN1-	LVDS Receiver Signal(-)	23	GND	Power Ground
9	RXIN1+	LVDS Receiver Signal(+)	24	GND	Power Ground
10	GND	Ground	25	GND	Power Ground
11	RXIN2-	LVDS Receiver Signal(-)	26	VCC	Power Supply : +12V
12	RXIN2+	LVDS Receiver Signal(+)	27	VCC	
13	GND	Ground	28	VCC	
14	RXCLKIN-	LVDS Receiver Clock Signal(-)	29	VCC	
15	RXCLKIN+	LVDS Receiver Clock Signal(+)	30	VCC	

- Notes : 1. NC(Not Connected) : These pins are only used for BOE internal operations.
2. Input Level of LVDS signal is based on the EIA 664 Standard.
3. LVDS data format: According to SEC VD request, JEIDA format is adopted.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 9 OF 25	

4.0 INTERFACE CONNECTION

4.1 Open Cell Input Signal & Power

4.1.2 Aging Connector

- Connector : 12507WR-H10G(Manufactured by YEONHO)or Equivalent.

< Table 5. Open Cell Aging Connector Pin Configuration >

Pin No	Symbol	Description	Pin No	Symbol	Description
1	VCC	Power Supply : +12V	6	SDA	SDA
2	VCC		7	SCL	SCL
3	GND	GND	8	GND	GND
4	Aging_EN	Aging Mode Enable	9	NC	NC
5	WP	Write Protection	10	NC	NC

Notes : 1. NC(Not Connected) : This pins are only used for BOE internal operations.

2. Aging _ EN : This pin is used for selecting display pattern mode when input DE or input CLOCK quits toggling.


If this Pin : Low (GND) → Aging mode(BIST Mode)

Otherwise : High(3.3V) or Open (NC) → Free run mode(Black Data)

Sequence : On = VDD ≥ LVDS Option , BIST Option ≥ Interface signal

Off = Interface signal ≥ LVDS Option , BIST Option ≥ VDD

Rear view of LCM

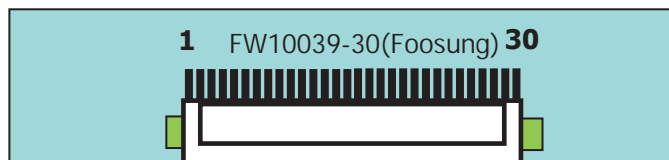

**BIST(Aging)
Pattern**



BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification		PAGE 10 OF 25

4.2 LVDS Interface

- LVDS Receiver : Timing Controller (LVDS Rx merged) / LVDS Data : Pixel Data

< Table 6. Open Cell Input Connector Pin Configuration >

	LVDS Pin	Vesa Data format	JEIDA Data format	Remark
TxOUT/RxIN0	TxIN/RxOUT0	Red0 [LSB]	R2	
	TxIN/RxOUT1	Red1	R3	
	TxIN/RxOUT2	Red2	R4	
	TxIN/RxOUT3	Red3	R5	
	TxIN/RxOUT4	Red4	R6	
	TxIN/RxOUT6	Red5	R7 [MSB]	
	TxIN/RxOUT7	Green0 [LSB]	G2	
TxOUT/RxIN1	TxIN/RxOUT8	Green1	G3	
	TxIN/RxOUT9	Green2	G4	
	TxIN/RxOUT12	Green3	G5	
	TxIN/RxOUT13	Green4	G6	
	TxIN/RxOUT14	Green5	G7 [MSB]	
	TxIN/RxOUT15	Blue0 [LSB]	B2	
	TxIN/RxOUT18	Blue1	B3	
TxOUT/RxIN2	TxIN/RxOUT19	Blue2	B4	
	TxIN/RxOUT20	Blue3	B5	
	TxIN/RxOUT21	Blue4	B6	
	TxIN/RxOUT22	Blue5	B7 [MSB]	
	TxIN/RxOUT24	HSYNC	HSYNC	
	TxIN/RxOUT25	VSYNC	VSYNC	
	TxIN/RxOUT26	DEN	DEN	
TxOUT/RxIN3	TxIN/RxOUT27	Red6	R0 [LSB]	
	TxIN/RxOUT5	Red7 [MSB]	R1	
	TxIN/RxOUT10	Green6	G0 [LSB]	
	TxIN/RxOUT11	Green7 [MSB]	G1	
	TxIN/RxOUT16	Blue6	B0 [LSB]	
	TxIN/RxOUT17	Blue7 [MSB]	B1	
	TxIN/RxOUT23	Reserved	Reserved	

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 11 OF 25	

5.0 SIGNAL TIMING SPECIFICATION

5.1 Timing Parameters (DE only mode)

< Table 7. Timing Table >



ITEM	Symbol		Min	Typ	Max	Unit	Note
CLK	Period	t_{CLK}	11.8	13.3	17.9	ns	
	Frequency	-	56	75.4	85.0	MHz	
Hsync	Period	t_{HP}	1450	1560	2000	t_{CLK}	
	Frequency	f_H	39.4	48.4	55	KHz	
Vsync	Period	t_{VP}	778	806	1200	t_{HP}	
	Frequency	f_V	47	60	65	Hz	
Horizontal Active Display Term	Valid	t_{HV}	-	1366	-	t_{CLK}	
	Total	t_{HP}	1450	1560	2000	t_{CLK}	
Vertical Active Display Term	Valid	t_{VV}	-	768	-	t_{HP}	
	Total	t_{VP}	778	806	1200	t_{HP}	

Notes: This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

Notes: This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 12 OF 25	

5.2 Signal Timing Waveform

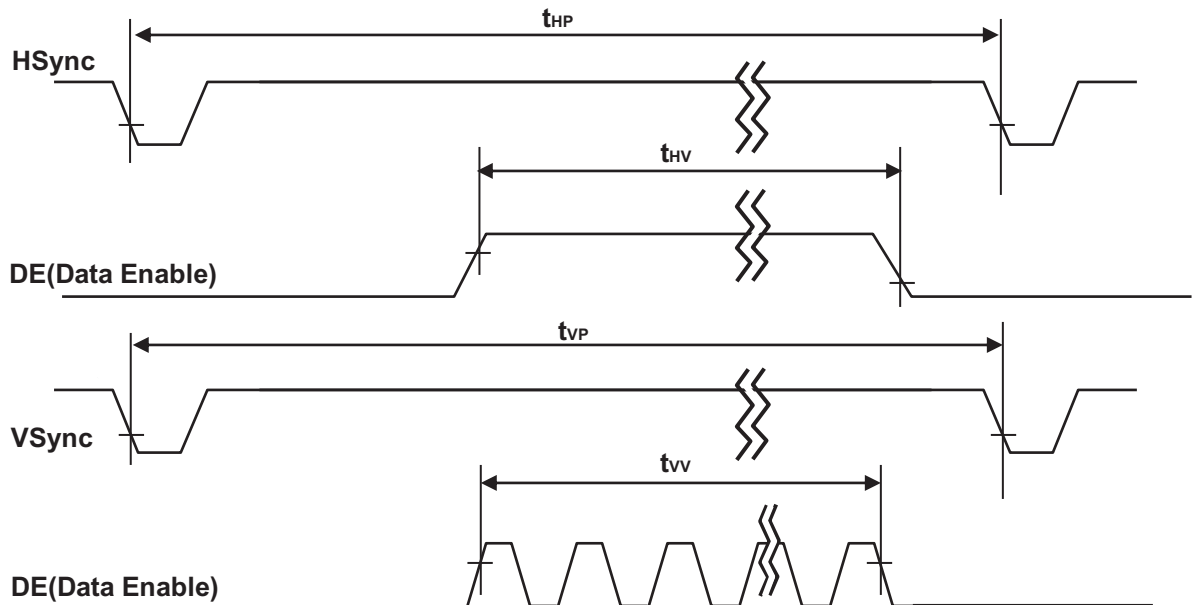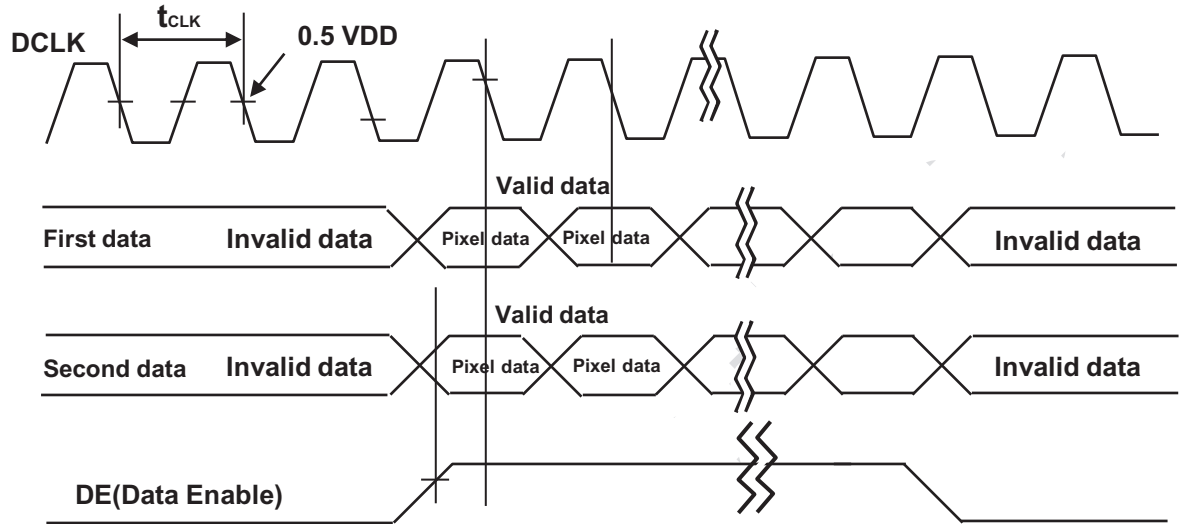

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 13 OF 25	

5.3 Input Signals, Basic Display Colors and Gray Scale of Colors


< Table 8. Input Signal and Display Color Table >

Color & Gray Scale		Input Data Signal																			
		Red Data								Green Data								Blue Data			
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑			
	▽	↓								↓								↓			
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	△	↑								↑								↑			
	▽	↓								↓								↓			
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	△	↑								↑								↑			
	▽	↓								↓								↓			
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	0	0	0	0
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0
	△	↑								↑								↑			
	▽	↓								↓								↓			
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 14 OF 25	

5.4 Power Sequence

To prevent a latch-up or DC operation of the Open Cell, the power on/off sequence shall be as shown in below

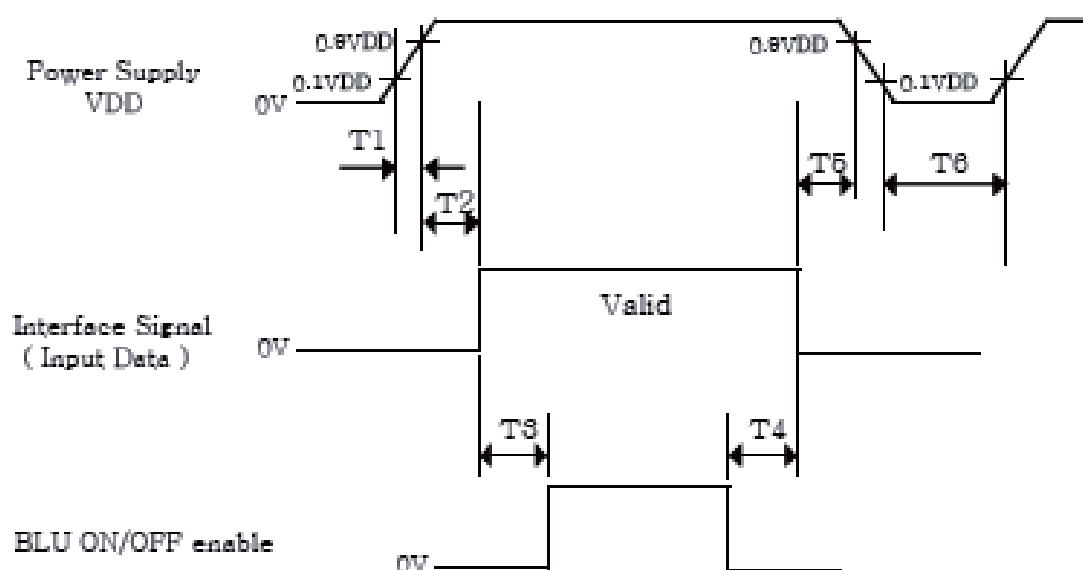

< Table 9. Sequence Table >

Parameter	Values			Units
	Min	Typ	Max	
T1	0.5	-	20	ms
T2	0	-	50	ms
T3	200	-	-	ms
T4	200	-	-	ms
T5	0	-	50	ms
T6	1	-	-	s

Notes: 1. Even though T1 is over the specified value, there is no problem if I2T spec of fuse is satisfied.
2. Back Light must be turn on after power for logic and interface signal are valid.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 15 OF 25	

6.0 OPTICAL SPECIFICATIONS

The test of optical specifications shall be measured in a dark room (ambient luminance \leq 1 lux and temperature $=25\pm 2^{\circ}\text{C}$) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{\Phi=0}$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta_{\Phi=90}$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta_{\Phi=180}$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta_{\Phi=270}$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 12.0V \pm 10% at 25°C . Optimum viewing angle direction is 6 'clock.

< Table 10. Optical Table >

[VDD = 12.0V, Frame rate = 60Hz, Ta $=25\pm 2^{\circ}\text{C}$]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Θ_3	CR > 10		89		Deg.	Note 1
		Θ_9			89		Deg.	
	Vertical	Θ_{12}			89		Deg.	
		Θ_6			89		Deg.	
Contrast ratio		CR	$\Theta = 0^\circ$ (Center) Normal Viewing Angle With BOE Module	900:1	1200:1	-		Note 2
Reproduction of color	White	W_x		TYP. - 0.03	0.288 0.299 0.638 0.334 0.301 0.609 0.152 0.061	TYP. + 0.03		Note 3
		W_y						
	Red	R_x						
		R_y						
	Green	G_x						
		G_y						
	Blue	B_x						
		B_y						
Response Time	G to G	T_g		-	8	10	ms	Note 4
Gamma Scale				-	2.2	-		2.2 ± 0.3 (50~128 Gray)
Cell Transmittance						6.15		%

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 16 OF 25	

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See Figure 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. The color chromaticity coordinates specified in Table 9.shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel. The BLU is used by BOE.
4. Response time T_g is the average time required for display transition by switching the input signal as below table and is based on Frame rate $f_V = 60\text{Hz}$ to optimize.
Each time in below table is defined as Figure 2 and shall be measured by switching the

Measured Response Time		Target																
		0	15	31	47	63	79	95	111	127	143	159	175	191	207	223	239	255
Start	0																	
	15																	
	31																	
	47																	
	63																	
	79																	
	95																	
	111																	
	127																	
	143																	
	159																	
	175																	
	191																	
	207																	
	223																	
	239																	
255																		

5. Definition of Transmittance (T%) :

Module is with white(L255) signal input

$$\text{Transmittance} = \frac{\text{Luminance of LCD Module}}{\text{Luminance of BLU}} \times 100 \%$$

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 17 OF 25	

7.0 MECHANICAL CHARACTERISTICS

7.1 Dimensional Requirements

Figure 3 (located in Appendix) shows mechanical outlines for the model HV320WHB-N10. Other parameters are shown in Table 10.

< Table 11. Dimensional Parameters >

Parameter	Specification	Unit
Active area	697.685 (H) × 392.256(V)	mm
Pixel pitch	0.51(H) × 0.51(V)	mm
Number of pixels	1366(H) × 768(V) (1 pixel = R + G + B dots)	pixels
Weight	890 (typ.)	gram

7.2 Semi-Glare and Polarizer Hardness

The surface of the LCD has an semi-glare coating to minimize reflection and a coating to reduce scratching.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 18 OF 25	

8.0 RELIABILITY TEST

< Table 12. Reliability Test Condition >

Item	Test Condition
High-Temp/STG	Ta = 60 °C, 240 hrs
Low-Temp/STG	Ta = -20 °C, 240 hrs
High-Temp/HMD	Ta = 50 °C, 80%RH, 240hrs
High-Temp/OP	Ta = 50 °C, 240hrs
Low-Temp/OP	Ta = 0 °C, 240hrs
TST	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle

This test condition is based on BOE module.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification		PAGE 19 OF 25

9.0 PRODCUT SERIAL NUMBER



MDL ID Naming Rule:

Code \ Digit	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	5	1	2	3	5	9	0	0	0	0
Description	Model Code /GBN		Grade	Line	Year		Month	Model Extension Code		SerialNo 00001-ZZZZZZ			


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 20 OF 25	

10.0 PACKING INFORMATION


BOE provides the standard shipping container for customers, unless customer specifies their packing information. The standard packing method and Barcode information are shown in below.

10.1 Packing Order

Put EPE pad and panels into the box, 12pcs panels per box. Then Put 4ea desiccants into the hole.

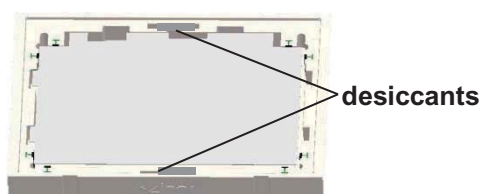

Put the box on the pallet,16ea boxes per pallet.



Use 1ea PE FILM& wrapping film to bind up them.

Put 2ea covers on the top of boxes.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 21 OF 25	

10.2 Packing Note

- Box Dimension : 857mm(L) × 558mm(W) × 117mm(H)
- Package Quantity in one Box : 12pcs

10.3 Box Label

- Label Size : 100 mm (L) × 50 mm (W)
- Contents
 - Model : HV320WHB-N8A
 - Q'ty : 12pcs Open Cell in one box.
 - Serial No. : Box Serial No.
 - Date : Packing Date
 - FG Code : FG Code of Product

BOE		CHONGQING BOE OPTOELECTRONICS TECHNOLOGY Co., LTD	
MODEL: XXXXXXX-XXX	①	Q'TY: XX	②
SERIAL NO: XXXXXXXXXXXXX	③	DATE: XXXXXXXXX	④
BOX ID 条形码			
XXXXXXXXXX	⑤	XXXX	⑥
		XXXX	⑦

Box ID Naming Rule:

Digit	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	5	1	2	3	D	0	0	0	6	8
Description	Products GBN		Grade	Line	Year		Month	Revision Code	Serial No				

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification		PAGE 22 OF 25

10.4 Packing Material ESD Specification

Item	SPEC
Surface Resistance [10 ⁿ Ω]	Control by 10 ⁶ ~10 ⁹ - Box, Spacer, POL Protection film

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification		PAGE 23 OF 25


11.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the Panel
 - Pick the pouch only, when taking out panel from a shipping package.
- (2) Cautions for handling the panel
 - As the electrostatic discharges may break the LCD panel, handle the LCD panel with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD panel should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD panel is operating.
 - Put the panel display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the panel is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the panel would be damaged.
- (4) Cautions for the atmosphere
 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD panel in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the panel characteristics
 - Do not apply fixed pattern data signal to the LCD panel at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
 - Do not disassemble and/or re-assemble LCD panel.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the panel for repair or etc., Please pack the panel not to be broken. We recommend to use the original shipping packages.


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 24 OF 25	

12.0 APPENDIX

< Figure 1. Measurement Set Up >

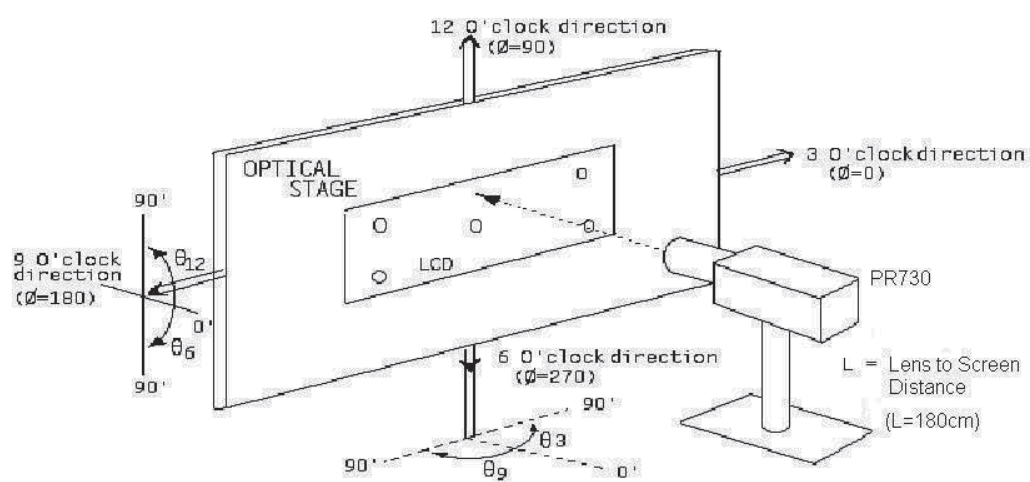

< Figure 2. Response Time Testing >

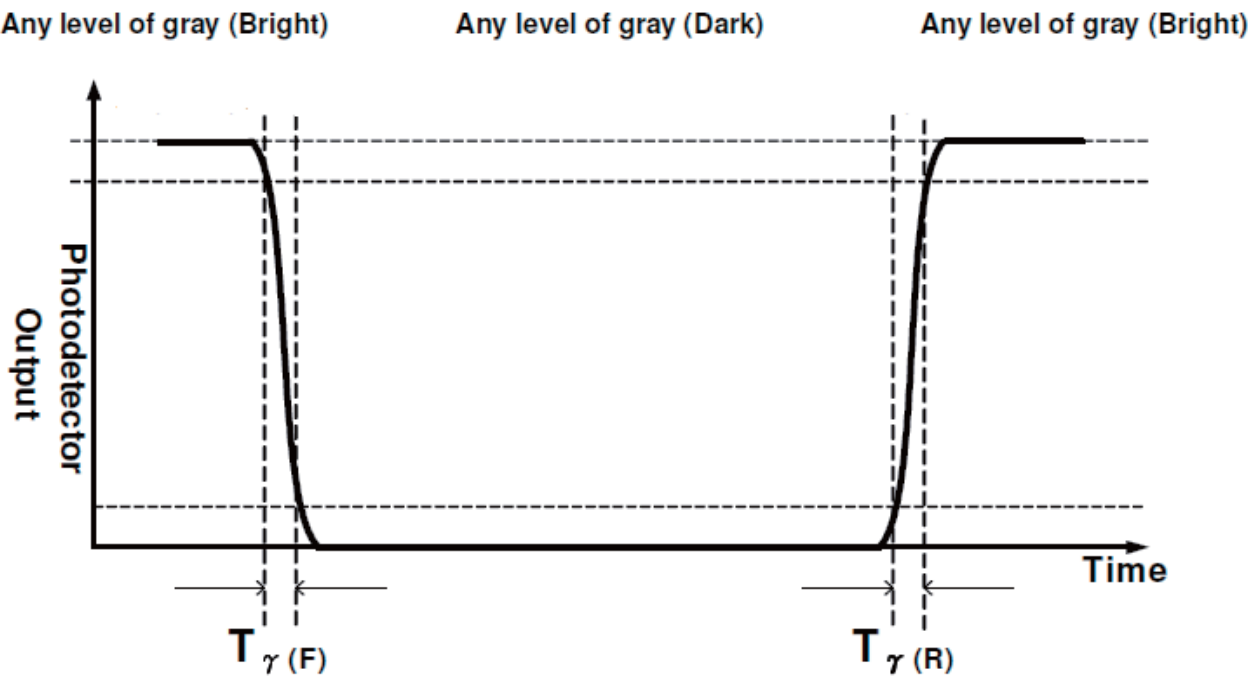

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	O	2015.11.25
SPEC. NUMBER S871-C013	SPEC. TITLE HV320WHB-N8A Product Specification	PAGE 25 OF 25	

< Figure 3. TFT-LCD Open Cell Outline Dimensions (Front View) >

