SPECIFICATION
FOR
APPROVAL

(   )   **Preliminary Specification**

(◆)   **Final Specification**

Title	14.1" WXGA+ TFT LCD

Customer	General
MODEL	

SUPPLIER	LG.Display Co., Ltd.
*MODEL	LP141WP1
Suffix	TLB9

*When you obtain standard approval,
 please use the above model name without suffix

APPROVED BY	SIGNATURE
/	
/	
/	

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
G. J. Kwon / G.Manager	
REVIEWED BY	
G. J. Han / Manager	
PREPARED BY	
C. Y. Kim / Engineer	
J. M. Shin / Engineer	

Products Engineering Dept.
LG Display Co., Ltd

Contents

RECORD OF REVISIONS

| Revision No	Revision Date	Page	Description	EDID ver
0.0	Nov. 29. 2007	-	First Draft (Preliminary Specification)	0.0
0.1	Dec. 10. 2007	29~31	CAS format changed "Detailed Timing Description #1" of EDID Data changed → HEX Value of old version(0.0) was wrong.	0.1
0.2	Apr. 08. 2008	29~31	Revise EDID data → Same format with LP141WP1-TLB8	0.2
1.0	May. 08. 2008	-	Change Lamp Wire Color Final Draft	

LG Display

Product Specification

1. General Description

The LP141WP1 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 15.4 inches diagonally measured active display area with WXGA resolution(900 vertical by 1440 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP141WP1 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP141WP1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141WP1 characteristics provide an excellent flat display for office automation products such as Notebook PC.
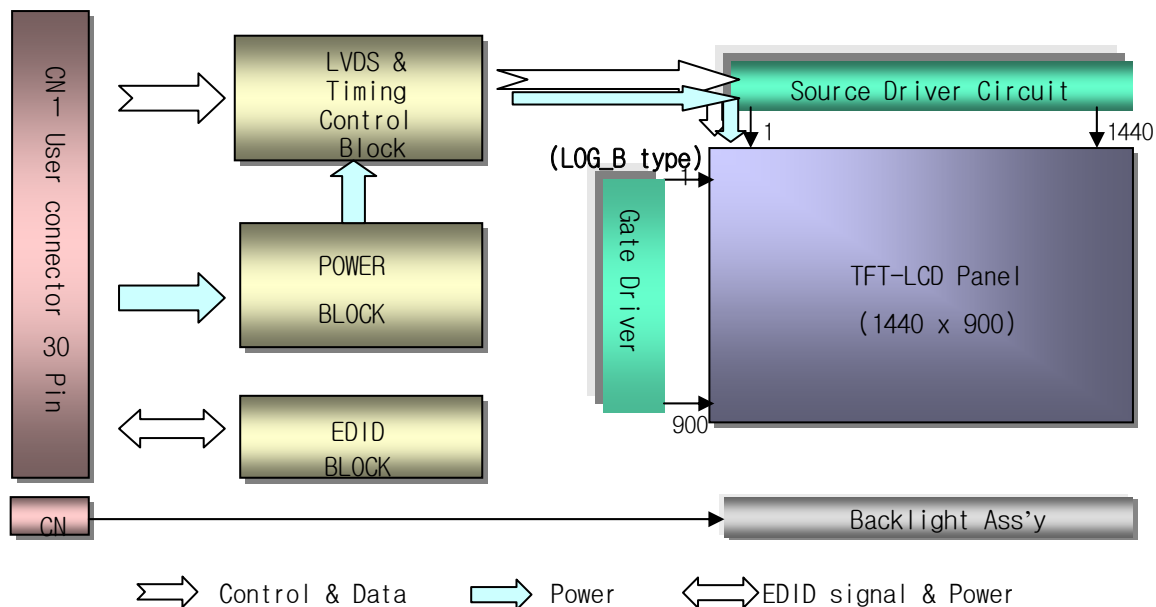
General Features

|	
Active Screen Size	14.1 inches diagonal
Outline Dimension	320 (H) × 206(V) × 5.5(D) mm [Max.]
Pixel Pitch	0.2109 mm × 0.2109 mm
Pixel Format	1440 horiz. By 900 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	220 cd/m^2(Typ.5 point)
Power Consumption	Total 6.0 Watt(Typ.) @ LCM circuit 1.9Watt(Typ.), B/L input 4.1Watt(Typ.)
Weight	435 g (Max.), 425g(Typ.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Anti-glare treatment of the front polarizer
RoHS Comply	Yes

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.

Dry Bulb Temperature [℃]
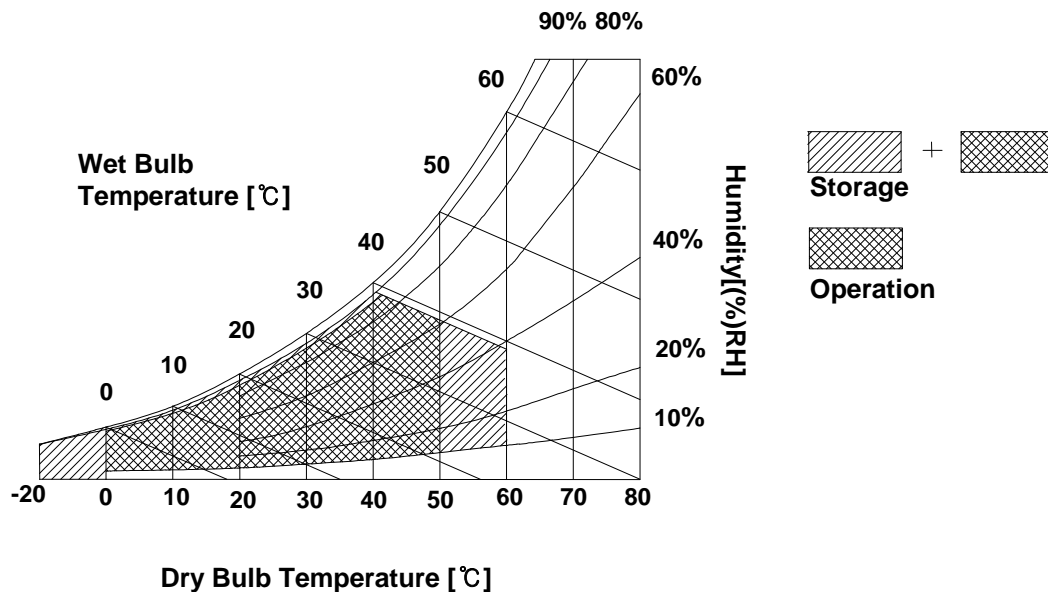
3. Electrical Specifications
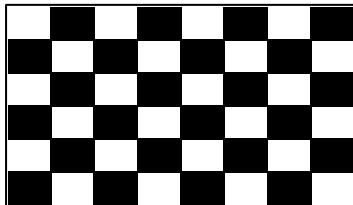
3-1. Electrical Characteristics

The LP141WP1 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V_{DC}	
Power Supply Input Current (Window Desk Top Pattern)	I_{CC}	–	560 (460)	645 (530)	Ma	1
Power Consumption (Window Desk Top Pattern)	Pc	-	1.9 (1.5)	2.2 (1.8)	Watt	1
Differential Impedance	Zm	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V_{BL}	640(7.0)	675(6.0mA)	880(2.0mA)	V_{RMS}	
Operating Current	I_{BL}	2.0	6.0	7.0	mA_{RMS}	3
Power Consumption	P_{BL}	-	4.1	4.5		
Operating Frequency	f_{BL}	50	65	80	kHz	
Discharge Stabilization Time	Ts	-	-	3	Min	4
Life Time		15,000	-	-	Hrs	5
Established Starting Voltage at 25℃ at 0 ℃	Vs			1180 1400	V_{RMS} V_{RMS}	

Note)
1. The specified current and power consumption are under the Vcc = 3.3V , 25℃, fv = 60Hz condition whereas Mosaic pattern is displayed and fv is the frame frequency.


2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
3. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics.
4. Define the brightness of the lamp after being lighted for 5 minutes as 100%, Ts is the time required for the brightness of the center of the lamp to be not less than 95%.
5. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.

LG Display

Product Specification

Note)
6. The output of the inverter must have symmetrical(negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave.
Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
7. It is defined the brightness of the lamp after being lighted for 5 minutes as 100%.
T_S is the time required for the brightness of the center of the lamp to be not less than 95%.
8. The lamp power consumption shown above does not include loss of external inverter.
The applied lamp current is a typical one.
9. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.
It shall help increase the lamp lifetime and reduce leakage current.
  a. The asymmetry rate of the inverter waveform should be less than 10%.
  b. The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.
    * Inverter output waveform had better be more similar to ideal sine wave.

I_p

I_{-p}
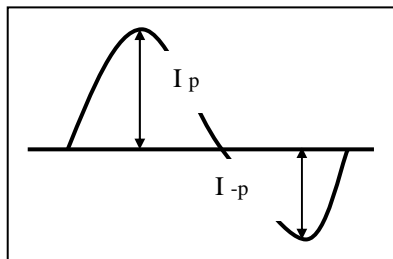
* Asymmetry rate:

$| I_p - I_{-p} | / I_{rms} * 100\%$

* Distortion rate

I_p (or I_{-p}) / I_{rms}

10. Inverter open voltage must be more than lamp voltage for more than 1 second for start-up.
Otherwise, the lamps may not be turned on.
※ Do not attach a conducting tape to lamp connecting wire.
If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.

Ex of current wave)

Normal current wave - Standard

Abnormal current wave - Bad

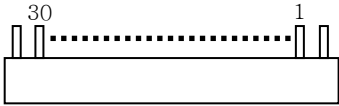**Abnormal current wave - Bad**

Abnormal current wave - Bad

Product Specification

3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

The electronics interface connector is a model FI-XB30SRL-HF11 manufactured by JAE.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	GND	Ground	
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	
4	V EEDID	DDC 3.3V power	
5	BIST	Requested for LCD supplier test point	1, Interface chips
6	Clk EEDID	DDC Clock	1.1 LCD : TLI, Dual LVDS Rx
7	DATA EEDID	DDC Data	1.2 System : it must include international
8	RA1-	Negative LVDS differential data input, R0-R5, G0	standard LVDS Transmitter.
9	RA1+	Positive LVDS differential data input, R0-R5, G0	* Pin to Pin compatible with LVDS
10	GND	Ground	
11	RB1-	Negative LVDS differential data input, G1-G5, B0-B1	2. Connector
12	RB1+	Positive LVDS differential data input, G1-G5, B0-B1	2.1 LCD : GT101-30S-HR11, LGC or
13	GND	Ground	its compatibles
14	RC1-	Negative LVDS differential data input, B2-B5, HS/VS/DE	2.2 Mating : FI-X30M or equivalent.
15	RC1+	Positive LVDS differential data input, B2-B5, HS/VS/DE	2.3 Connector pin arrangement
16	GND	Ground	
17	RCLK1-	Negative LVDS differential clock input	
18	RCLK1+	Positive LVDS differential clock input	30 ▪▪▪▪▪▪▪▪▪▪ 1
19	GND	Ground	
20	RA2-	Negative LVDS differential data input, R0-R5, G0	[LCD Module Rear View]
21	RA2+	Positive LVDS differential data input, R0-R5, G0	
22	GND	Ground	
23	RB2-	Negative LVDS differential data input, G1-G5, B0-B1	
24	RB2+	Positive LVDS differential data input, G1-G5, B0-B1	
25	GND	Ground	
26	RC2-	Negative LVDS differential data input, B2-B5, HS/VS/DE	
27	RC2+	Positive LVDS differential data input, B2-B5, HS/VS/DE	
28	GND	Ground	
29	RCLK2-	Negative LVDS differential clock input	
30	RCLK2+	Positive LVDS differential clock input	

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or Compatible.
The mating connector part number is AMP1674817-2 or equivalent.

Table 4. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)

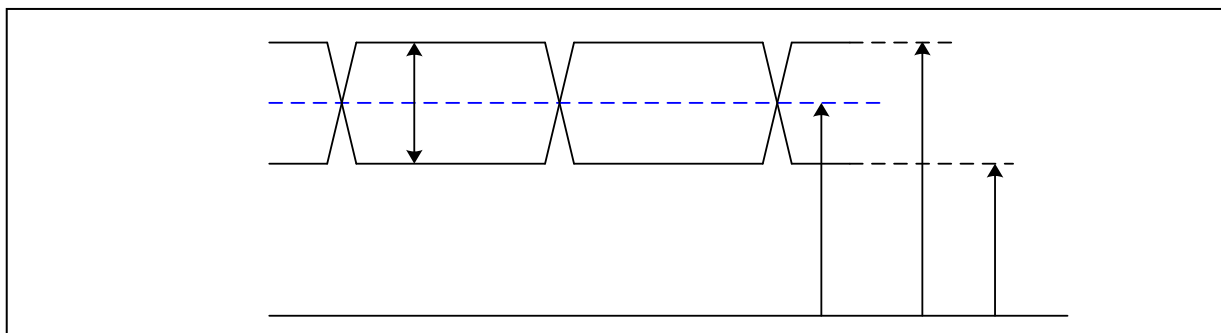| Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored pink and the low voltage side terminal is Black.

LG Display

3-3. LVDS Signal Timing Specifications

3-3-1. DC Specification

Description	Symbol	Min	Max	Unit	Notes
LVDS Differential Voltage	$\lvert V_{ID} \rvert$	100	600	mV	-
LVDS Common mode Voltage	V_{CM}	0.6	1.8	V	-
LVDS Input Voltage Range	V_{IN}	- 0.3	2.1	V	-

3-3-2. AC Specification

$\lvert V_{ID} \rvert = \lvert (LVDS+) - (LVDS-) \rvert$
$V_{CM} = \{(LVDS+) + (LVDS-)\}/2$
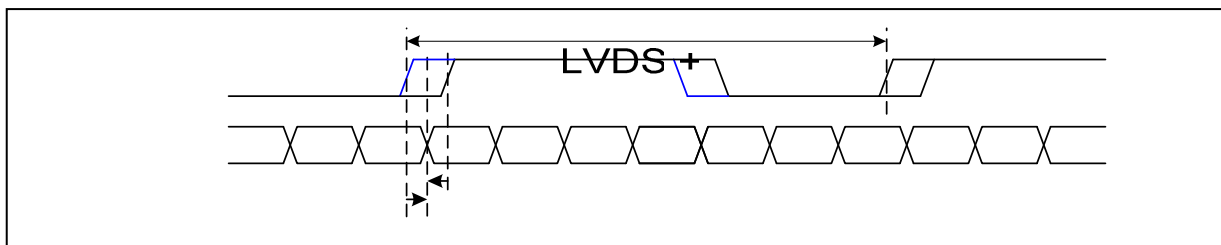
Description	Symbol	Min	Max	Unit	Notes
LVDS Clock to Data Skew Margin	t_{SKEW}	- 400	+ 400	ps	85MHz > Fclk $\geq$ 65MHz
	t_{SKEW}	- 600	+ 600	ps	65MHz > Fclk $\geq$ 25MHz
LVDS Clock to Clock Skew Margin (Even to Odd)	t_{SKEW_EO}	- 1/7	+ 1/7	T_{clk}	-
Maximum deviation of input clock frequency during SSC	F_{DEV}	-	$\pm$ 3	%	-
Maximum modulation frequency of input clock during SSC	F_{MOD}	-	200	KHz	-
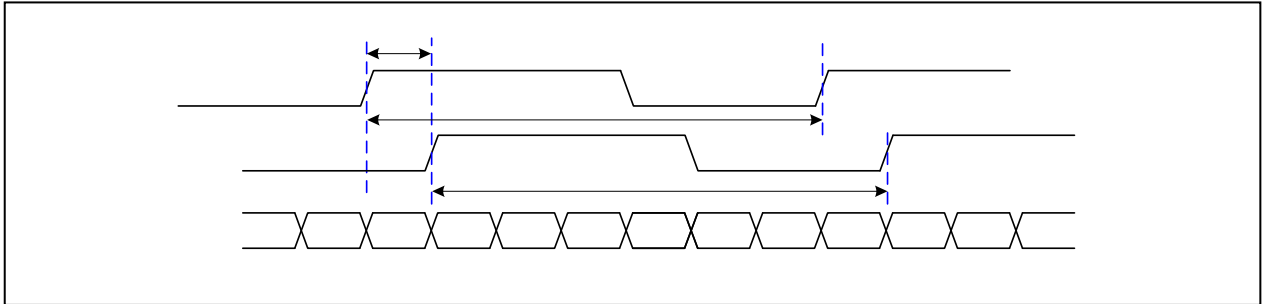
< Clock skew margin between channel >
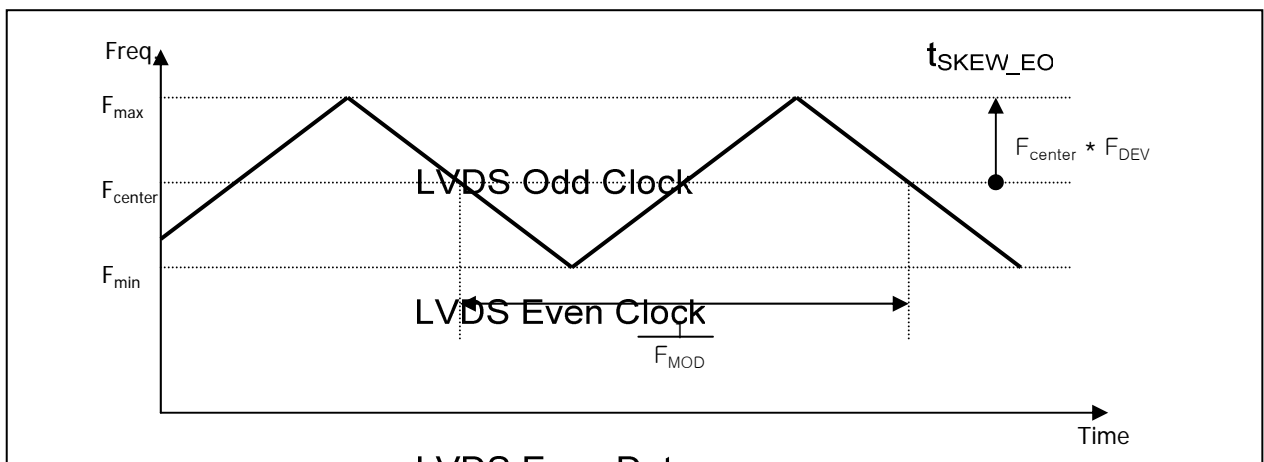
< Spread Spectrum >

3-3-3. Data Format

1) LVDS 2 Port
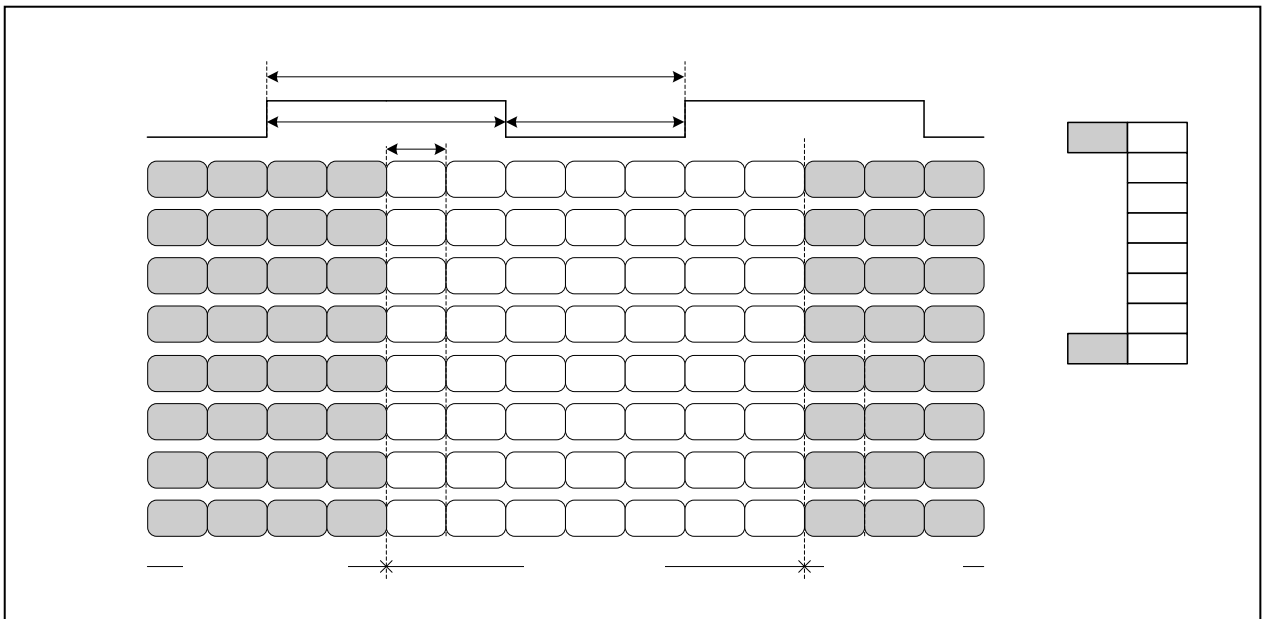
< LVDS Data Format >

3-4. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

Table 6. TIMING TABLE

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	49.5	51	52.5	MHz	
Hsync	Period	Thp	900	916	932	tCLK	
	Width	t_{WH}	12	16	20		
	Width-Active	t_{WHA}	720	720	720		
Vsync	Period	t_{VP}	920	926	939	tHP	
	Width	t_{WV}	3	6	10		
	Width-Active	t_{WVA}	900	900	900		
Data Enable	Horizontal back porch	t_{HBP}	148	156	164	tCLK	
	Horizontal front porch	t_{HFP}	20	24	28		
	Vertical back porch	t_{VBP}	12	17	-	tHP	
	Vertical front porch	t_{VFP}	2	3	-		

3-5. Signal Timing Waveforms

Condition : VCC =3.3V

Data Enable, Hsync, Vsync
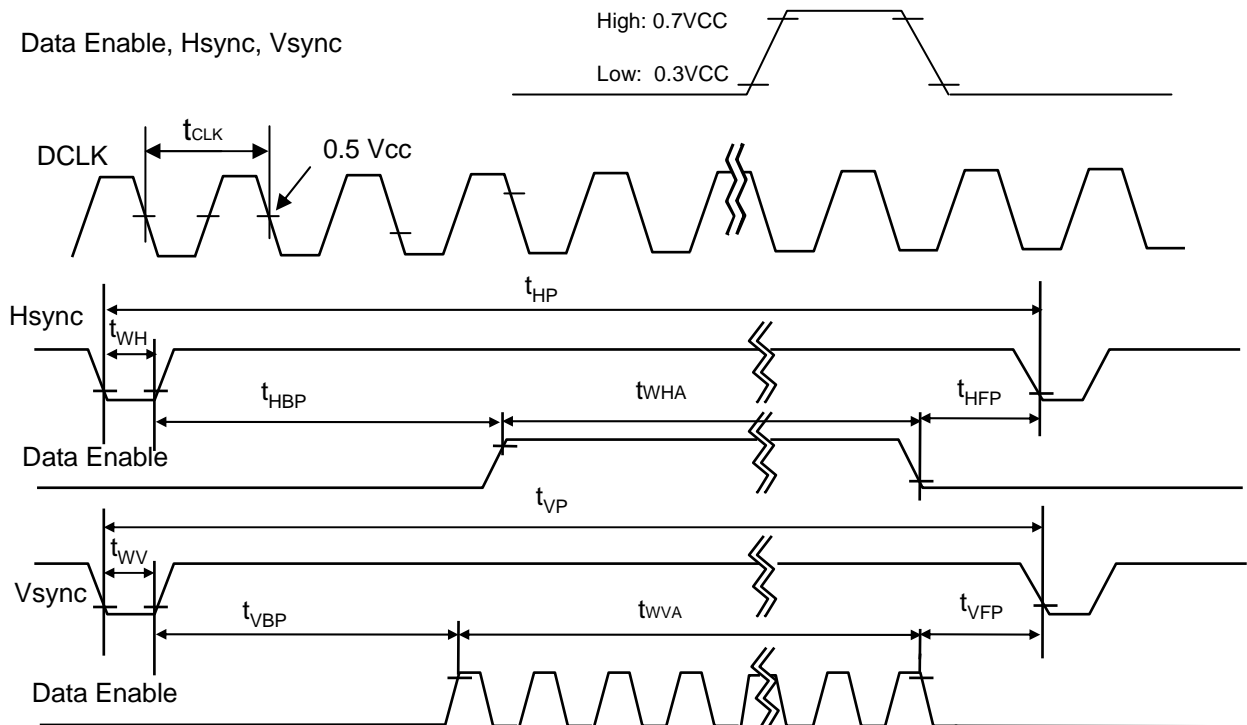
3-6. Color Input Data Reference

The brightness of each primary color (red,green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

| Color		Input Color Data																		
		RED						GREEN						BLUE					
		MSB					LSB	MSB					LSB	MSB					LSB
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	...		...						...						...				
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...		...						...						...				
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...		...						...						...				
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

LG Display

Product Specification
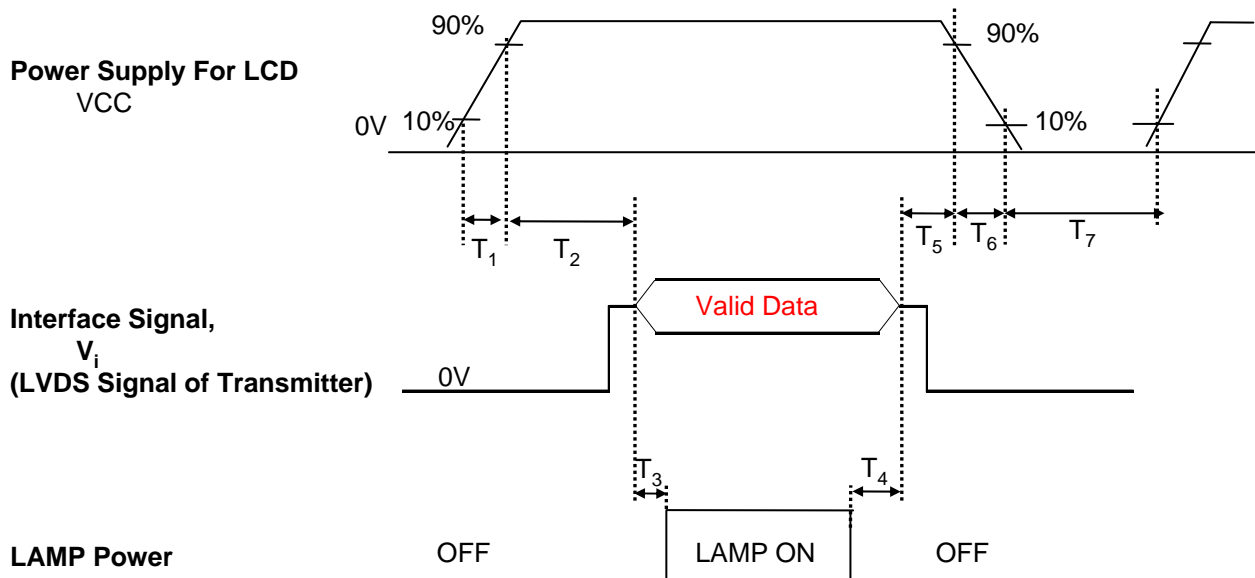
3-7. Power Sequence

Table 8. POWER SEQUENCE TABLE

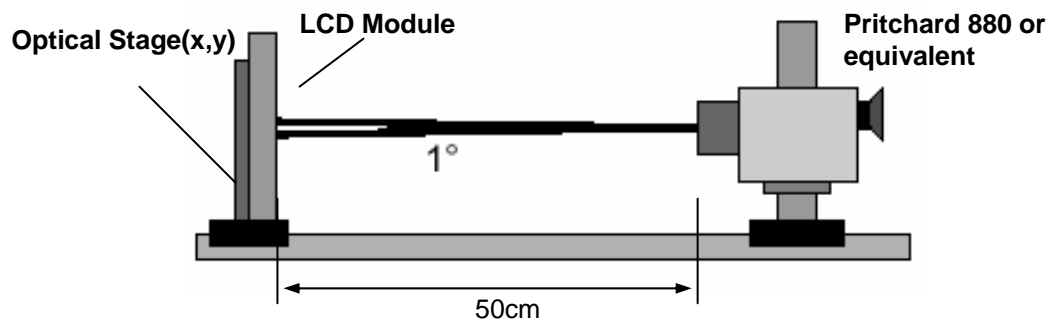| Parameter	Value			Units
	Min.	Typ.	Max.	
T_1	0	-	10	(ms)
T_2	0	-	50	(ms)
T_3	200	-	-	(ms)
T_4	200	-	-	(ms)
T_5	0	-	50	(ms)
T_6	0	-	10	(ms)
T_7	400	-	-	(ms)

Note)
1. Valid Data is Data to meet "3-3. LVDS Signal Timing Specifications"
2. Please avoid floating state of interface signal at invalid period.
3. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
4. Lamp power must be turn on after power supply for LCD and interface signal are valid.

LG Display

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.
FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

Optical Stage(x,y)   **LCD Module**   **Pritchard 880 or equivalent**

1°

50cm

Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, f$_V$=60Hz, f$_{CLK}$= 102MHz, I$_{BL}$= 6.0mA

Parameter	Symbol	Values			Units	Notes
		Min	Typ	MAx		
Contrast Ratio	CR	300	-	-		1
Surface Luminance, white(5P)	L$_{WH}$	185	220	-	cd/m^2	2
Luminance Variation (5P)	δ_{WHITE}	63%	72%			3
(13P)		50%	54%			
Response Time	Tr$_R$+Tr$_D$	-	16	25	ms	4
Color Coordinates						
RED	RX	0.558	0.588	0.618		
	RY	0.316	0.346	0.376		
GREEN	GX	0.298	0.328	0.358		
	GY	0.519	0.549	0.579		
BLUE	BX	0.127	0.157	0.187		
	BY	0.112	0.142	0.172		
WHITE	WX	0.285	0.313	0.341		+/- 0.028
	WY	0.309	0.329	0.349		+/- 0.020
Viewing Angle						5
x axis, right(Φ=0°)	Θr	40	45	-	degree	
x axis, left (Φ=180°)	Θl	40	45	-	degree	
y axis, up (Φ=90°)	Θu	15	20	-	degree	
y axis, down (Φ=270°)	Θd	35	40	-	degree	
Gray Scale						6

LG Display

Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \ldots L_5)$$

3. The variation in surface luminance , The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula. For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \ldots L_{13})}{\text{Minimum}(L_1, L_2, \ldots L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are   determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification   * f_V = 60Hz

Gray Level	Luminance [%] (Typ)
L0	0.3
L7	0.8
L15	4.25
L23	10.90
L31	21.0
L39	34.8
L47	52.5
L55	74.2
L63	100

FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

H,V : ACTIVE AREA
A : H/4 mm
B : V/4 mm
C : 10 mm
D : 10 mm
POINTS : 13 POINTS
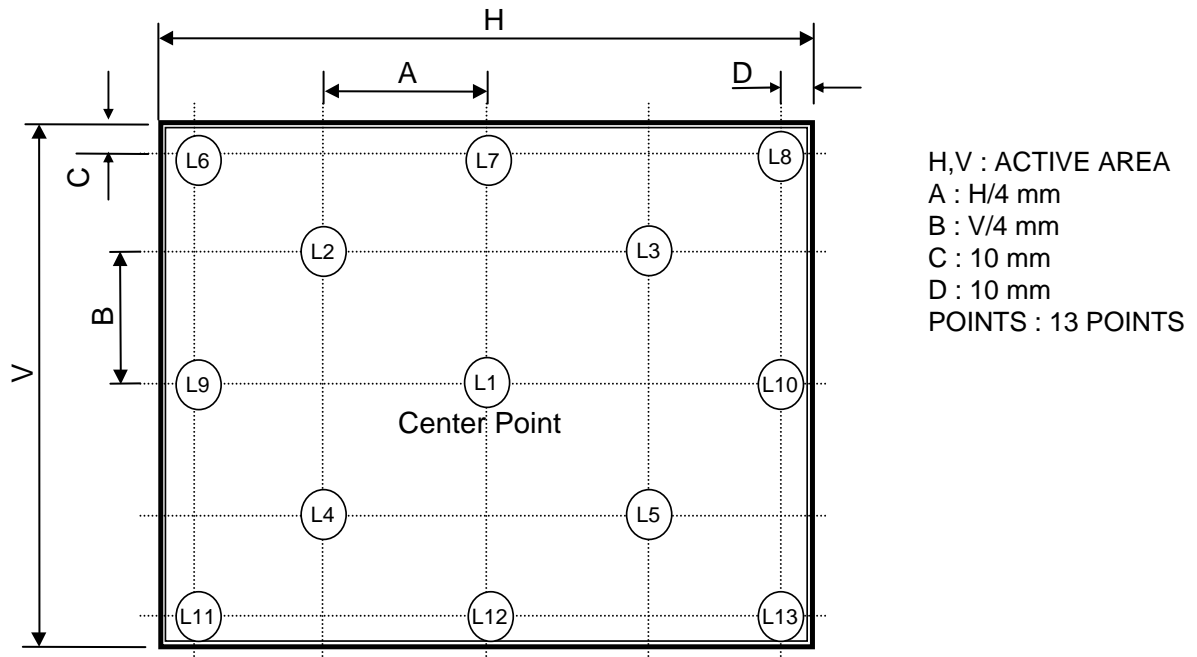
FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

LG Display

Product Specification
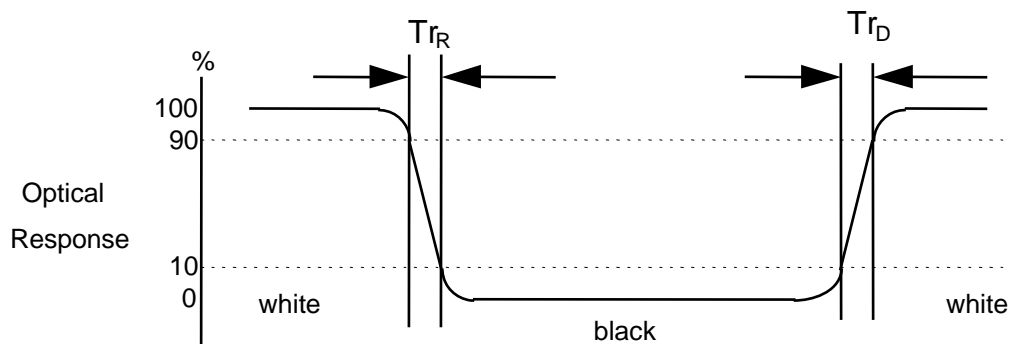
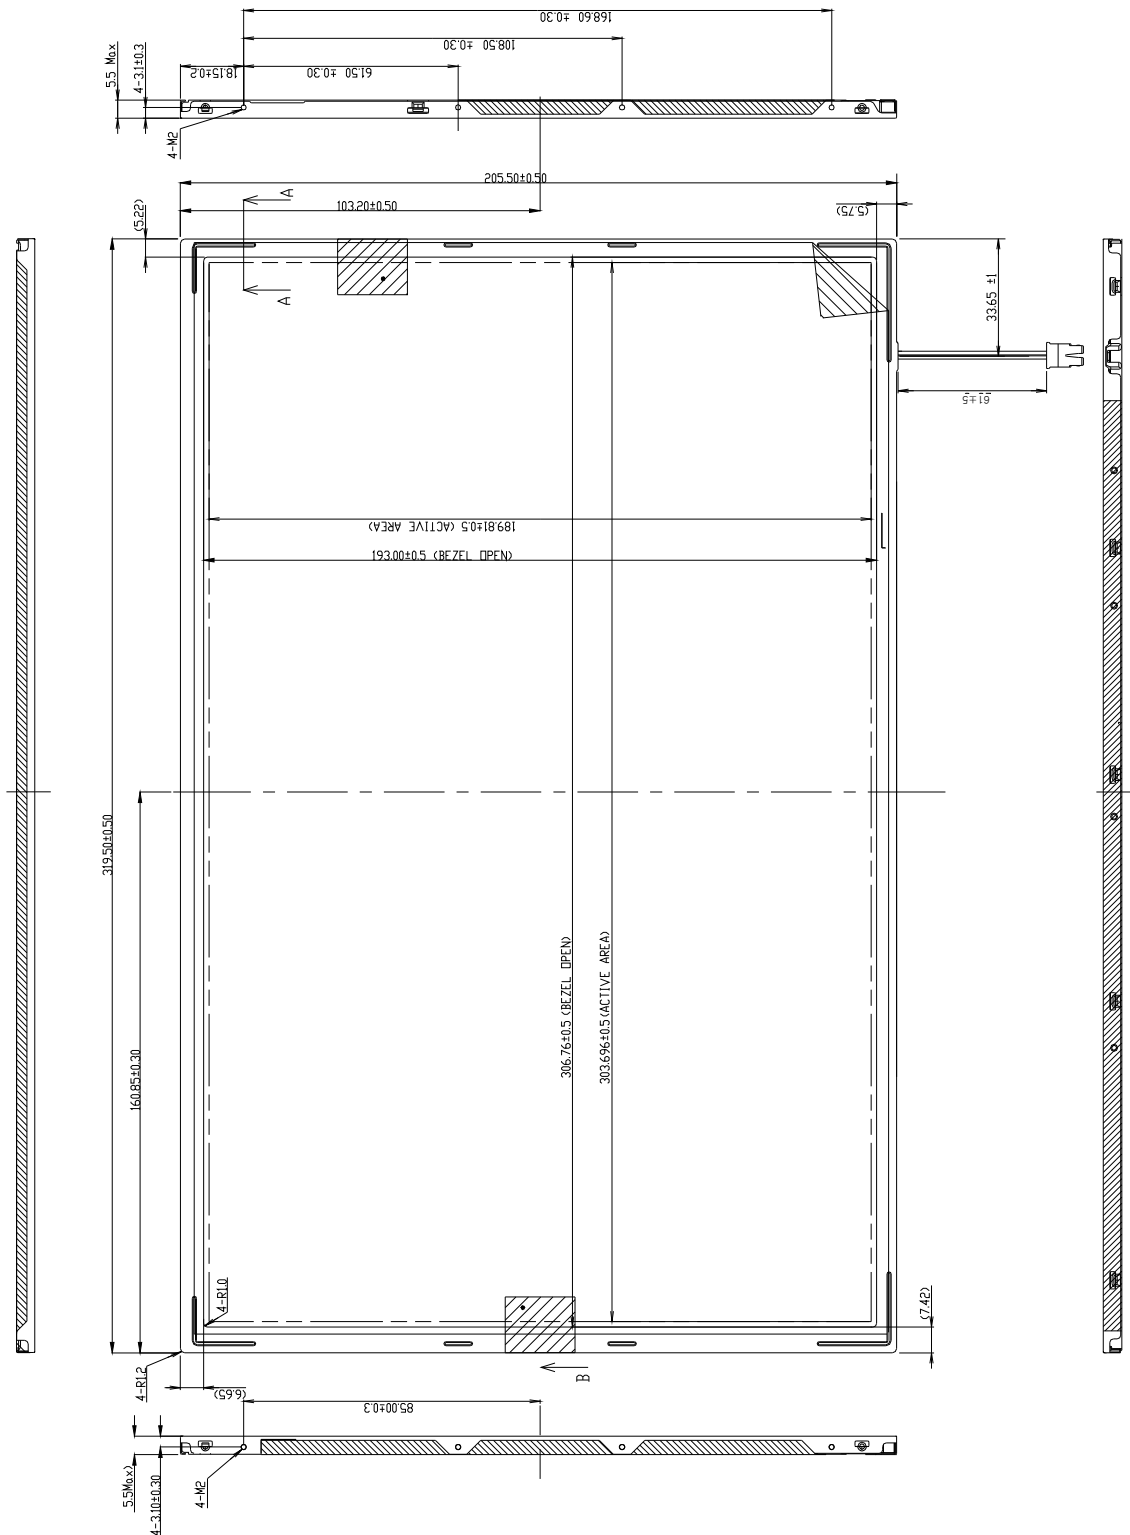## 5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP141WP1.
In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	319.5 $\pm$ 0.5mm
	Vertical	205.5 $\pm$ 0.5mm
	Depth	5.5mm (max)
Bezel Area	Horizontal	306.76 $\pm$ 0.5mm
	Vertical	193 $\pm$ 0.5mm
Active Display Area	Horizontal	303.69 mm
	Vertical	189.81 mm
Weight	425g (Typ.) 435g (Max.)	
Surface Treatment	Anti-glare treatment of the front polarizer	

LG Display

Product Specification

<FRONT VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

<REAR VIEW>   Note) Unit:[mm], General tolerance: ± 0.5mm
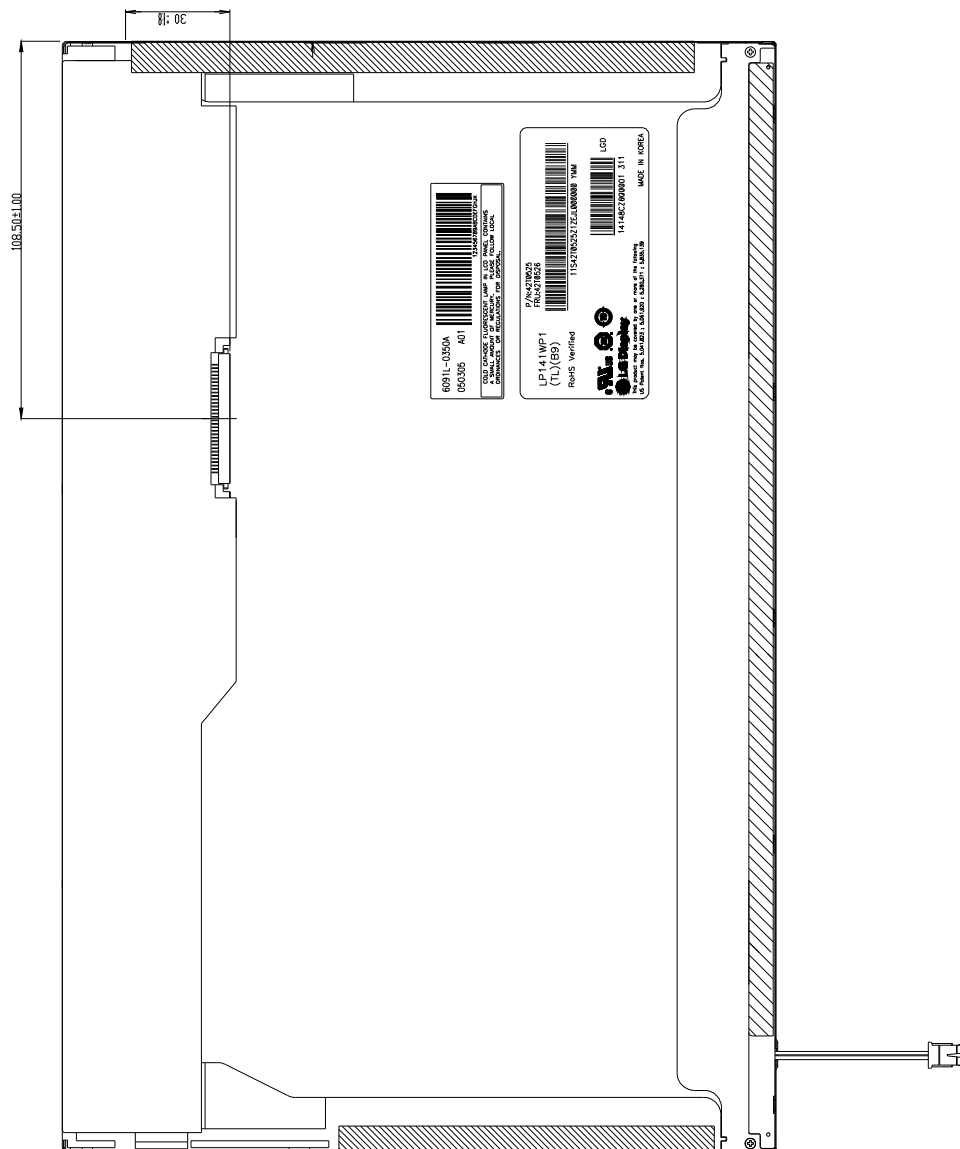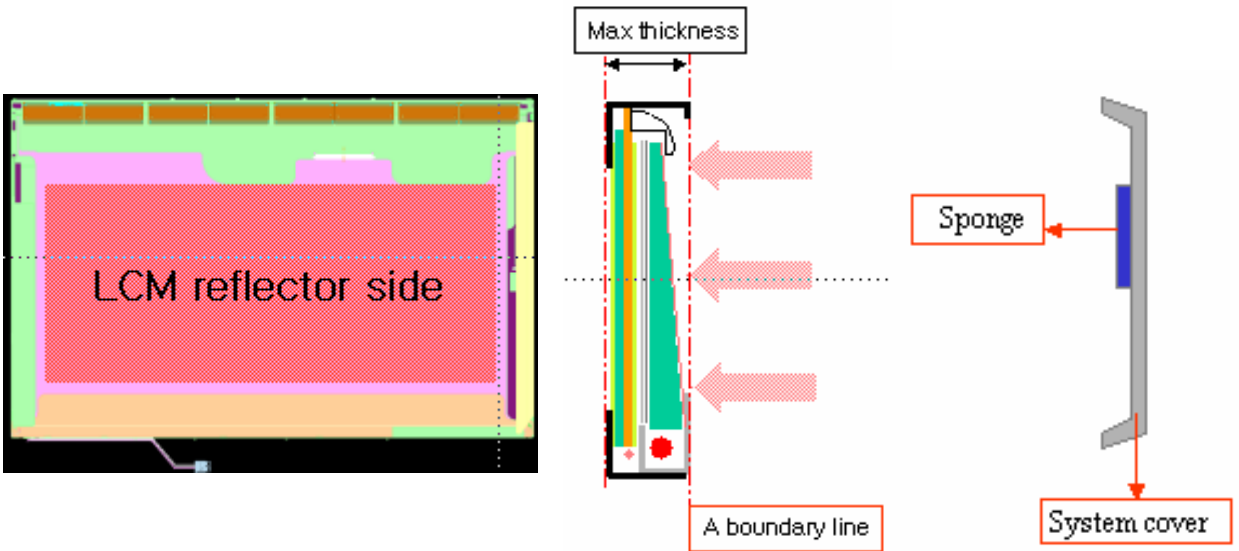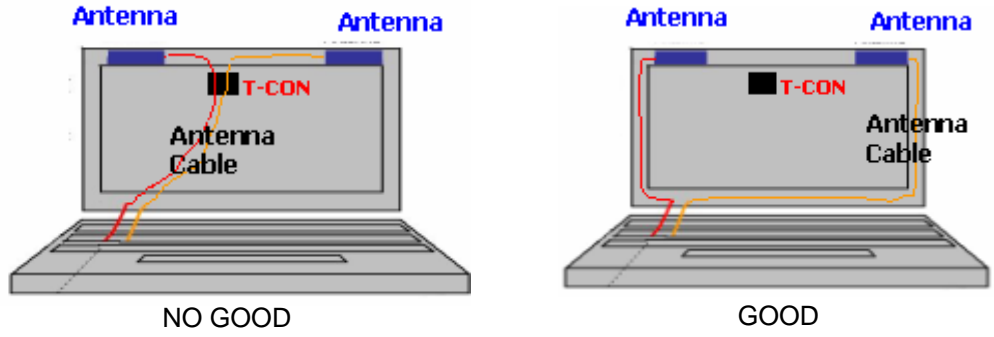
[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

4-M2

SECTION A-A
SCALE 5/1
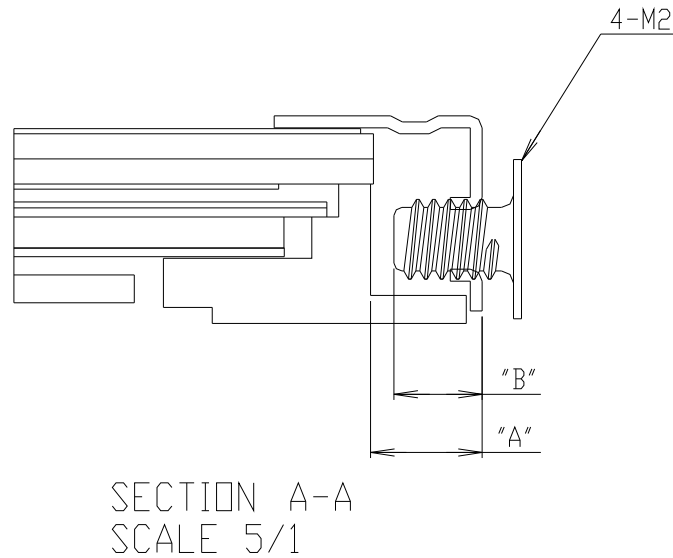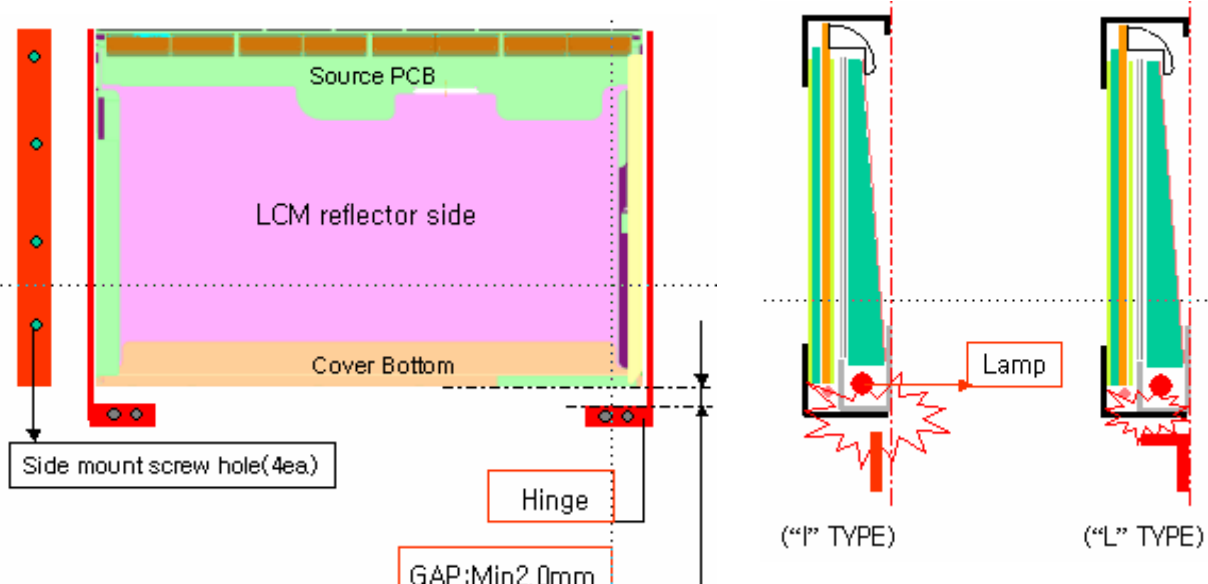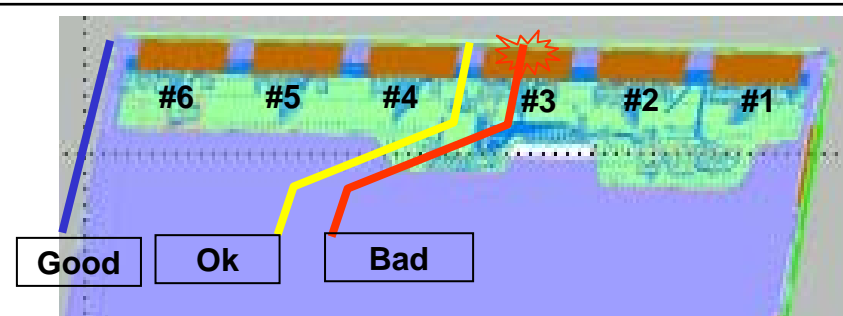
* Screw Torque : 2.5kgf.cm Max

* Screw Hole Depth ("A") : Min 2.5mm

* Screw Penetration Length ("B") : Max 2.5, Min 2.3(LPL can't control)
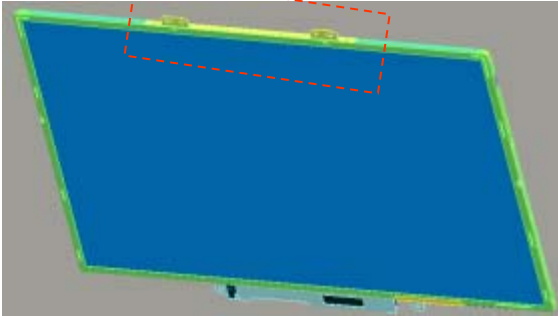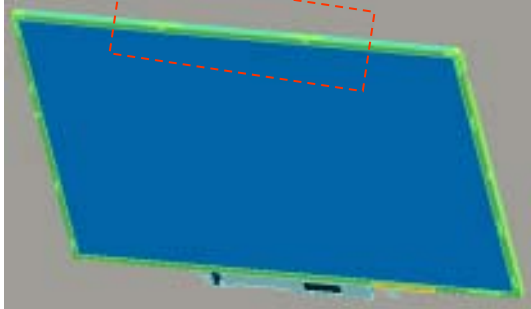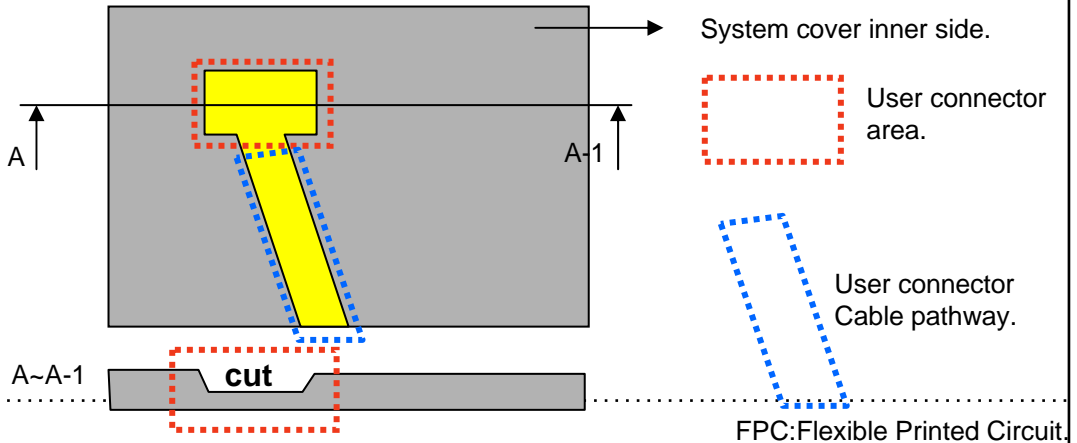
LPL Proposal for system cover design.(Appendix)

1	Gap check for securing the enough gap between LCM and System cover.	

| Define | 1.Rear side of LCM is sensitive against external stress,and previous check about interference is highly needed. |
| | 2.In case there is something from system cover comes into the boundary above,mechanical interference may cause the FOS defects. (Eg:Ripple,White spot..) |

2	Check if antenna cable is sufficiently apart from T-CON of LCD Module.

Define	

| | 1.If system antenna is overlapped with T-CON,it might be cause the noise. |

Product Specification

LPL Proposal for system cover design.

3	Gap check for securing the enough gap between LCM and System hinge.	

Define	1.At least 2.0mm of gap needs to be secured to prevent the shock related defects.
	2."L" type of hinge is recommended than "I" type under shock test.

4	Checking the path of the System wire.

Define	1.COF area needs to be handled with care.
	2.GOOD ➜Wire path design to system side. OK➜ Wire path is located between COFs. BAD➜Wire path overlapped with COF area.

LG Display

Product Specification

LPL Proposal for system cover design.

5	Using a bracket on the top of LCM is not recommended.	

bracket

| With bracket | Without bracket |

Define	1.Condition without bracket is good for mechanical noise,and can minimize the light leakage from deformation of bracket.
	2.The results shows that there is no difference between the condition with or without bracket.

6	Securing additional gap on CNT area..

System cover inner side.

User connector area.

User connector Cable pathway.

A~A-1   **cut**

FPC:Flexible Printed Circuit.

Define	1.CNT area is specially sensitive against external stress,and additional gap by cutting on system cover will be helpful on removing the Ripple.
	2.Using a thinner CNT will be better. (eg: FPC type)

LG Display

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }
 There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

LG Display

Product Specification

7. International Standards

7-1. Safety

a) UL 60950-1:2003, First Edition, Underwriters Laboratories, Inc.,
Standard for Safety of Information Technology Equipment.
b) CAN/CSA C22.2, No. 60950-1-03 1st Ed. April 1, 2003, Canadian Standards Association,
Standard for Safety of Information Technology Equipment.
c) EN 60950-1:2001, First Edition,
European Committee for Electrotechnical Standardization(CENELEC)
European Standard for Safety of Information Technology Equipment.

7-2. EMC

a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHZ to 40GHz. "American National Standards Institute(ANSI), 1992
b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998
(Including A1: 2000)

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M

A,B,C : SIZE(INCH)   D : YEAR
E : MONTH   F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 20ea

b) Box Size : 430 X 334 X 287

8-3. Label Description

Model Name

LP141WP1
(TL)(B9)

RoHS Verified

P/N:42T0525
FRU:42T0526

11S42T0525Z1ZEJL000000 YMM

Lenovo CODE

cUL us . . 10

LG Display

This product may be covered by one or more of the following
US Patent Nos. 5,041,823 ; 5,061,920 ; 5,280,371 ; 5,835,139

14148CZ600001 311   LGD

MADE IN KOREA

LPL CODE

Lot Mark

LPL Code

(1) Model Name : **L P 1 4 1 W P 1 - T L B 9**

- Revision Code
- Product Type
- Display Mode
- Basic Model Serial No.
- Resolution : WXGA+
- Size (inch) : 14.1"
- Application : NBPC
- LGPL Brand Initial: L

(2) Lot Mark : **1 4 1 6 2 K Z 3 0 0 0 0 1**

- SERIAL NO.
- ASSEMBLY CODE
- FACTORY CODE
- MONTH
- YEAR
- SIZE

Lenovo Code

1)P/N : 42T0525

2)FRU : 42T0526

9. PRECAUTIONS

   Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

(1) You must mount a module using holes arranged in four corners or four sides.
(2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
(3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
(4) You should adopt radiation structure to satisfy the temperature specification.
(5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
(6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
     Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
(7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
(8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
(9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

(1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
     V=$\pm$ 200mV(Over and under shoot voltage)

(2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
(3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
     And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
(4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
(5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
(6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

(1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
(2) The polarizer surface should not come in contact with any other object.
    It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

(1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
(2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
    Please carefully peel off the protection film without rubbing it against the polarizer.
(3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
(4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™)   1/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)		Value (binary)	
0	00	Header	0	0	0000 0000	Header
1	01		F	F	1111 1111	
2	02		F	F	1111 1111	
3	03		F	F	1111 1111	
4	04		F	F	1111 1111	
5	05		F	F	1111 1111	
6	06		F	F	1111 1111	
7	07		0	0	0000 0000	
8	08	ID system Manufacturer Name = LEN	3	0	0011 0000	Vender/ Product ID
9	09	EISA manufacturer code(Compressed ACSⅡ)	A	E	1010 1110	
10	0A	ID System - Product code = WXGA+(4033)	3	3	0011 0011	
11	0B	Panel Supplier Reserved - Product code	4	0	0100 0000	
12	0C	LCD Module Serial No. = 0 (If not used)	0	0	0000 0000	
13	0D	LCD Module Serial No. = 0 (If not used)	0	0	0000 0000	
14	0E	LCD Module Serial No. = 0 (If not used)	0	0	0000 0000	
15	0F	LCD Module Serial No. = 0 (If not used)	0	0	0000 0000	
16	10	Week of manufacture	0	0	0000 0000	
17	11	Year of manufacture = 2008	1	2	0001 0010	
18	12	EDID Structure version # = 1	0	1	0000 0001	EDID Version/ Revision
19	13	EDID Revision # = 3	0	3	0000 0011	
20	14	Video input definition = Digital I/p ,non TMDS CRGB	8	0	1000 0000	Display Parameter
21	15	Max H image size(cm) = 30.374cm(30)	1	E	0001 1110	
22	16	Max V image size(cm) = 18.984cm(19)	1	3	0001 0011	
23	17	Display gamma = 2.20	7	8	0111 1000	
24	18	Feature support(DPMS) = Active off, RGB Color	E	A	1110 1010	
25	19	Red/Green low Bits	A	E	1010 1110	Color Characteristic
26	1A	Blue/White Low Bits	1	0	0001 0000	
27	1B	Red X Rx = 0.588	9	6	1001 0110	
28	1C	Red Y Ry = 0.346	5	8	0101 1000	
29	1D	Green X Gx = 0.328	5	3	0101 0011	
30	1E	Green Y Gy = 0.549	8	C	1000 1100	
31	1F	Blue X Bx = 0.157	2	8	0010 1000	
32	20	Blue Y By = 0.142	2	4	0010 0100	
33	21	White X Wx = 0.313	5	0	0101 0000	
34	22	White Y Wy = 0.329	5	4	0101 0100	
35	23	Established Timing I	0	0	0000 0000	Established Timings
36	24	Established Timing II	0	0	0000 0000	
37	25	Manufacturer's Timings	0	0	0000 0000	
38	26	Standard Timing Identification 1 was not used	0	1	0000 0001	Standard Timing ID
39	27	Standard Timing Identification 1 was not used	0	1	0000 0001	
40	28	Standard Timing Identification 2 was not used	0	1	0000 0001	
41	29	Standard Timing Identification 2 was not used	0	1	0000 0001	
42	2A	Standard Timing Identification 3 was not used	0	1	0000 0001	
43	2B	Standard Timing Identification 3 was not used	0	1	0000 0001	
44	2C	Standard Timing Identification 4 was not used	0	1	0000 0001	
45	2D	Standard Timing Identification 4 was not used	0	1	0000 0001	
46	2E	Standard Timing Identification 5 was not used	0	1	0000 0001	
47	2F	Standard Timing Identification 5 was not used	0	1	0000 0001	
48	30	Standard Timing Identification 6 was not used	0	1	0000 0001	
49	31	Standard Timing Identification 6 was not used	0	1	0000 0001	
50	32	Standard Timing Identification 7 was not used	0	1	0000 0001	
51	33	Standard Timing Identification 7 was not used	0	1	0000 0001	
52	34	Standard Timing Identification 8 was not used	0	1	0000 0001	
53	35	Standard Timing Identification 8 was not used	0	1	0000 0001	

LG Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™)   2/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)		Value (binary)	
54	36	1440 X 900 @ 60Hz mode : pixel clock = 102MHz	D	8	1101 1000	
55	37	(Stored LSB first)	2	7	0010 0111	
56	38	Horizontal Active = 1440 pixels	A	0	1010 0000	
57	39	Horizontal Blanking = 392 pixels	8	8	1000 1000	
58	3A	Horizontal Active : Horizontal Blanking = 1440 : 392	5	1	0101 0001	
59	3B	Vertical Avtive = 900 lines	8	4	1000 0100	
60	3C	Vertical Blanking = 26 lines	1	A	0001 1010	
61	3D	Vertical Active : Vertical Blanking = 900 : 26	3	0	0011 0000	Timing Descriptor #1
62	3E	Horizontal Sync. Offset = 48 pixels	3	0	0011 0000	
63	3F	Horizontal Sync Pulse Width = 32 pixels	2	0	0010 0000	
64	40	Vertical Sync Offset = 3 lines, Sync Width = 6 lines	3	6	0011 0110	
65	41	Horizontal Vertical Sync Offset/Width upper 2bits = 0	0	0	0000 0000	
66	42	Horizontal Image Size = 303.696mm(304)	3	0	0011 0000	
67	43	Vertical Image Size = 189.81mm(190)	B	E	1011 1110	
68	44	Horizontal & Vertical Image Size	1	0	0001 0000	
69	45	Horizontal Border = 0	0	0	0000 0000	
70	46	Vertical Border = 0	0	0	0000 0000	
71	47	Non-interlaced,Normal display,no stereo,Digital separate sync,H/V pol negatives	1	9	0001 1001	
72	48	1440 X 900 @ 50Hz mode : pixel clock = 85MHz	3	4	0011 0100	
73	49	(Stored LSB first)	2	1	0010 0001	
74	4A	Horizontal Active = 1440 pixels	A	0	1010 0000	
75	4B	Horizontal Blanking = 392 pixels	8	8	1000 1000	
76	4C	Horizontal Active : Horizontal Blanking = 1440 : 392	5	1	0101 0001	
77	4D	Vertical Avtive = 900 lines	8	4	1000 0100	
78	4E	Vertical Blanking = 26 lines	1	A	0001 1010	
79	4F	Vertical Active : Vertical Blanking = 900 : 26	3	0	0011 0000	Detailed Timing Description #2
80	50	Horizontal Sync. Offset = 48 pixels	3	0	0011 0000	
81	51	Horizontal Sync Pulse Width = 32 pixels	2	0	0010 0000	
82	52	Vertical Sync Offset = 3 lines, Sync Width = 6 lines	3	6	0011 0110	
83	53	Horizontal Vertical Sync Offset/Width upper 2bits = 0	0	0	0000 0000	
84	55	Horizontal Image Size = 303.696mm(304)	3	0	0011 0000	
85	55	Vertical Image Size = 189.81mm(190)	B	E	1011 1110	
86	56	Horizontal & Vertical Image Size	1	0	0001 0000	
87	57	Horizontal Border = 0	0	0	0000 0000	
88	58	Vertical Border = 0	0	0	0000 0000	
89	59	Non-interlaced,Normal display,no stereo,Digital separate sync,H/V pol negatives	1	9	0001 1001	
90	5A	Flag	0	0	0000 0000	
91	5B	Flag	0	0	0000 0000	
92	5C	Flag	0	0	0000 0000	
93	5D	Data Type Tag(Descriptor Defined by manufacturer)	0	F	0000 1111	
94	5E	Flag	0	0	0000 0000	
95	5F	(Horizontal active pixel/8)-31 149	9	5	1001 0101	
96	60	Image Aspect Ratio(15:9) 16:10	0	A	0000 1010	Detailed Timing Description #3
97	61	Low Refresh Rate #1(50Hz) 50Hz	3	2	0011 0010	
98	62	(Horizontal active pixel/8)-31 149	9	5	1001 0101	
99	63	Image Aspect Ratio(15:9) 16:10	0	A	0000 1010	
100	64	Low Refresh Rate #2(40Hz) 40Hz	2	8	0010 1000	
101	65	Brightness(1/10nit) 200nit	1	4	0001 0100	
102	66	Feature flag(TN mode)	0	1	0000 0001	
103	67	Reserved 00h	0	0	0000 0000	
104	68	EISA manufacturer code(3 Character ID) LPL	3	2	0011 0010	
105	69	Compressed ASCII	0	C	0000 1100	
106	6A	Panel Supplier Reserved - Product code	0	0	0000 0000	
107	6B	(Hex,LSB first)	0	0	0000 0000	

LG Display

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™)   3/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)		Value (binary)	
108	6C	Detailed Timing Descriptor #4	0	0	0000 0000	
109	6D		0	0	0000 0000	
110	6E		0	0	0000 0000	
111	6F		F	E	1111 1110	
112	70		0	0	0000 0000	
113	71	L	4	C	0100 1100	Detailed
114	72	P	5	0	0101 0000	Timing
115	73	1	3	1	0011 0001	Description
116	74	4	3	4	0011 0100	#4
117	75	1	3	1	0011 0001	
118	76	W	5	7	0101 0111	
119	77	P	5	0	0101 0000	
120	78	1	3	1	0011 0001	
121	79	–	2	D	0010 1101	
122	7A	T	5	4	0101 0100	
123	7B	L	4	C	0100 1100	
124	7C	B	4	2	0100 0010	
125	7D	9	3	9	0011 1001	
126	7E	Extension flag = 00	0	0	0000 0000	Extension Flag
127	7F	Checksum	9	B	1001 1011	Checksum