




Product Specification

AU OPTRONICS CORPORATION

() Preliminary Specifications

(V) Final Specifications

| | |
|--|---|
| Module | 11.6"(11.58") HD 16:9 Color TFT-LCD with LED Backlight design |
| Model Name | B116XAK01.1 (HW:3A) |
| Note () | <i>oTP Lite Display</i> |

Customer

Date

Checked &
Approved by

Date

Note: This Specification is subject to change without notice.

Approved by

Date

Marcus Yen

2018/09/06

Prepared by

Date

Doremi Fang

2018/09/06

AU Optronics corporation



Contents

| | |
|---|-----------|
| 1. Handling Precautions | 4 |
| 2. General Description | 5 |
| 2.1 General Specification | 5 |
| 2.2 General Touch Specification | 7 |
| 2.3 Optical Characteristics | 8 |
| 3. Functional Block Diagram | 13 |
| 4. Absolute Maximum Ratings | 14 |
| 4.1 Absolute Ratings of TFT LCD Module | 14 |
| 4.2 Absolute Ratings of Touch Sensor Module | 14 |
| 4.3 Absolute Ratings of Environment | 14 |
| 5. Electrical Characteristics..... | 15 |
| 5.1 TFT LCD Module..... | 15 |
| 5.2 Backlight Unit | 18 |
| 5.3 Touch Sensor Module..... | 19 |
| 6. Signal Interface Characteristic..... | 20 |
| 6.1 Pixel Format Image | 20 |
| 6.2 Integration Interface Requirement..... | 21 |
| 6.3 Interface Timing | 23 |
| 6.4 Power ON/OFF Sequence | 25 |
| 7. Panel Reliability Test | 28 |
| 7.1 Vibration Test | 28 |
| 7.2 Shock Test | 28 |
| 7.3 Reliability Test..... | 28 |
| 8. Mechanical Characteristics..... | 29 |
| 8.1 Total Solution Outline Dimension..... | 29 |
| 9. Shipping and Package | 31 |
| 9.1 Shipping Label Format | 31 |
| 9.2 Shipping Package of Palletizing Sequence..... | 31 |
| 10. Appendix:..... | 32 |
| 10.1 EDID Description..... | 32 |



Product Specification

AU OPTRONICS CORPORATION

Record of Revision

| Version and Date | Page | Old description | New Description | Remark |
|------------------|------|----------------------------------|--|--------|
| 0.1 2018/04/10 | All | First Edition for Customer | | |
| 0.2 2018/07/04 | 15 | PDD=0.9max@mosaic IDD= 340max | PDD=0.9typ@mosaic&1.12max@RGB IDD= 373max | |
| 1.0 2018/08/07 | 7 | TP F/W Ver = 56.04 | TP F/W Ver = 56.06 | |
| | All | | Final Spec | |
| 1.1 2018/09/06 | 24 | | Drawing updated | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 10) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentarily. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 11) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 12) Disconnecting power supply before handling LCD modules, it can prevent electric shock, DO NOT TOUCH the electrode parts, cables, connectors and LED circuit part of TFT module that a LED light bar build in as a light source of back light unit. It can prevent electrostatic breakdown.

2. General Description

B116XAK01.1 is a Color Active Matrix Liquid Crystal Display composed of a TFT LCD panel, a driver circuit, and LED backlight system. The screen format is intended to support the 16:9 HD, 1366(H) x 768(V) screen and 262k colors (RGB 6-bits data driver) with LED backlight driving circuit. All input signals are eDP (Embedded DisplayPort) interface compatible.

B116XAK01.1 is designed for a display unit of notebook style personal computer and industrial machine.

2.1 General Specification

The following items are characteristics summary on the table at 25 °C condition:

| Items | Unit | Specifications | | | |
|---|----------------------|--|--------|--------|--------|
| Screen Diagonal | [mm] | 294.09 (11.58W") | | | |
| Active Area | [mm] | 256.125(H) x 144(V) | | | |
| Pixels H x V | | 1366x3(RGB) x 768 | | | |
| Pixel Pitch | [mm] | 0.1875 x 0.1875 | | | |
| Pixel Format | | R.G.B. Vertical Stripe | | | |
| Display Mode | | Normally Black (AHVA) | | | |
| White Luminance (I _{LED} =25mA) (Note: I _{LED} is LED current) | [cd/m ²] | 220 typ. (5 points average) 187 min. (5 points average) | | | |
| Luminance Uniformity | | 1.25 max. (5 points) | | | |
| Contrast Ratio | | 800 typ | | | |
| Response Time | [ms] | 27 typ / 35 Max | | | |
| Nominal Input Voltage VDD | [Volt] | +3.3 typ. | | | |
| Power Consumption | [Watt] | 2.6 max (Include Logic and Blu power) mosaic LCD only | | | |
| Weight | [Grams] | 200 g max (Total Solution) ¹ | | | |
| Physical Size | [mm] | | Min. | Typ. | Max. |
| | | Length | 277.5 | 278.0 | 278.5 |
| | | Width | 167.52 | 168.02 | 168.52 |

¹ Total solution max weight includes touch sensor and FPCA.



Product Specification

AU OPTRONICS CORPORATION

| | | | | | |
|---|--------------|---------------------------|--------|--------|-------------------------------------|
| | | Thickness | - | - | 3.0 (Panel Side) 3.2 (PCBA Side) |
| Total solution [Note: Touch module] | [mm] | | Min. | Typ. | Max. |
| | | Length | 277.5 | 278.0 | 278.5 |
| | | Width | 167.52 | 168.02 | 168.52 |
| | | Thickness | - | - | 3.0 (Panel Side) 3.2 (PCBA Side) |
| Electrical Interface | | 1 Lane eDP 1.2 | | | |
| Glass Thickness | [mm] | 0.4 | | | |
| Surface Treatment | | Glare | | | |
| Support Color | | 262K colors (RGB 6-bit) | | | |
| Temperature Range Operating Storage (Non-Operating) | [°C] [°C] | 0 to +50 -20 to +60 | | | |
| RoHS Compliance | | RoHS Compliance | | | |



2.2 General Touch Specification

| Item | Spec | Unit |
|--------------------------|------------------------------------|------|
| Type of Touch Sensor | Projective Capacitive | |
| Panel Size | 11.6" | |
| Outline Dimension | 278.5 * 168.52 max (Panel only) | mm |
| Total Thickness | 3.2 max (Panel only) | mm |
| Total Weight | 200 max (Panel only) | g |
| TP View Area | NA | mm |
| TP Active Area | 258.55 X 146.4 typ | mm |
| Interface | I2C | |
| Report Rate | Follow Chrome | Hz |
| Multi-Touch Point | 10 points | |
| Input method | Finger | |
| Touch panel sensor IC | Elan (eKTH5012AY) | |
| Channel | 56 x 32 | |
| Distance between 2 point | Follow Chrome | mm |
| Surface hardness | 3 (Note 1) | H |
| Surface treatment | Glare | |
| TP F/W version | 56.06 | |
| Support OS | Chrome | |

Note1: Polarizer Test condition: Working speed: 50cycle/min 、 Moves distance: 100mm/sec (Exceptions to the rubber tip of the diameter is 6mm) 、 Measuring Process: The Load force and the friction material are fixed on 25mm diameter cylinder tooling. Polarizer pasted on bare glass and the start to test. 、 Inspect on the 500/1000/1500/2000 cycles.




2.3 Optical Characteristics


The optical characteristics are measured under stable conditions at 25°C (Room Temperature) :

| Item | | Symbol | Conditions | Min. | Typ. | Max. | Unit | Note |
|---|-------|--------|--------------------------------------|-------|-------|-------|--------|----------|
| White Luminance ILED=25mA (Base Panel Only) | | | 5 points average | 187 | 220 | - | cd/m2 | 1, 4, 5. |
| Viewing Angle | | θR | Horizontal (Right) CR = 10 (Left) | --- | 85 | - | degree | 4, 9 |
| | | θL | | --- | 85 | - | | |
| | | ψH | Vertical (Upper) CR = 10 (Lower) | --- | 85 | - | | |
| | | ψL | | --- | 85 | - | | |
| Luminance Uniformity | | δ5P | 5 Points | - | - | 1.25 | | 1, 3, 4 |
| Luminance Uniformity | | δ13P | 13 Points | - | - | 1.6 | | 2, 3, 4 |
| Contrast Ratio | | CR | | --- | 800 | - | | 4, 6 |
| Cross talk | | % | | | | 4 | | 4, 7 |
| Response Time | | TRT | Rising + Falling | - | 27 | 35 | | |
| Color / Chromaticity Coordinates | Red | Rx | CIE 1931 | 0.560 | 0.590 | 0.620 | - | 4 |
| | | Ry | | 0.320 | 0.350 | 0.380 | | |
| | Green | Gx | | 0.302 | 0.332 | 0.362 | | |
| | | Gy | | 0.544 | 0.574 | 0.604 | | |
| | Blue | Bx | | 0.126 | 0.156 | 0.186 | | |
| | | By | | 0.081 | 0.111 | 0.141 | | |
| | White | Wx | | 0.283 | 0.313 | 0.343 | | |
| | | Wy | | 0.299 | 0.329 | 0.359 | | |
| NTSC | | % | | - | 50 | - | | |

Note 1: 5 points position (Ref: Active area)

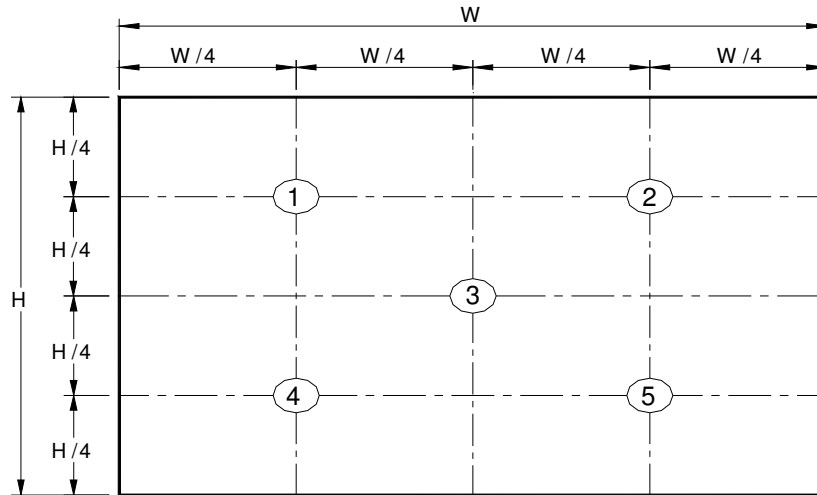

Note 2: 13 points position (Ref: Active area)

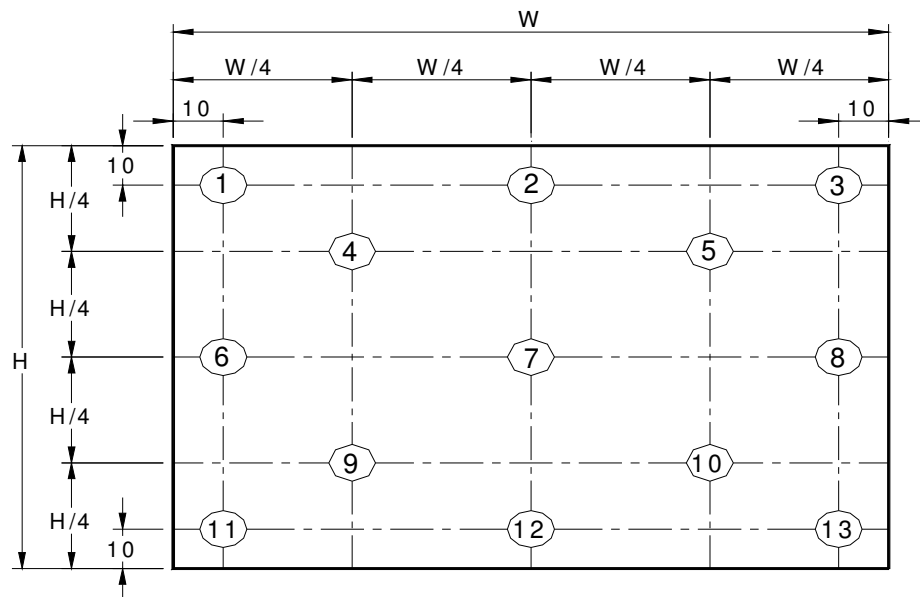


Note 3: The luminance uniformity of 5 or 13 points is defined by dividing the maximum luminance values by the minimum test point luminance

$$\delta_{W5} = \frac{\text{Maximum Brightness of five points}}{\text{Minimum Brightness of five points}}$$

$$\delta_{W13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

Note 4: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room, and it should be measured in the center of screen.

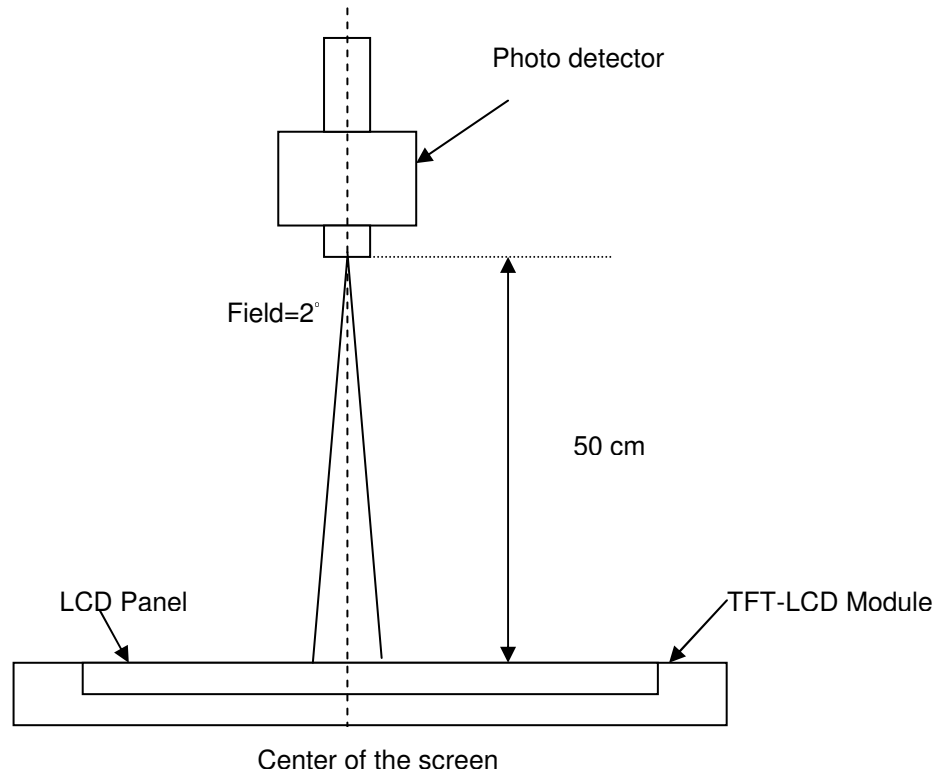

Note 5 : Definition of Average Luminance of White (Y_L):

Measure the luminance of gray level 63 at 5 points , $Y_L = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$

$L(x)$ is corresponding to the luminance of the point X at Figure in Note (1).

Note 6 : Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 7 : Definition of Cross Talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where


Y_A = Luminance of measured location without gray level 0 pattern (cd/m²)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m²)

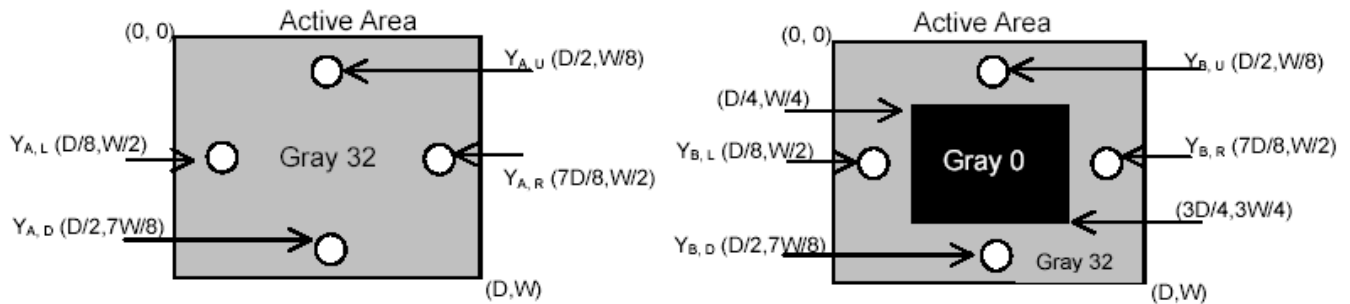


Note 8: Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from "Black" to "White" (rising time) and from "White" to "Black" (falling time), respectively. The response time interval between the 10% and 90% of amplitudes. Refer to figure as below.

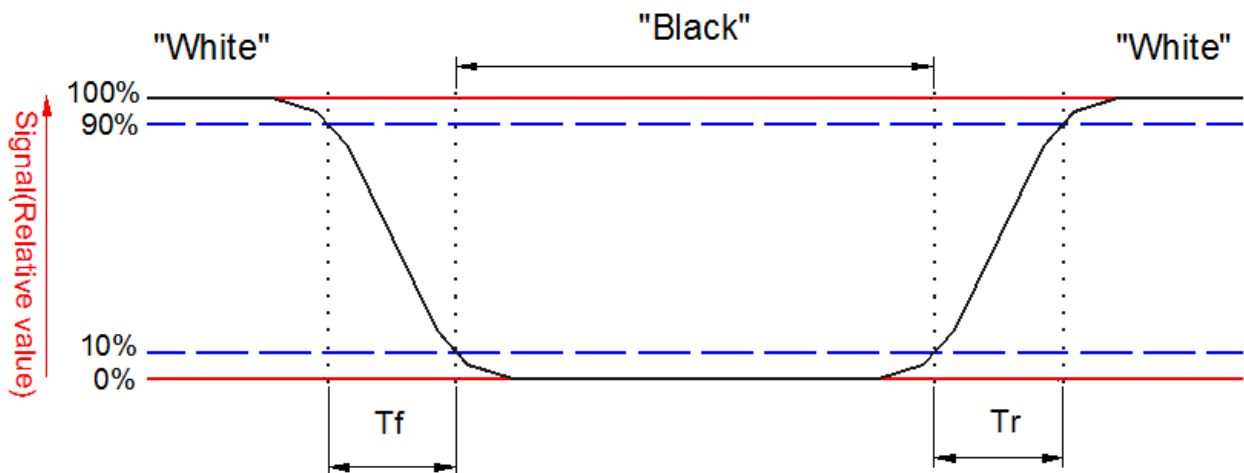


Note 9. Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

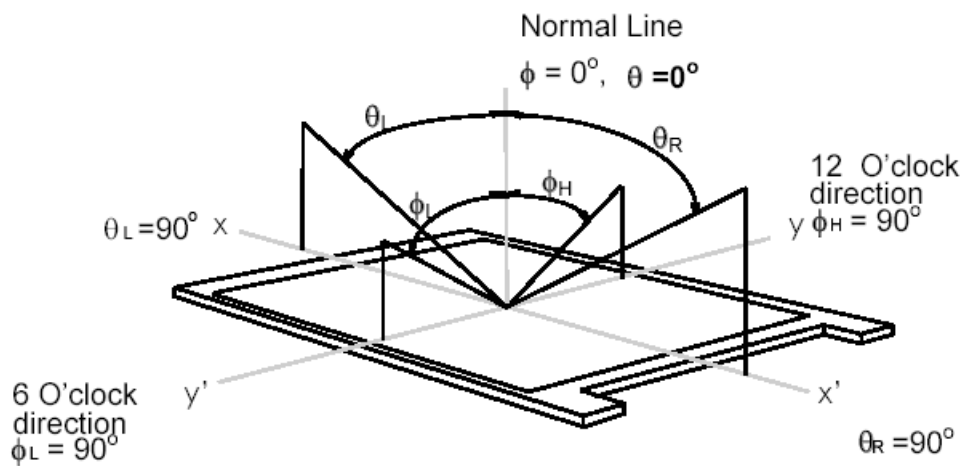

3. Functional Block Diagram

The following diagram shows the functional block of the 11.6 inches wide Color TFT/LCD 40 Pin

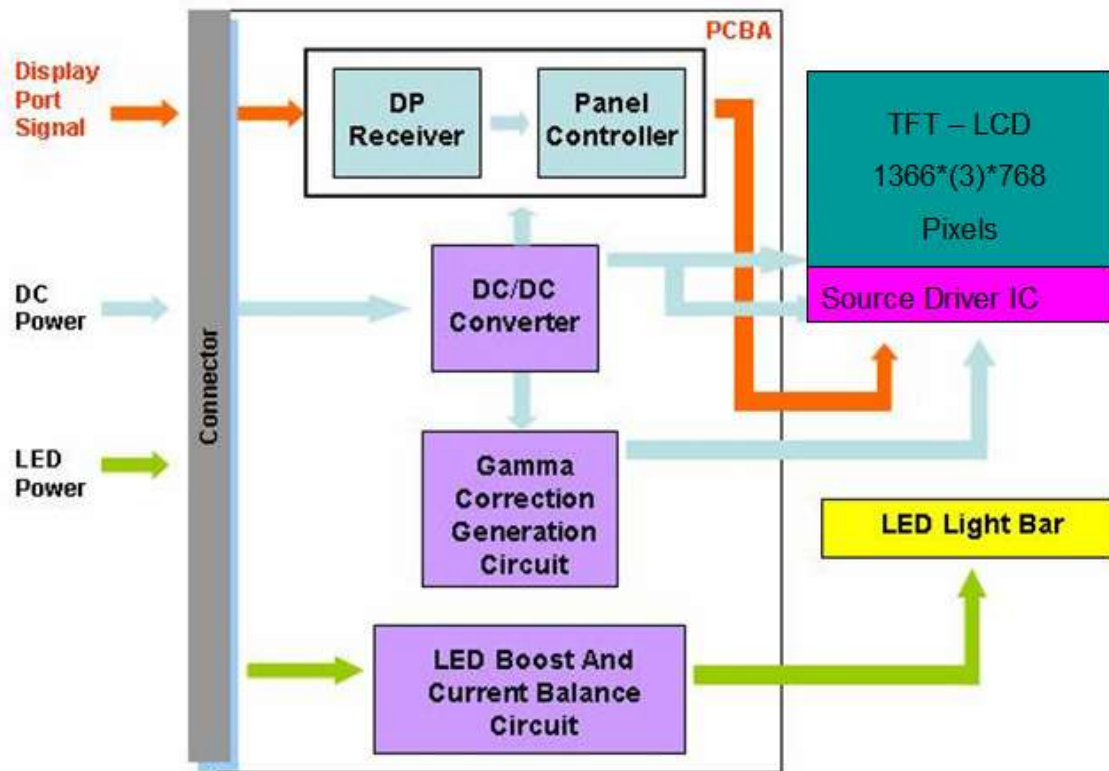

4. Absolute Maximum Ratings

An absolute maximum rating of the module is as following:

4.1 Absolute Ratings of TFT LCD Module

| Item | Symbol | Min | Max | Unit | Conditions |
|-------------------------|--------|------|------|--------|------------|
| Logic/LCD Drive Voltage | Vin | -0.3 | +4.0 | [Volt] | Note 1,2 |

4.2 Absolute Ratings of Touch Sensor Module

| Item | Symbol | Min | Max | Unit | Conditions |
|-----------------------------------|--------|------|-----|--------|------------|
| Touch Sensor Module Power Voltage | VTSP | -0.5 | 4 | [Volt] | |
| Touch Sensor Module Reset Signal | RST | -0.5 | 4 | [Volt] | |
| Touch Sensor Module enable Signal | TP_EN | -0.5 | 4 | [Volt] | |

4.3 Absolute Ratings of Environment

| Item | Symbol | Min | Max | Unit | Conditions |
|-----------------------|--------|-----|-----|-------|------------|
| Operating Temperature | TOP | 0 | +50 | [°C] | Note 4 |
| Operation Humidity | HOP | 5 | 95 | [%RH] | Note 4 |
| Storage Temperature | TST | -20 | +60 | [°C] | Note 4 |
| Storage Humidity | HST | 5 | 95 | [%RH] | Note 4 |

Note 1: At Ta (25°C)

Note 2: Permanent damage to the device may occur if exceed maximum values


Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

Note 5: The packing material of system forbid to involve ammonium component

Note 6: The reliability test conditions of system do not exceed the verified conditions of TFT module

Note 7: Be sure the panel test condition do not exceed the component limitation of TFT module(TN Liquid crystal , for example)

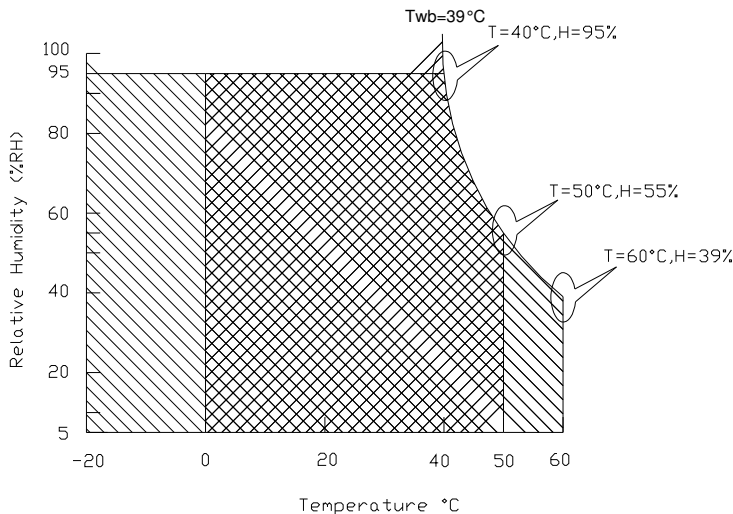

5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are as follows;



The power specification are measured under 25°C and frame frequency under 60Hz

| Symble | Parameter | Min | Typ | Max | Units | Note |
|--------|--|-----|-----|------|-------------|--------|
| VDD | Logic/LCD Drive Voltage | 3.0 | 3.3 | 3.6 | [Volt] | |
| PDD | VDD Power | - | 0.9 | 1.12 | [Watt] | Note 1 |
| IDD | IDD Current(RMS) | - | - | 373 | [mA] | Note 1 |
| IRush | Inrush Current | - | - | 2000 | [mA] | Note 2 |
| VDDrp | Allowable Logic/LCD Drive Ripple Voltage | - | - | 100 | [mV] p-p | |

Note 1: PDD(Typ)@Mosaic pattern Maximum Power, PDD(Max)@R/G/B pattern Maximum Power

$$IDD(Max) = PDD(Max) / VDD(Min)$$

Note 2 : Measure Condition

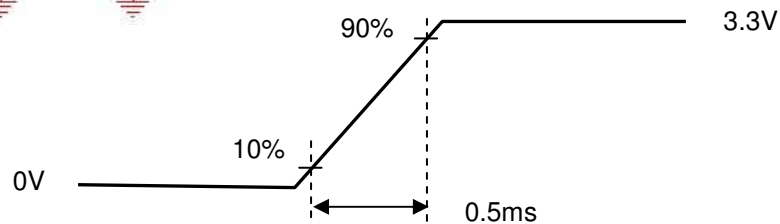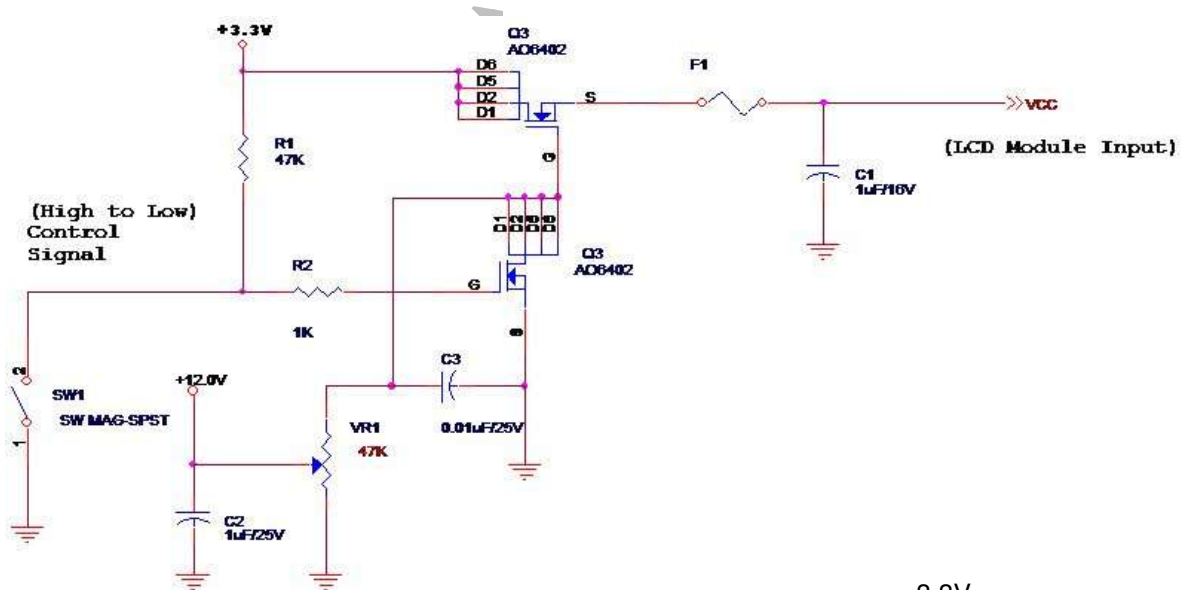

Vin rising time

5.1.2 Signal Electrical Characteristics


Signal electrical characteristics are as follows;

Display Port main link signal:

Differential pair VD+ , VD-
Which is one Display port
Main link

VCM of Display port
Main link


$$V_{diffP-P} = [(V_{D+}) - (V_{D-})] \times 2$$

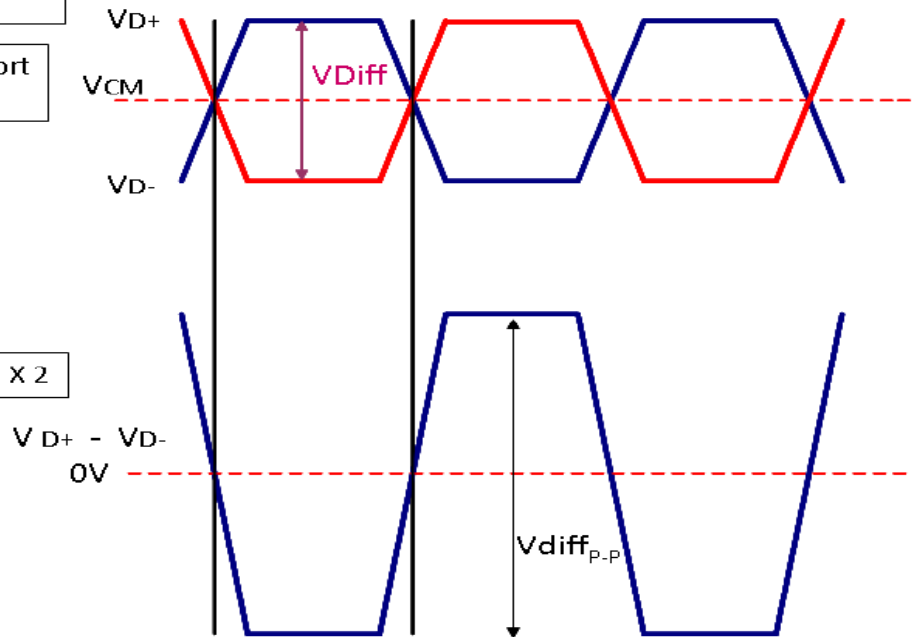

| Display port main link | | | | | |
|------------------------|--|-----|-----|------|------|
| | | Min | Typ | Max | unit |
| VCM | RX input DC Common Mode Voltage | | 0 | | V |
| VDiff _{P-P} | Peak-to-peak Voltage at a receiving Device | 150 | | 1320 | mV |

Follow as VESA display port standard V1.3

Display Port AUX_CH signal:

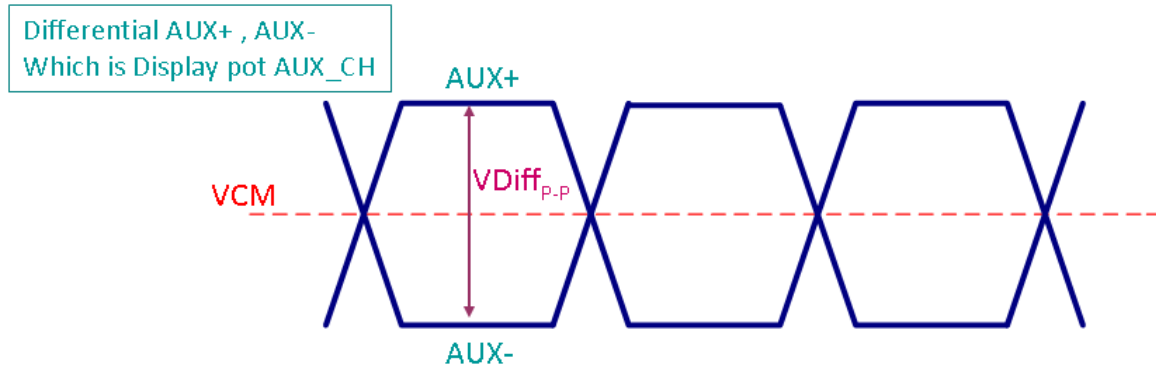

| Display port AUX_CH | | | | | |
|----------------------|--|-----|-----|-----|------|
| | | Min | Typ | Max | unit |
| VCM | AUX DC Common Mode Voltage | | 0 | | V |
| VDiff _{P-P} | AUX Peak-to-peak Voltage at a receiving Device | 270 | | 800 | mV |

Follow as VESA display port standard V1.3

Display Port VHPD signal:

| Display port VHPD | | | | | |
|-------------------|-------------|------|-----|-----|------|
| | | Min | Typ | Max | unit |
| VHPD | HPD Voltage | 2.25 | | 3.6 | V |

Follow as VESA display port standard V1.3



Product Specification

AU OPTRONICS CORPORATION

5.2 Backlight Unit

5.2.1 LED characteristics

| Parameter | Symbol | Min | Typ | Max | Units | Condition |
|-----------------------------|--------|--------|-----|-----|--------|--|
| Backlight Power Consumption | PLED | - | - | 1.7 | [Watt] | (Ta=25°C), Note 1 |
| LED Life-Time | N/A | 15,000 | - | - | Hour | (Ta=25°C), Note 2 I _F =25 mA |

Note 1: Calculator value for reference $P_{LED} = V_F$ (Normal Distribution) * I_F (Normal Distribution) / Efficiency

Note 2: The LED life-time define as the estimated time to 50% degradation of initial luminous.

5.2.2 Backlight input signal characteristics

| Parameter | Symbol | Min | Typ | Max | Units | Remark |
|-----------------------------|------------------|-----|------|------|--------|--|
| LED Power Supply | VLED (Note 1) | 5.0 | 12.0 | 21.0 | [Volt] | Define as Connector Interface (Ta=25°C) |
| LED Enable Input High Level | VLED_EN | 2.5 | - | 5.5 | [Volt] | |
| LED Enable Input Low Level | | - | - | 0.5 | [Volt] | |
| PWM Logic Input High Level | VPWM_EN | 2.5 | - | 5.5 | [Volt] | |
| PWM Logic Input Low Level | | - | - | 0.5 | [Volt] | |
| PWM Input Frequency | FPWM | 200 | 1K | 10K | Hz | |
| PWM Duty Ratio | Duty | 5 | -- | 100 | % | |

Note 1 : Recommend system pull up/down resistor no bigger than 10Kohm



Product Specification

AU OPTRONICS CORPORATION

5.3 Touch Sensor Module

5.3.1 Power Specification

| Items | Symbol | | Specifications | | | Unit | Notes |
|--|------------|--------|----------------|------|------|------|-------|
| | | | Min. | Typ. | Max. | | |
| Touch sensor module Power Supply | VTSP | | 3.15 | 3.3 | 3.6 | V | |
| Touch sensor module Power Consumption | PTP | Active | - | - | 400 | | |
| | | Idle | - | - | 100 | | |
| | | Sleep | - | - | 0.5 | | |
| Touch Sensor Module Power ripple | VTSPrp | | - | - | 100 | mV | |
| Input Voltage | RST, TP_EN | VIH | 2.64 | | 3.3 | V | |
| | | VIL | 0 | | 0.66 | V | |

6.2 Integration Interface Requirement

6.2.1 Connector Description

Physical interface is described as for the connector on module.


These connectors are capable of accommodating the following signals and will be following components.

| Connector Name / Designation | For Signal Connector |
|------------------------------|------------------------------|
| Manufacturer | JAE or Compatible |
| Type / Part Number | JAE HD1S040HA1 or compatible |
| Mating Housing/Part Number | JAE HD1P040MA1 or compatible |

6.2.2 Pin Assignment (with Touch Sensor Pin Assignment)


| PIN NO | Symbol | Function |
|--------|---------------------|--|
| 1 | NC | No Connect (Reserved for DCR) |
| 2 | H_GND | High Speed Ground |
| 3 | NC | No Connect |
| 4 | NC | No Connect |
| 5 | H_GND | High Speed Ground |
| 6 | Lane0_N | Comp Signal Link Lane 0 |
| 7 | Lane0_P | True Signal Link Lane 0 |
| 8 | H_GND | High Speed Ground |
| 9 | AUX_CH_P | True Signal Auxiliary Ch. |
| 10 | AUX_CH_N | Comp Signal Auxiliary Ch. |
| 11 | H_GND | High Speed Ground |
| 12 | LCD_VCC | LCD logic and driver power |
| 13 | LCD_VCC | LCD logic and driver power |
| 14 | LCD_Self_Test or NC | LCD Panel Self Test Enable (Optional) |
| 15 | LCD_GND | LCD logic and driver ground |
| 16 | LCD_GND | LCD logic and driver ground |
| 17 | HPD | HPD signal pin |
| 18 | BL_GND | Backlight ground |
| 19 | BL_GND | Backlight ground |
| 20 | BL_GND | Backlight ground |
| 21 | BL_GND | Backlight ground |
| 22 | BL_Enable | Backlight On / Off |
| 23 | BL_PWM_DIM | System PWM signal Input |
| 24 | NC | No connect (Reverse for TEST only) |
| 25 | NC | No connect (Reverse for TEST only) |
| 26 | BL_PWR | Backlight power |
| 27 | BL_PWR | Backlight power |
| 28 | BL_PWR | Backlight power |
| 29 | BL_PWR | Backlight power |
| 30 | NC | No Connect (Reserved for CM) |
| 31 | TP_D- | USB Data- for Touch (NC for I2C input) |
| 32 | TP_D+ | USB Data+ for Touch (NC for I2C input) |
| 33 | GND | Ground |

| | | |
|----|-------------------|---|
| 34 | VTSP | Touch panel power supply |
| 35 | VTSP | Touch panel power supply |
| 36 | NC/TP_EN | Reserve for Touch function enable (Low_Disable & High_Enable) |
| 37 | TP_CLK | I2C Clock for Touch (NC for USB input) |
| 38 | TP_Data | I2C Data for Touch (NC for USB input) |
| 39 | TP_I2C INT | Touch panel I2C-INT(NC for USB input) |
| 40 | TP_RST | Touch panel IC reset, Low active |

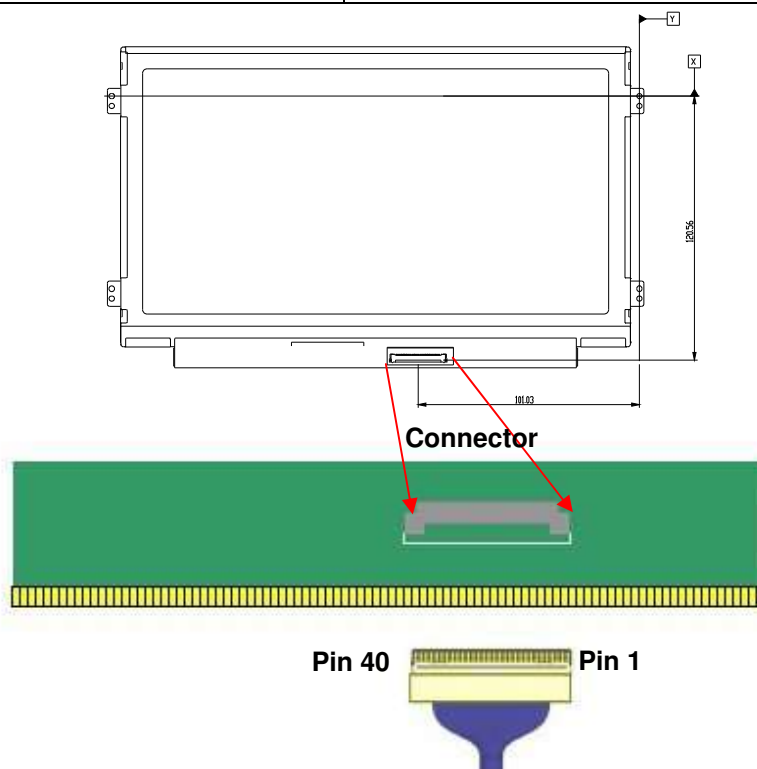

Note1: Start from right side.

Note2: Input signals shall be low or High-impedance state when VDD is off.
Internal circuit of **eDP inputs** are as following.

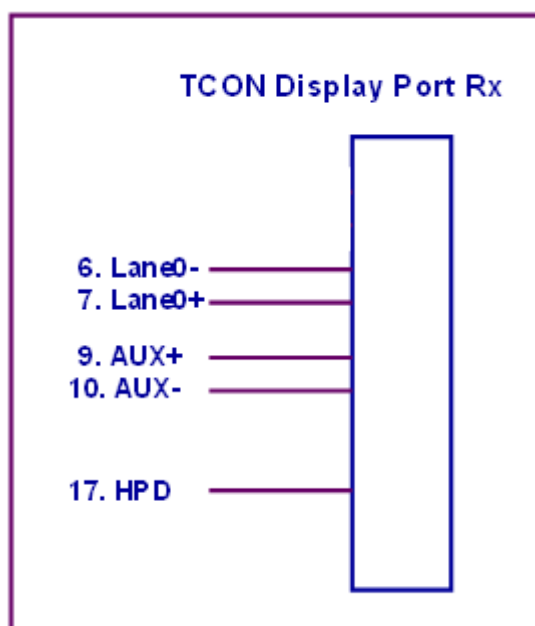

6.3 Interface Timing

6.3.1 Timing Characteristics


For normal display, interface timings should match the 1366x768 /60Hz manufacturing guide line timing.

| Parameter | | Symbol | Min. | Typ. | Max. | Unit |
|-----------------------|----------|-----------------------|------|------|--------|--------------------|
| Frame Rate | | - | - | 60 | - | Hz |
| Clock frequency | | 1/ T _{Clock} | 67 | 69.3 | 76.3 | MHz |
| Vertical Section | Period | T _V | 778 | 793 | 768+A | T _{Line} |
| | Active | T _{VD} | 768 | | | |
| | Blanking | T _{VB} | 20 | 25 | A | |
| Horizontal Section | Period | T _H | 1416 | 1456 | 1366+B | T _{Clock} |
| | Active | T _{HD} | 1366 | | | |
| | Blanking | T _{HB} | 50 | 90 | B | |

Note 1 : The above is as optimized setting

Note 2 : The maximum clock frequency = $(1366+B) \times (768+A) \times 60 < 76.3\text{MHz}$


6.3.2 Timing diagram

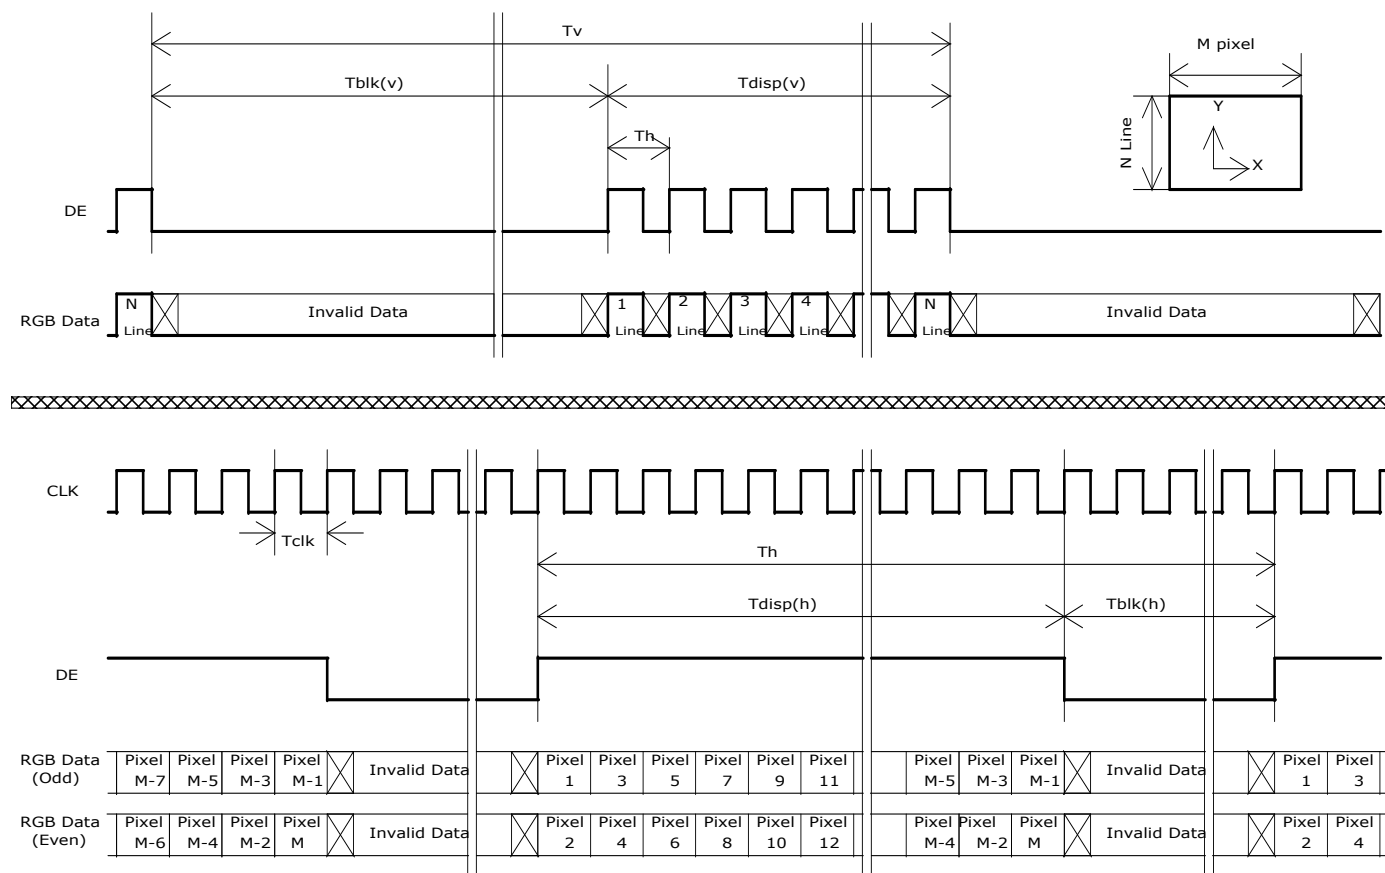

6.4 Power ON/OFF Sequence


Power on/off sequence is as follows. Interface signals and LED on/off sequence are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off

Display Port panel power sequence:

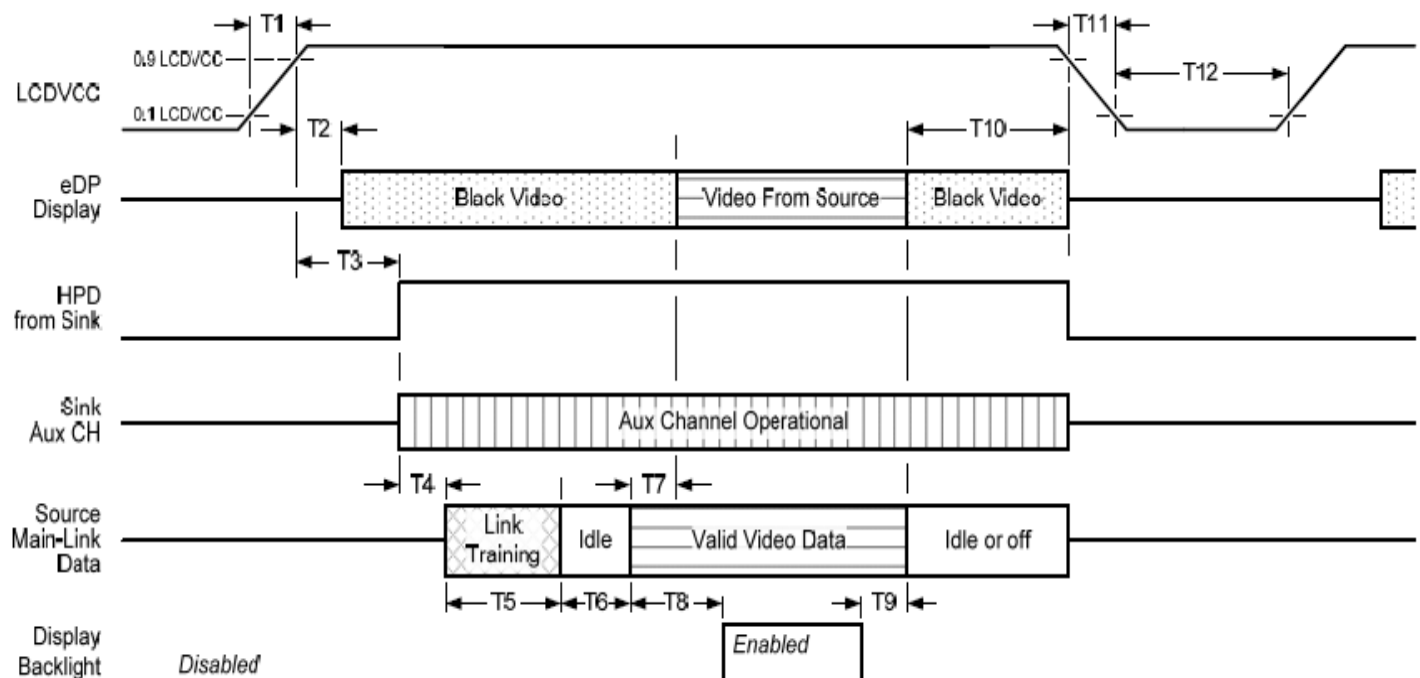

Display port interface power up/down sequence, normal system operation

Display Port AUX_CH transaction only:

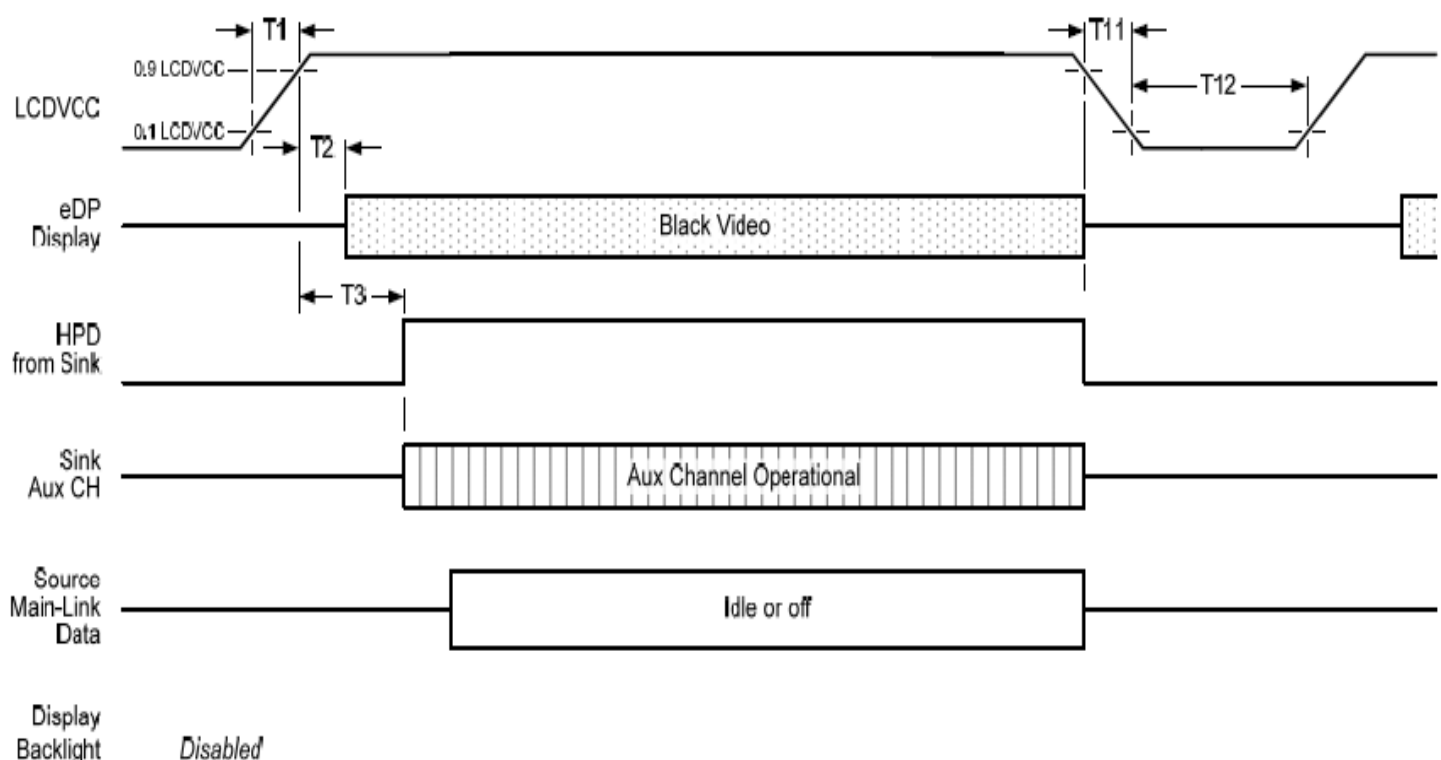

Display port interface power up/down sequence, AUX_CH transaction only



Product Specification

AU OPTRONICS CORPORATION

Display Port panel power sequence timing parameter:

| Timing parameter | Description | Reqd. by | Limits | | | Notes |
|------------------|---|----------|--------|------|-------|--|
| | | | Min. | Typ. | Max. | |
| T1 | power rail rise time, 10% to 90% | source | 0.5ms | | 10ms | |
| T2 | delay from LCDVDD to black video generation | sink | 0ms | | 200ms | prevents display noise until valid video data is received from the source |
| T3 | delay from LCDVDD to HPD high | sink | 0ms | | 200ms | sink AUX_CH must be operational upon HPD high. |
| T4 | delay from HPD high to link training initialization | source | | | | allows for source to read link capability and initialize. |
| T5 | link training duration | source | | | | dependant on source link to read training protocol. |
| T6 | link idle | source | | | | Min accounts for required BS-Idle pattern. Max allows for source frame synchronization. |
| T7 | delay from valid video data from source to video on display | sink | 0ms | | 50ms | max allows sink validate video data and timing. |
| T8 | delay from valid video data from source to backlight enable | source | | | | source must assure display video is stable. |
| T9 | delay from backlight disable to end of valid video data | source | | | | source must assure backlight is no longer illuminated. |
| T10 | delay from end of valid video data from source to power off | source | 0ms | | 500ms | |
| T11 | power rail fall time, 90% to 10% | source | | | 10ms | |
| T12 | power off time | source | 500ms | | | |


Note1: The sink must include the ability to generate black video autonomously. The sink must automatically enable black video under the following conditions:

- upon LCDVDD power on (with in T2 max)-when the "Novideostream_Flag" (VB-ID Bit 3) is received from the source (at the end of T9).
- when no main link data, or invalid video data, is received from the source. Black video must be displayed within 64ms (typ) from the start of either condition. Video data can be deemed invalid based on MSA and timing information, for example.


Note 2: The sink may implement the ability to disable the black video function, as described in Note 1, above, for system development and debugging purpose.

Note 3: The sink must support AUX_CH polling by the source immediately following LCDVDD power on without causing damage to the sink device (the source can re-try if the sink is not ready). The sink must be able to respond to an AUX_CH transaction with the time specified within T3 max.

Display Port panel B/L power sequence timing parameter:

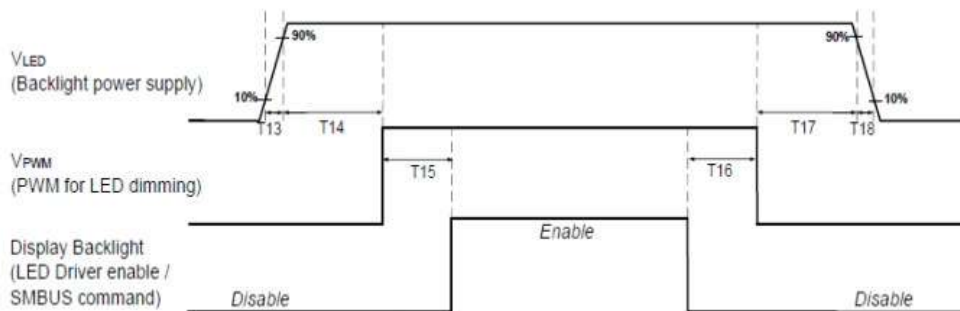

Note : When the adapter is hot plugged, the backlight power supply sequence is shown as below.

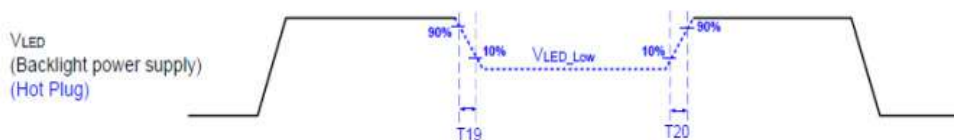


| | Min (ms) | Max (ms) |
|-----|----------|----------|
| T13 | 0.5 | 10 |
| T14 | 10 | - |
| T15 | 0 | - |
| T16 | 0 | - |
| T17 | 10 | - |
| T18 | 0.5 | 10 |
| T19 | 1* | - |
| T20 | 1* | - |

Seamless change: $T19/T20 = 5 \times T_{PWM}^*$

* $T_{PWM} = 1/\text{PWM Frequency}$

Touch Panel Power on Sequence

I2C

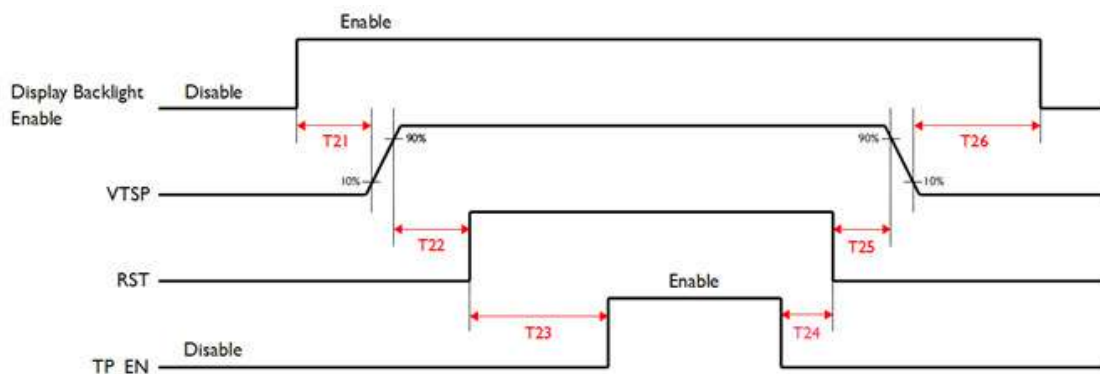

| | Min | Max |
|-----|-------|-----|
| T21 | 10ms | - |
| T22 | 1ms | - |
| T23 | 20ms | - |
| T24 | 2ms | - |
| T25 | 2ms | - |
| T26 | 100ms | - |

7. Panel Reliability Test

7.1 Vibration Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 1.5 G
- Frequency: 10 - 500Hz Random
- Sweep: 30 Minutes each Axis (X, Y, Z)

7.2 Shock Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 220 G , Half sine wave
- Active time: 2 ms
- Pulse: X,Y,Z .one time for each side

7.3 Reliability Test

| Items | Required Condition | Note |
|----------------------------|---|--------|
| Temperature Humidity Bias | Ta= 40℃, 90%RH, 240h | |
| High Temperature Operation | Ta= 50℃, Dry, 240h | |
| Low Temperature Operation | Ta=0℃, 240h | |
| High Temperature Storage | Ta= 60℃, 240h | |
| Low Temperature Storage | Ta= -20℃, 240h | |
| Thermal Shock Test | Ta=-20℃(30min) ~60℃(30min), 20cycles condition. | |
| ESD | Contact : ±8 KV Air : ±15 KV | Note 1 |


Note1: According to EN 61000-4-2 , ESD class B: Some performance degradation allowed. No data lost
 . Self-recoverable. No hardware failures.

Remark: MTBF (Excluding the LED): 30,000 hours with a confidence level 90%


8. Mechanical Characteristics

8.1 Total Solution Outline Dimension

8.1.1 Standard Front View

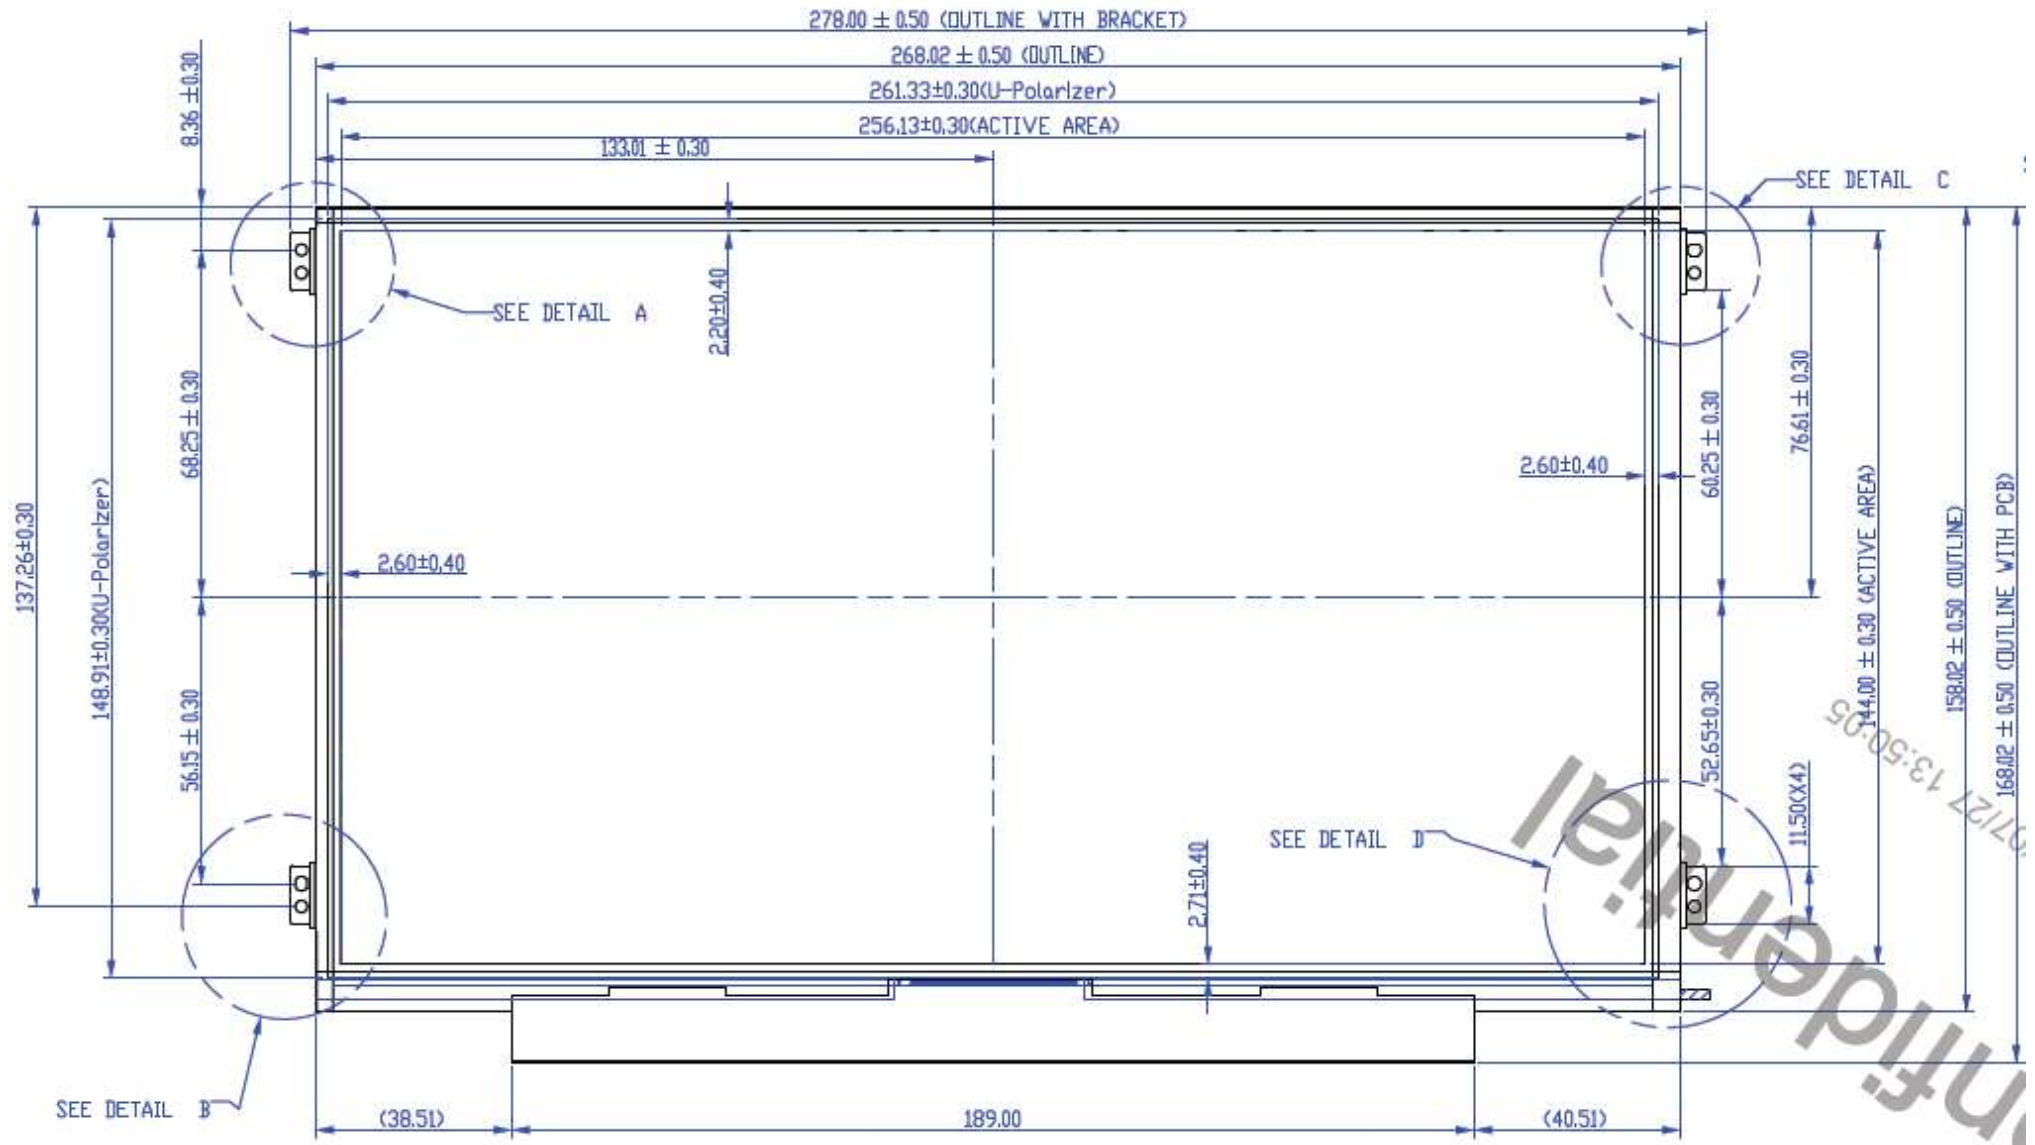

8.1.2 Standard Back View

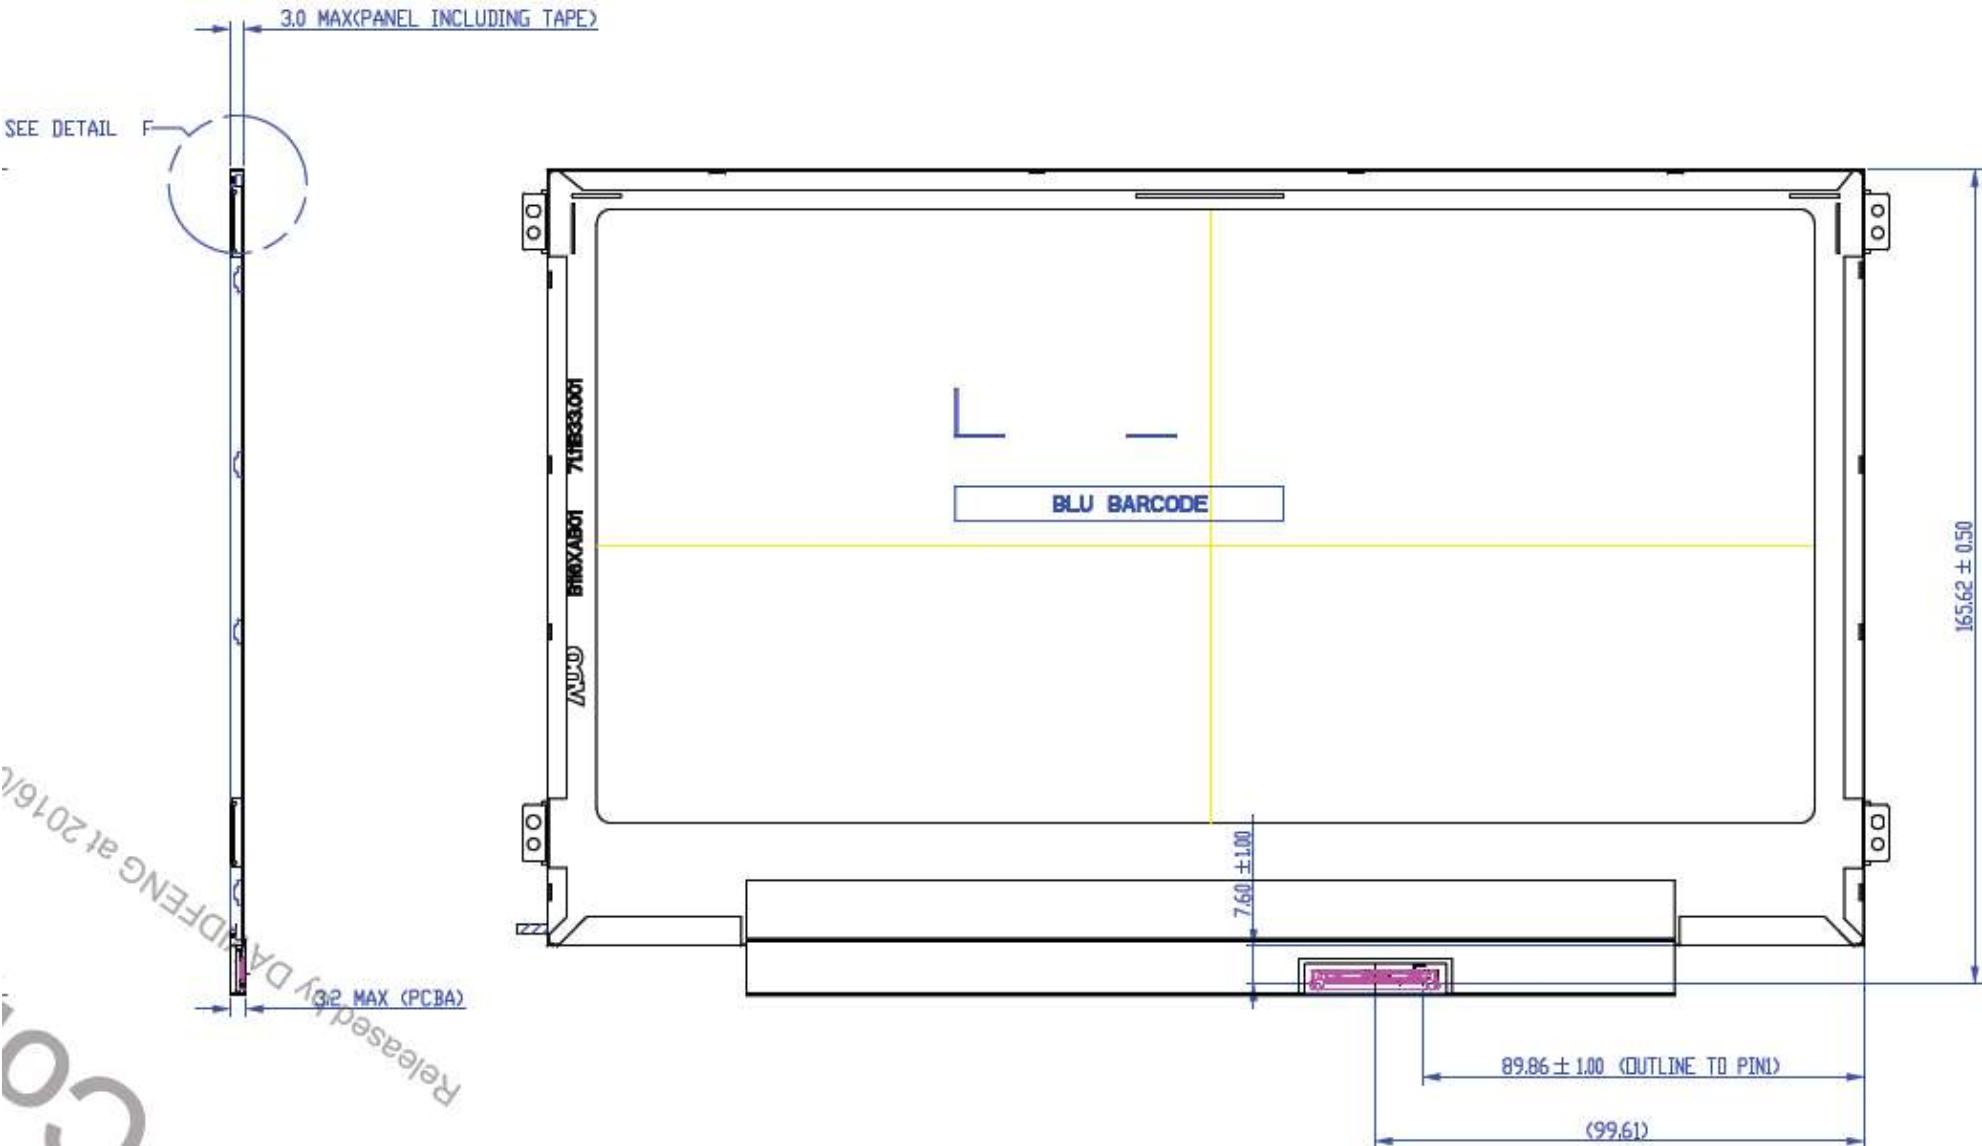

Note: AUO using caliper to measure outline dimension



Product Specification


AU OPTRONICS CORPORATION

9. Shipping and Package

9.1 Shipping Label Format

| | | |
|--|---|---|
|  XXXXXXXXXXXX-XXXXXX | Manufactured YY/WW Model No: B116XAK01.1 AU Optronics MADE IN CHINA (S01) H/W: 3A F/W:0 |    |
|  CT: CHLWA01 XXXXXXXX | | |

9.2 Shipping Package of Palletizing Sequence

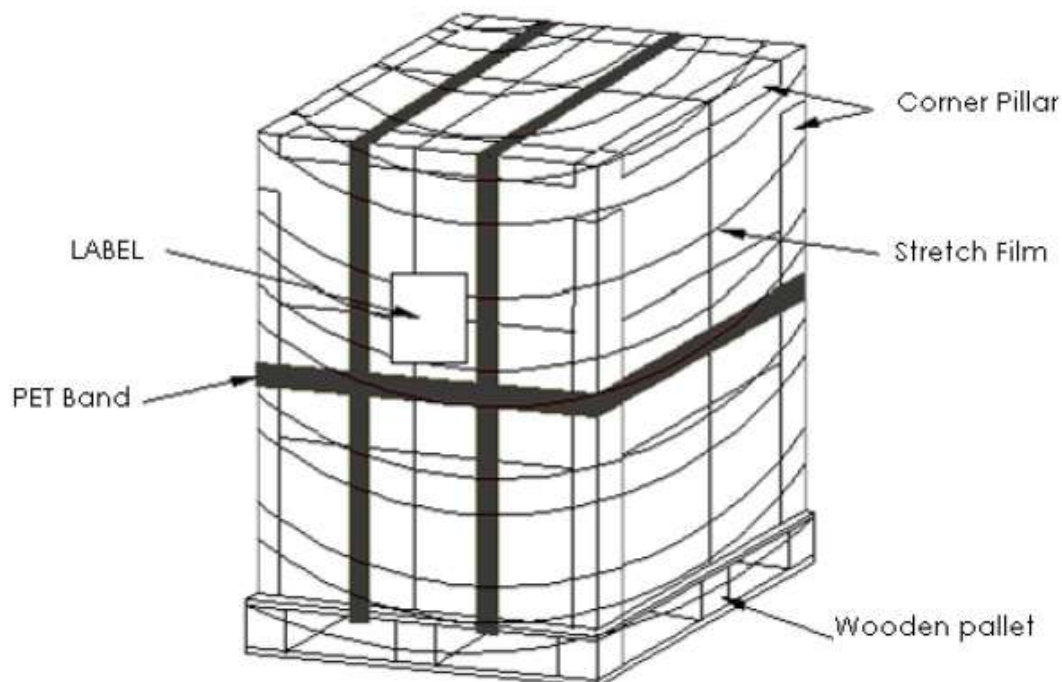



Product Specification

AU OPTRONICS CORPORATION

10. Appendix:

10.1 EDID Description

| Address | FUNCTION | Value | Value | Value | Note |
|---------|--|-------|----------|-------|------|
| HEX | | HEX | BIN | DEC | |
| 00 | Header | 00 | 00000000 | 0 | |
| 01 | | FF | 11111111 | 255 | |
| 02 | | FF | 11111111 | 255 | |
| 03 | | FF | 11111111 | 255 | |
| 04 | | FF | 11111111 | 255 | |
| 05 | | FF | 11111111 | 255 | |
| 06 | | FF | 11111111 | 255 | |
| 07 | | 00 | 00000000 | 0 | |
| 08 | EISA Manuf. Code LSB | 06 | 00000110 | 6 | |
| 09 | Compressed ASCII | AF | 10101111 | 175 | |
| 0A | Product Code | 5C | 01011100 | 92 | |
| 0B | hex, LSB first | 11 | 00010001 | 17 | |
| 0C | 32-bit ser # | 00 | 00000000 | 0 | |
| 0D | | 00 | 00000000 | 0 | |
| 0E | | 00 | 00000000 | 0 | |
| 0F | | 00 | 00000000 | 0 | |
| 10 | Week of manufacture | 00 | 00000000 | 0 | |
| 11 | Year of manufacture | 1B | 00011011 | 27 | |
| 12 | EDID Structure Ver. | 01 | 00000001 | 1 | |
| 13 | EDID revision # | 04 | 00000100 | 4 | |
| 14 | Video input def. (digital I/P, non-TMDS, CRGB) | 95 | 10010101 | 149 | |
| 15 | Max H image size (rounded to cm) | 1A | 00011010 | 26 | |
| 16 | Max V image size (rounded to cm) | 0E | 00001110 | 14 | |
| 17 | Display Gamma $(=(\text{gamma} \times 100) - 100)$ | 78 | 01111000 | 120 | |
| 18 | Feature support (no DPMS, Active OFF, RGB, tmg Blk#1) | 02 | 00000010 | 2 | |
| 19 | Red/green low bits (Lower 2:2:2:2 bits) | 99 | 10011001 | 153 | |
| 1A | Blue/white low bits (Lower 2:2:2:2 bits) | 85 | 10000101 | 133 | |
| 1B | Red x (Upper 8 bits) | 95 | 10010101 | 149 | |
| 1C | Red y/ highER 8 bits | 55 | 01010101 | 85 | |
| 1D | Green x | 56 | 01010110 | 86 | |
| 1E | Green y | 92 | 10010010 | 146 | |
| 1F | Blue x | 28 | 00101000 | 40 | |
| 20 | Blue y | 22 | 00100010 | 34 | |
| 21 | White x | 50 | 01010000 | 80 | |
| 22 | White y | 54 | 01010100 | 84 | |
| 23 | Established timing 1 | 00 | 00000000 | 0 | |
| 24 | Established timing 2 | 00 | 00000000 | 0 | |
| 25 | Established timing 3 | 00 | 00000000 | 0 | |
| 26 | Standard timing #1 | 01 | 00000001 | 1 | |
| 27 | | 01 | 00000001 | 1 | |



Product Specification

AU OPTRONICS CORPORATION

| | | | | | |
|----|--|----|----------|-----|-----------------|
| 28 | Standard timing #2 | 01 | 00000001 | 1 | |
| 29 | | 01 | 00000001 | 1 | |
| 2A | Standard timing #3 | 01 | 00000001 | 1 | |
| 2B | | 01 | 00000001 | 1 | |
| 2C | Standard timing #4 | 01 | 00000001 | 1 | |
| 2D | | 01 | 00000001 | 1 | |
| 2E | Standard timing #5 | 01 | 00000001 | 1 | |
| 2F | | 01 | 00000001 | 1 | |
| 30 | Standard timing #6 | 01 | 00000001 | 1 | |
| 31 | | 01 | 00000001 | 1 | |
| 32 | Standard timing #7 | 01 | 00000001 | 1 | |
| 33 | | 01 | 00000001 | 1 | |
| 34 | Standard timing #8 | 01 | 00000001 | 1 | |
| 35 | | 01 | 00000001 | 1 | |
| 36 | Pixel Clock/10000 LSB | CE | 11001110 | 206 | |
| 37 | Pixel Clock/10000 USB | 1D | 00011101 | 29 | |
| 38 | Horz active Lower 8bits | 56 | 01010110 | 86 | |
| 39 | Horz blanking Lower 8bits | EA | 11101010 | 234 | |
| 3A | HorzAct:HorzBlk Upper 4:4 bits | 50 | 01010000 | 80 | |
| 3B | Vertical Active Lower 8bits | 00 | 00000000 | 0 | |
| 3C | Vertical Blanking Lower 8bits | 1A | 00011010 | 26 | |
| 3D | Vert Act : Vertical Blanking (upper 4:4 bit) | 30 | 00110000 | 48 | |
| 3E | HorzSync. Offset | 30 | 00110000 | 48 | |
| 3F | HorzSync.Width | 20 | 00100000 | 32 | |
| 40 | VertSync.Offset : VertSync.Width | 46 | 01000110 | 70 | |
| 41 | Horz&Vert Sync Offset/Width Upper 2bits | 00 | 00000000 | 0 | |
| 42 | Horizontal Image Size Lower 8bits | 00 | 00000000 | 0 | |
| 43 | Vertical Image Size Lower 8bits | 90 | 10010000 | 144 | |
| 44 | Horizontal & Vertical Image Size (upper 4:4 bits) | 10 | 00010000 | 16 | |
| 45 | Horizontal Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 | |
| 46 | Vertical Border <i>(zero for internal LCD)</i> | 00 | 00000000 | 0 | |
| 47 | Signal <i>(non-intr, norm, no stereo, sep sync, neg pol)</i> | 18 | 00011000 | 24 | |
| 48 | Pixel Clock/10,000 (LSB) | DF | 11011111 | 223 | 40Hz frame rate |
| 49 | Pixel Clock/10,000 (MSB) | 13 | 00010011 | 19 | |
| 4A | Horizontal Addressable Pixels, lower 8 bits | 56 | 01010110 | 86 | |
| 4B | Horizontal Blanking Pixels, lower 8 bits | EA | 11101010 | 234 | |
| 4C | H Pixels, upper nibble : H Blanking, upper nibble | 50 | 01010000 | 80 | |
| 4D | Vertical Addressable Lines, lower 8 bits | 00 | 00000000 | 0 | |
| 4E | Vertical Blanking Lines, lower 8 bits | 1A | 00011010 | 26 | |
| 4F | V lines, upper nibble : V blanking, upper nibble | 30 | 00110000 | 48 | |
| 50 | Horizontal Front Porch, lower 8 bits | 30 | 00110000 | 48 | |
| 51 | Horizontal Sync Pulse, lower 8 bits | 20 | 00100000 | 32 | |
| 52 | V Front Porch, lower nibble : V Sync Pulse, lower nibble | 46 | 01000110 | 70 | |
| 53 | VFP, 2 bits: VSP 2 bits: HFP 2 bits: HFP 2 bits | 00 | 00000000 | 0 | |
| 54 | Horizontal Image Size in mm, lower 8 bits | 00 | 00000000 | 0 | |



Product Specification

AU OPTRONICS CORPORATION

| | | | | | |
|----|---|----|----------|-----|----------------------|
| 55 | Vertical Image Size in mm, lower 8 bits | 90 | 10010000 | 144 | |
| 56 | H Image Size, upper nibble : V Image Size, upper nibble | 10 | 00010000 | 16 | |
| 57 | Horizontal Border | 00 | 00000000 | 0 | |
| 58 | Vertical Border | 00 | 00000000 | 0 | |
| 59 | Bit Encode Sync Information | 18 | 00011000 | 24 | |
| 5A | DC | 00 | 00000000 | 0 | nVDPS Reserved 00 |
| 5B | HTOTAL | 00 | 00000000 | 0 | |
| 5C | HA | 00 | 00000000 | 0 | |
| 5D | HBL | 00 | 00000000 | 0 | |
| 5E | HFP | 00 | 00000000 | 0 | |
| 5F | HFPe | 00 | 00000000 | 0 | |
| 60 | HBP | 00 | 00000000 | 0 | |
| 61 | HB | 00 | 00000000 | 0 | |
| 62 | HSO | 00 | 00000000 | 0 | |
| 63 | HS | 00 | 00000000 | 0 | |
| 64 | VTOTAL | 00 | 00000000 | 0 | |
| 65 | VA | 00 | 00000000 | 0 | |
| 66 | VBL | 00 | 00000000 | 0 | |
| 67 | VFP | 00 | 00000000 | 0 | |
| 68 | VBP | 00 | 00000000 | 0 | |
| 69 | VB | 00 | 00000000 | 0 | |
| 6A | VSO | 00 | 00000000 | 0 | |
| 6B | VS | 00 | 00000000 | 0 | Header |
| 6C | Detail Timing Description #4 | 00 | 00000000 | 0 | |
| 6D | Flag | 00 | 00000000 | 0 | |
| 6E | Reserved | 00 | 00000000 | 0 | |
| 6F | For Brightness Table and Power Consumption | 02 | 00000010 | 2 | Brightness Table |
| 70 | Flag | 00 | 00000000 | 0 | |
| 71 | PWM % [7:0] @ Step 0 | 10 | 00010000 | 16 | |
| 72 | PWM % [7:0] @ Step 5 | 48 | 01001000 | 72 | |
| 73 | PWM % [7:0] @ Step 10 | FF | 11111111 | 255 | Power Consumption |
| 74 | Nits [7:0] @ Step 0 | 0F | 00001111 | 15 | |
| 75 | Nits [7:0] @ Step 5 | 3C | 00111100 | 60 | |
| 76 | Nits [7:0] @ Step 10 | 6E | 01101110 | 110 | |
| 77 | Panel Electronics Power @ 32x32 Chess Pattern = | 12 | 00010010 | 18 | Power Consumption |
| 78 | Backlight Power @ 60 nits = | 0A | 00001010 | 10 | |
| 79 | Backlight Power @ Step 10 = | 12 | 00010010 | 18 | |
| 7A | Nits @ 100% PWM Duty = | 6E | 01101110 | 110 | |
| 7B | Flag | 20 | 00100000 | 32 | |
| 7C | Flag | 20 | 00100000 | 32 | |
| 7D | Flag | 20 | 00100000 | 32 | |
| 7E | Extension Flag | 00 | 00000000 | 0 | |
| 7F | Checksum | 64 | 01100100 | 100 | |